
NOTES:


- 1. SUBSTRATE: ND FILTER GLASS
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 arcsec




4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

NOT MANUFACTURE PARTS TO THIS DRAWING



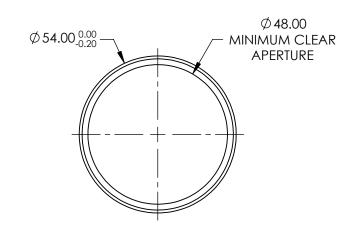



NEUTRAL DENSITY FILTER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2
SHAPE	PLANO	PLANO
SURFACE QUALITY	80-50	80-50
CLEAR APERTURE	Ø48	Ø48
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED
	•	•

			Eamuna Optic	S®
THIRD ANGLE PROJECTION	ϕ	TITLE	OD 0.6, M52.0 X 0.75 MOUNTED ABSOF ND FILTER	RPTIVE
ALL DIMS IN	mm	DWG NO	54736	SHEET 1 OF 1