

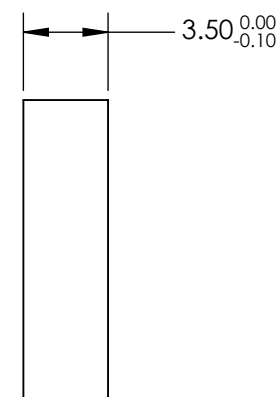
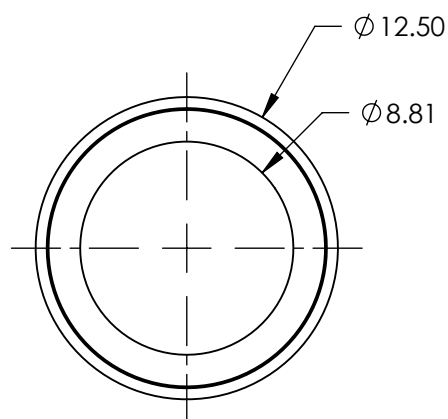


**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**



BANDPASS FILTER

REV A	VALUE
CENTER WAVELENGTH (CWL)	325 ± 2nm
FULL WIDTH HALF MAX (FWHM)	2.3± 2nm
MINIMUM TRANSMISSION	≥80 %
BLOCKING	299 - 320.1 & 329.9 - 357.5
SURFACE QUALITY	60-40
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	HARD COATED
DURABILITY	DURABILITY: MIL-C-48497A SECT. 3.4.1
ENVIRONMENTAL	ENVIRONMENTAL: MIL-STD-810F SECT. 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO[®] Edmund Optics[®]



THIRD ANGLE
PROJECTION

TITLE

OD6, Ø12.5mm, 325 nm CWL, 1.2 nm
BANDWIDTH, LASER LINE BANDPASS FILTER

ALL DIMS IN

mm

DWG NO

68926

SHEET
1 OF 1