

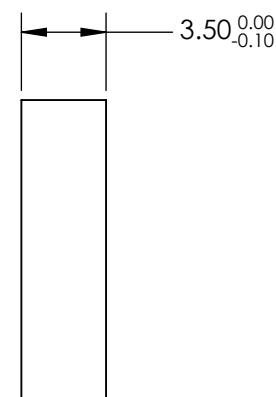
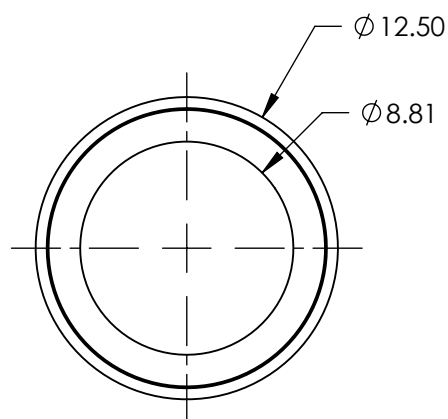


**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**



BANDPASS FILTER

REV A	VALUE
CENTER WAVELENGTH (CWL)	514.5 ± 2nm
FULL WIDTH HALF MAX (FWHM)	3.6± 2nm
MINIMUM TRANSMISSION	≥90 %
BLOCKING	473.3 - 506.8 & 522.2 - 566
SURFACE QUALITY	60-40
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	HARD COATED
DURABILITY	DURABILITY: MIL-C-48497A SECT. 3.4.1
ENVIRONMENTAL	ENVIRONMENTAL: MIL-STD-810F SECT. 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO[®] Edmund Optics[®]



THIRD ANGLE
PROJECTION

ALL DIMS IN

mm

TITLE

OD6, Ø12.5mm, 514.5 nm CWL, 2 nm
BANDWIDTH, LASER LINE BANDPASS FILTER

DWG NO

68938

SHEET
1 OF 1