

PARTS TO THIS DRAWING



1 OF 1

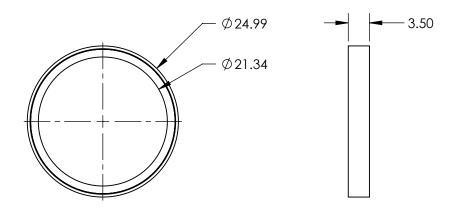



RΑ	NDP	22 A	FII	TFR

REV A	VALUE
CENTER WAVELENGTH (CWL)	980 ± 2nm
FULL WIDTH HALF MAX (FWHM)	6.9± 2nm
MINIMUM TRANSMISSION	≥90 %
BLOCKING	901.6 - 965.3 & 994.7 - 1078
SURFACE QUALITY	60-40
COATING TYPE	HARD COATED
DURABILITY	DURABILITY: MIL-C-48497A SECT. 3.4.1
ENVIRONMENTAL	ENVIRONMENTAL: MIL-STD-810F SECT. 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

			Edmund Option	;S®
THIRD ANGLE PROJECTION		TITLE	OD6, Ø25mm, 980 nm CWL, 3.7 nm BANDWIDTH, LASER LINE BANDPASS FILTER	
ALL DIMS IN	mm	DWG NO	68983	SHEET 1 OF 1