

NOTES:



- 1. SUBSTRATE MATERIAL:
N-BK7
- 2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: MgF2



R(avg) ≤1.75% @ 400 - 700nm

- 3. FINE GROUND SURFACE
- 4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
- 5. RoHS COMPLIANT

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

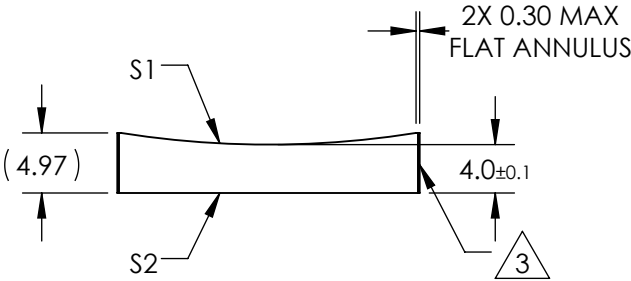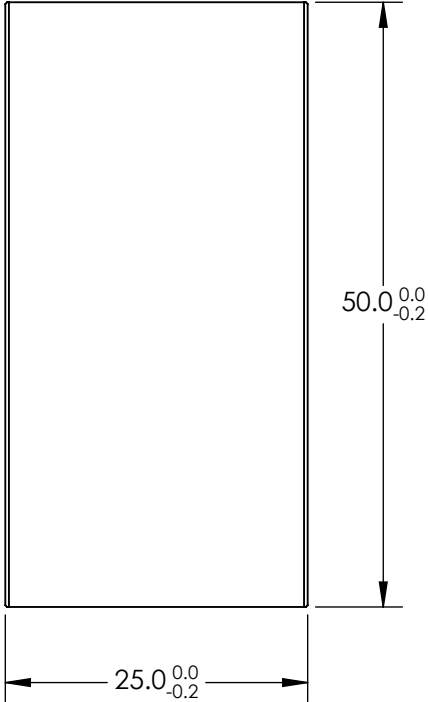

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	<div><div>EFL</div><div>-150</div></div> <div><div>BFL</div><div>-152.64</div></div> <div><div> Edmund Optics®</div></div>					
SHAPE	CONVEX	PLANO						
RADIUS	-77.52	∞						
SURFACE QUALITY	60-40	60-40	<div>THIRD ANGLE PROJECTION</div> <div></div>		TITLE	25mm H X 50mm L X -150mm FL MgF2 COATED,CYLINDER LENS		
CLEAR APERTURE	24.00 X 49.00	24.00 X 49.00						
COATING APERTURE	24.00 X 49.00	24.00 X 49.00						
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	68085	SHEET 1 OF 1	