

NOTES:

1. SUBSTRATE MATERIAL:  
N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)




S1 & S2: NIR I

R(avg) ≤0.5% @ 600 - 1050nm

3. FINE GROUND SURFACE


4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. RoHS COMPLIANT

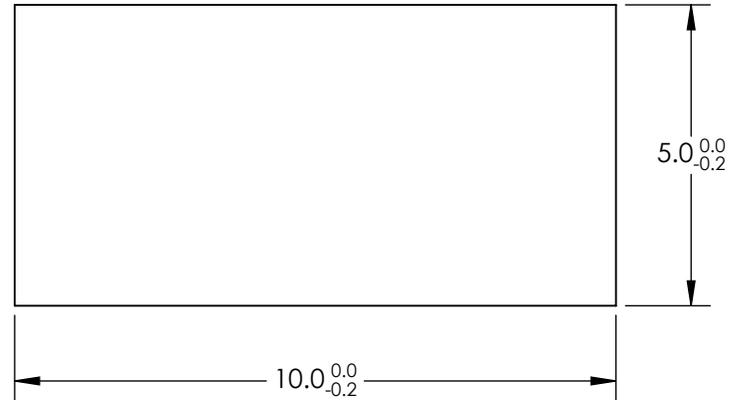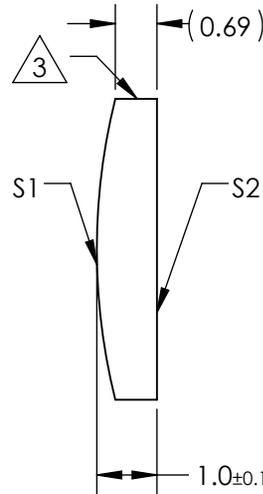

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	20	 <b>Edmund Optics®</b>		
SHAPE	CONVEX	PLANO	BFL	19.34			TITLE
RADIUS	10.32	∞	THIRD ANGLE PROJECTION 		DWG NO	69704	SHEET 1 OF 1
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	mm			
CLEAR APERTURE	9.00 X 4.00	9.00 X 4.00					
COATING APERTURE	9.00 X 4.00	9.00 X 4.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					