

NOTES:

1. SUBSTRATE MATERIAL:
N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)




S1 & S2: NIR I

R(avg) $\leq 0.5\%$ @ 600 - 1050nm

3. FINE GROUND SURFACE


4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. RoHS COMPLIANT

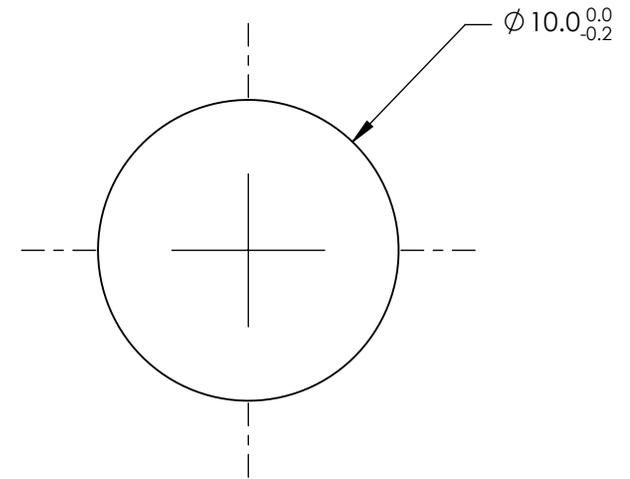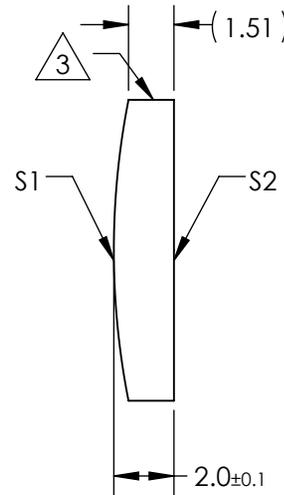

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	50	 Edmund Optics®		
SHAPE	CONVEX	PLANO	BFL	46.68			
RADIUS	25.84	∞			TITLE	10mm DIA X 50mm FL NIR I COATED, CYLINDER LENS	
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	mm	DWG NO	69709	SHEET 1 OF 1
CLEAR APERTURE	Ø9.00	Ø9.00					
COATING APERTURE	Ø9.00	Ø9.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					