## NOTES:

1. SUBSTRATE MATERIAL:

N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS-NIR

R(abs) ≤0.25% @ 880nm


R(avg) ≤1.25% @ 400 - 870nm


R(avg) ≤1.25% @ 890 - 1000nm

3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICAIONS APPLY ACROSS CLEAR APERTURE

5. Rohs Compliant

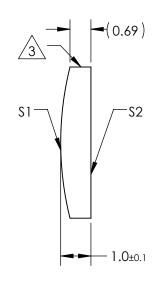

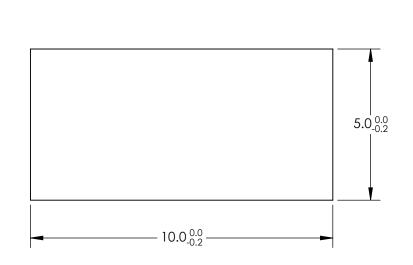

PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	\$1	S2					
SHAPE	CONVEX	PLANO	EFL	20		Edmund Ontice	<b>\</b> ∩®
RADIUS	10.32	8	BFL	19.34	Edmund Optics®		
SURFACE QUALITY	60-40	60-40	THIRD ANGLE PROJECTION		TITLE	5mm H X 10mm L X 20mm FL VIS-NIR COATED, CYLINDER LENS	
CLEAR APERTURE	9.00 X 4.00	9.00 X 4.00					
COATING APERTURE	9.00 X 4.00	9.00 X 4.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	47958	SHEET 1 OF 1