
## NOTES:


- 1. SUBSTRATE MATERIAL: ALUMINUM
- 2. FINISH (EXCEPT SURFACE S1): BLACK ANODIZED
- 3. COATING (APPLY ACROSS CLEAR APERTURE)
  S1: PROTECTED GOLD
  R(AVG) >94% @ 0.7-0.8µm
  R(AVG) >97% @ 0.8-2.0µm
  R(AVG) >98% @ 2-12µm


SURFACE ROUGHNESS: <100 Å RMS

- 4. FOCAL LENGTH TOLERANCE: ±1%
- 5. ROHS COMPLIANT



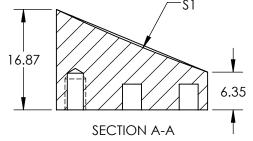

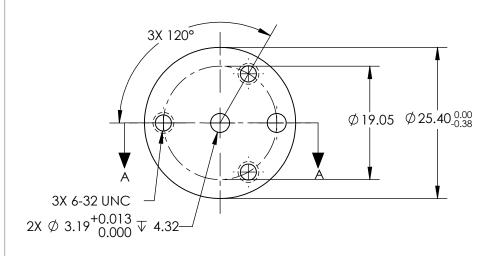

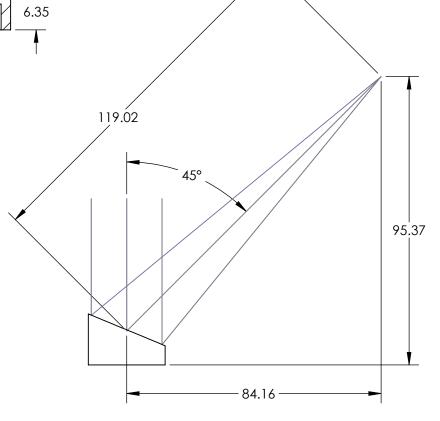

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	\$1	EFL	119.02		<b>D</b> <sup>®</sup> Edmund Ontice	<b>¬</b> ®
SHAPE	PARABOLIC	PFL	101.60		Edmund Optics	<b>&gt;</b> "
REFLECTIVE WAVEFRONT DISTORTION AT 632.8nm (RMS)	λ/2		1		Ø25.4 X 119.02mm EFL 45° OAP PROTECT	TED.
SURFACE FIGURE AT 632.8nm (RMS)	λ/4	THIRD ANGLE . PROJECTION	$\bigcirc$	TITLE	GOLD MIRROR 100Å	ILD
CLEAR APERTURE	90%		 			CLIEFT
BEVEL	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	35547	SHEET 1 OF 1