

NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. BLAZE ANGLE: 17° 27' NOMINAL BLAZE WAVELENGTH: 500nm EFFICIENCY: 60-80% @ BLAZE WAVELENGTH



5. Rohs Compliant



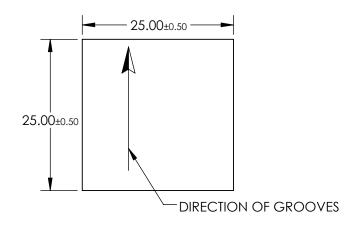



FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	Edmund	Optics®

				1	1	GRATING DIFF 1200GR 500nm 25 x 25	
	\$1	\$2	THIRD ANGLE PROJECTION		TITLE	CIV (111 VC Bir 1200 CK 0001 111 20 X 20	
SHAPE	PLANO	PLANO					CUEET
CLEAR APERTURE	22.5 x 22.5	22.5 x 22.5	ALL DIMS IN	mm	DWG NO	43005	SHEET 1 OF 1