

## NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. BLAZE ANGLE: 22° 01' NOMINAL BLAZE WAVELENGTH: 1250nm EFFICIENCY: 60-80% @ BLAZE WAVELENGTH



5. Rohs Compliant



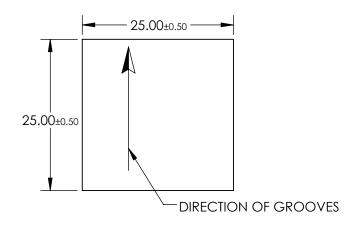



FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

<b>BO</b> ®	Edmund	Optics®
-------------	--------	---------

			1 1 .		1	GRATING DIFF 600GR 1250nm 25 x 25	
	\$1	\$2	THIRD ANGLE PROJECTION		TITLE	010 (111 (0 Dil 1 000 0 K 1200 111 120 X 20	
SHAPE	PLANO	PLANO					CHEET
CLEAR APERTURE	22.5 x 22.5	22.5 x 22.5	ALL DIMS IN	mm	DWG NO	43747	SHEET 1 OF 1