

## NOTES:

- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. BLAZE ANGLE: 26° 44' NOMINAL BLAZE WAVELENGTH: 750nm EFFICIENCY: 60-80% @ BLAZE WAVELENGTH



5. Rohs Compliant



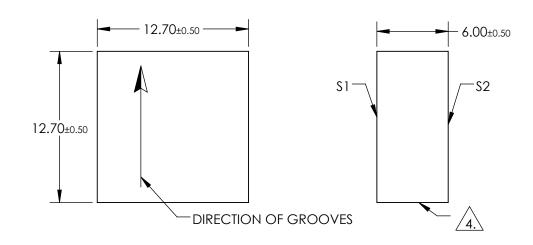

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

	\$1	\$2			
SHAPE	PLANO	PLANO			
CLEAR APERTURE	11.43 x 11.43	11.43 x 11.43			

**Edmund Optics®** 

THIRD ANGLE PROJECTION		TITLE	GRATING DIFF 1200GR 750nm 12.7 x 12.7	
	· ·			CLIEFT
ALL DIMS IN	mm	DWG NO	43752	SHEET 1 OF 1