
NOTES:

- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLY ACROSS CLEAR APERTURE): S1: BARE ALUMINUM S2: NONE
- 3. WAVELENGTH RANGE: 250-400nm ABSOLUTE DIFFRACTION EFFICIENCY: 45-65% GROOVE DENSITY: 2400 grooves/mm
- 4. EDGES GROUND
- 5. ROHS COMPLIANT

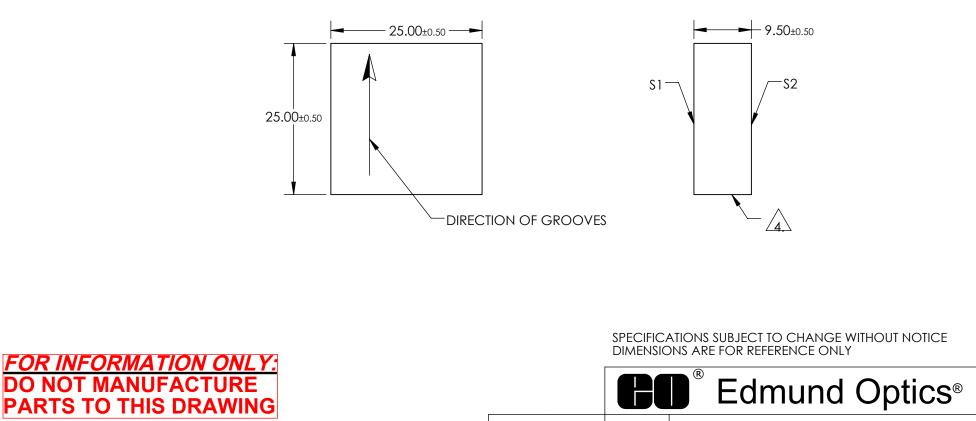

	S1	\$2			TITLE	GRATING HOLO 2400GR UV 25	IG HOLO 2400GR UV 25 X 25	
SHAPE	PLANO	PLANO						
CLEAR APERTURE	22.5 x 22.5	N/A	ALL DIMS IN	mm	DWG NO	48467	Sheet 1 Of 1	