NOTES:

- 1. SUBSTRATE: N-BK7
- 2. S2 TO BE PARALLEL WITH \$1 TO <1 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE)


\$1: VIS-EXT (350-700nm)


S2: VIS-EXT (350-700nm)

Ravg <0.5% @ 350 - 700nm



- 5. ROHS COMPLIANT
- 6. TRANSMITTED WAVEFRONT (P-V): $\lambda/4$ (per inch over clear aperture)

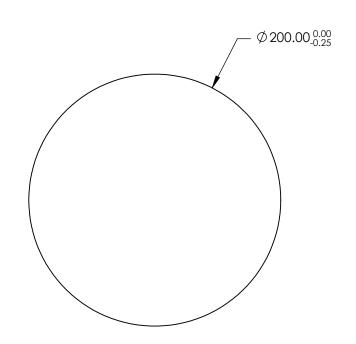

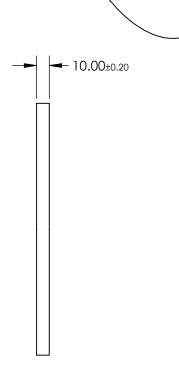

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	Ø 180.00	Ø 180.00
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

		Edmund Optics®	
D ANGLE JECTION	TITLE	200m Dia., 10mm Thick, VIS-EXT Coated $\lambda/4$ N-BK7 Window	

THIRD PROJ SHEET ALL DIMS IN mm DWG NO 59601 1 OF 4