


FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING



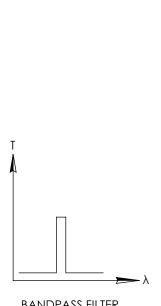

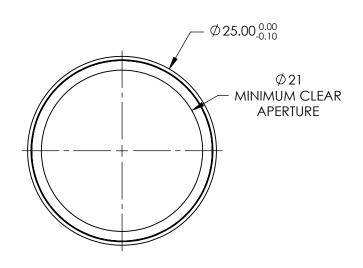

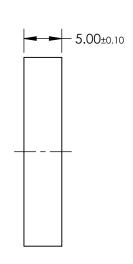

В	$^{\wedge}$	101	'А	55	ΗIL	.IER
---	-------------	-----	----	----	-----	------

REV. A	VALUE
CENTER WAVELENGTH (CWL)	785nm ±1nm
FULL WIDTH HALF MAX (FWHM)	5.0 ±1nm
MINIMUM TRANSMISSION	≥85%
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497a, SEC 3.4.1
ENVIRONMENTAL	MIL-STD-810F, SEC 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

GO ®	Edmund	Optics®
701	5 C\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	

3	THIRD ANGLE PROJECTION	ϕ	TITLE	785nm CWL, 25mm Dia., Hard Coated 5nm Bandpass Filter	OD4
	ALL DIMS IN	mm	DWG NO	39360	SHEET 1 OF 1