## NOTES:

SUBSTRATE:

Alumoscilate Glass Embedded with Silver Ions


2. COATING (APPLY ACROSS COATING APERTURE)


S1 & S2: Uncoated

3. EFL: 0.45

4. f/#:0.9 5. NUMERICAL APERTURE: 0.54
6. DESIGN WAVELENGTH: 670nm
7. WORKING DISTANCE: 0mm

8. ROHS: COMPLIANT



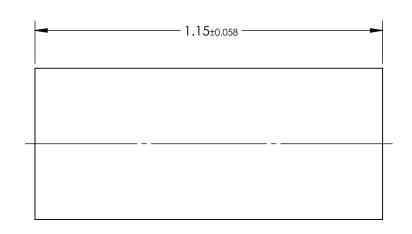

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

<b>Edmund</b> Op	otics®
------------------	--------

	\$1	\$2	THIRD ANGLE PROJECTION			0.5mm Dia, 670nm DWL, 0.0mm WD, Uncoated, GRIN Lens	
SHAPE	PLANO	PLANO			TITLE		
SURFACE QUALITY	40-20	40-20		I		01.000.000, 01 201.0	CUEET
CLEAR APERTURE	Ø0.45	Ø0.45	ALL DIMS IN	mm	DWG NO	64515	SHEET 1 OF 1