NOTES:


SUBSTRATE:


Alumoscilate Glass Embedded with Silver Ions

2. COATING (APPLY ACROSS COATING APERTURE)

\$1 & \$2: BBAR (780-840nm) R(AVG) < 0.5% @ 810nm ±30nm

- 3. EFL: 1.72 4. f/#: 0.96 5. NUMERICAL APERTURE: 0.52
- 6. DESIGN WAVELENGTH: 810nm
- 7. WORKING DISTANCE: 0.23mm
- 8. ROHS: COMPLIANT



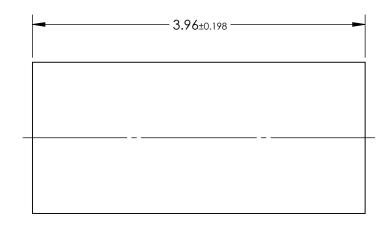

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	dmund C	Optics®
--	---------	---------

	\$1	\$2	THIRD ANGLE PROJECTION		TITLE	1.8mm Dia, 810nm DWL, 0.23mm WD, NIR Coated, GRIN Lens	
SHAPE	PLANO	PLANO					
SURFACE QUALITY	40-20	40-20		I			CUEET
CLEAR APERTURE	Ø1.62	Ø1.62	ALL DIMS IN	mm	DWG NO	64544	SHEET 1 OF 1