

NOTES:

1. SUBSTRATE: FLOAT GLASS
2. ROHS: COMPLIANT
3. COATING (APPLY ACROSS CLEAR APERTURE):

S1:



ABRASION: SEVERE, PER MIL-C-675C Paragraph 3.8.4.1

ADHESION: MIL-PRF-13830B, App B PARA. 4.4.6

R(AVG) >70% @ 400 - 700nm

R(AVG) >90% @ 2000 - 10000nm

S2: NONE

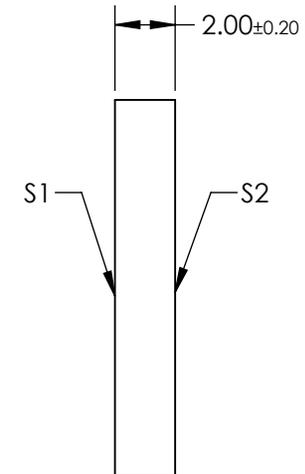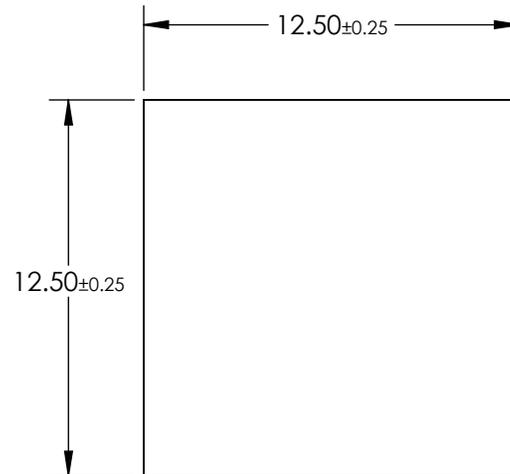

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	80 - 50	COMMERCIAL POLISH
CLEAR APERTURE	11.25 x 11.25	N/A
SURFACE FLATNESS	4 - 6λ	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED



ALL DIMS IN

mm

**EO**® **Edmund Optics**®

TITLE

MIRROR 4-6 WAVE RH 12.5 x 12.5MM

DWG NO

15488

SHEET  
1 OF 1