


NOTES:

1. SUBSTRATE: N-BK7
2. CENTERING TOLERANCE:
BEAM DEVIATION (HALF ANGLE): < 3 arcmin
3. COATING (APPLY ACROSS CLEAR APERTURE)


S1:NONE
S2:NONE

4. EDGES: FINE GROUND

5. ASPHERIC FIGURE ERROR: 0.75 μ m RMS

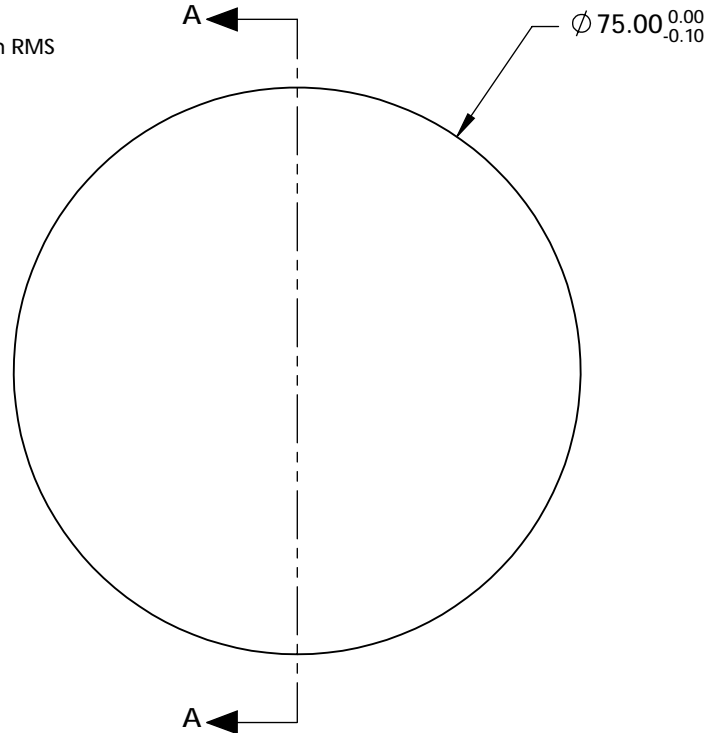



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

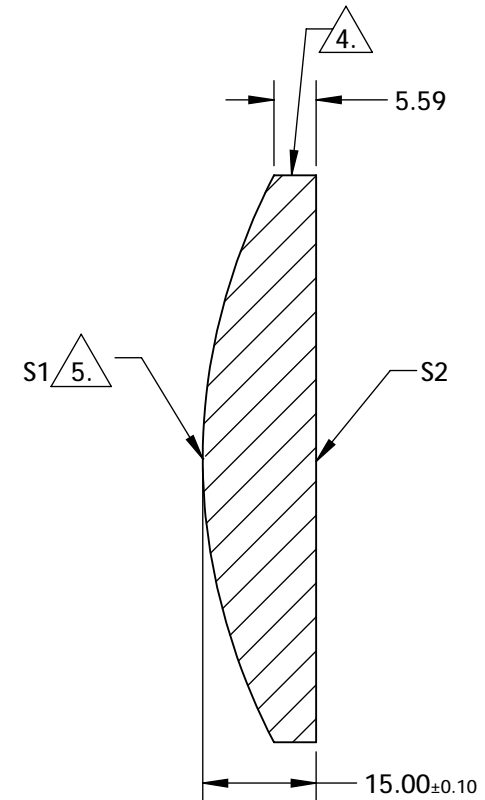

SECTION A-A

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

		EFL @ 780nm: 150.00		 Edmund Optics®		
SHAPE	S1 CONVEX	S2 PLANO				
SURFACE QUALITY	40-20	40-20		TITLE 75mm Dia., 0.25 NA, Uncoated, NIR Aspheric Lens		
CLEAR APERTURE (mm)	$\phi 69.00$	$\phi 69.00$				
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO 13509	SHEET 1 OF 1