
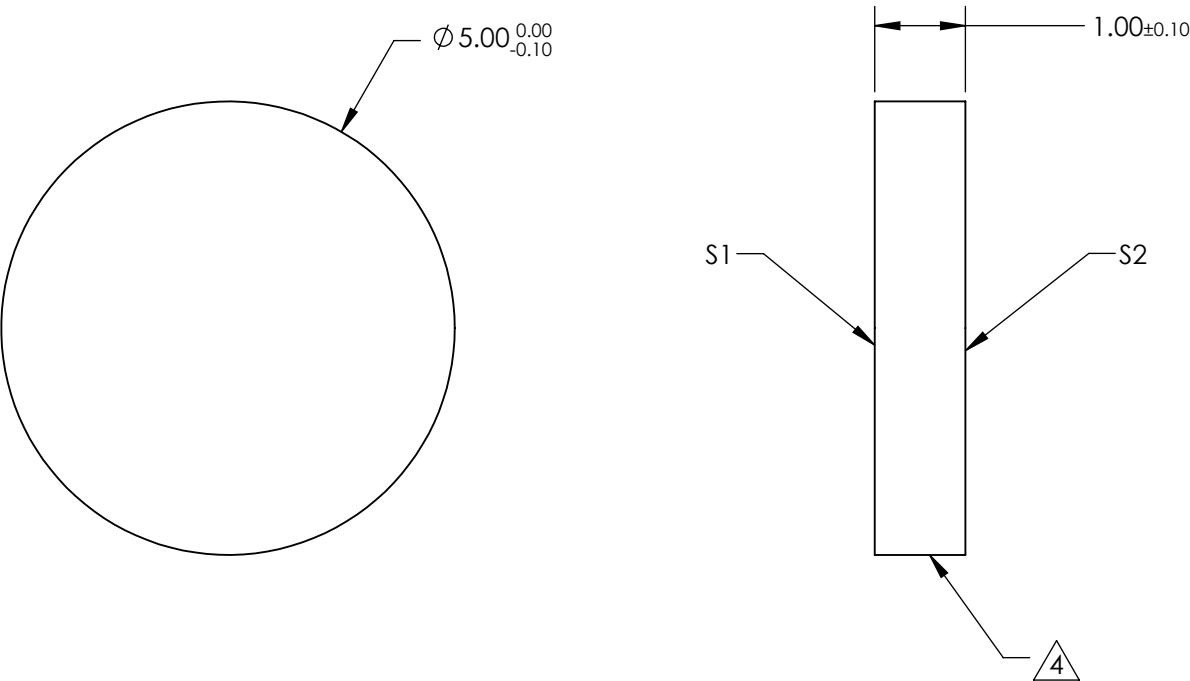




NOTES:

- 1. SUBSTRATE:  
Calcium Fluoride (CaF2) Vacuum UV Grade
- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO <1
- 3. COATING (APPLY ACROSS CLEAR APERTURE)  
S1 & S2: BBAR (2000-5000nm)
- 4. FINE GRIND SURFACE



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	 Edmund Optics®			
SHAPE	PLANO	PLANO	THIRD ANGLE PROJECTION 	TITLE	5mm Dia. x 1mm Thick, BBAR (2000-5000nm) Coated Calcium Fluoride Window	
SURFACE QUALITY	40-20	40-20				
CLEAR APERTURE	Ø 4.50	Ø 4.50	ALL DIMS IN	mm	DWG NO	23509
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED				SHEET 3 OF 28