
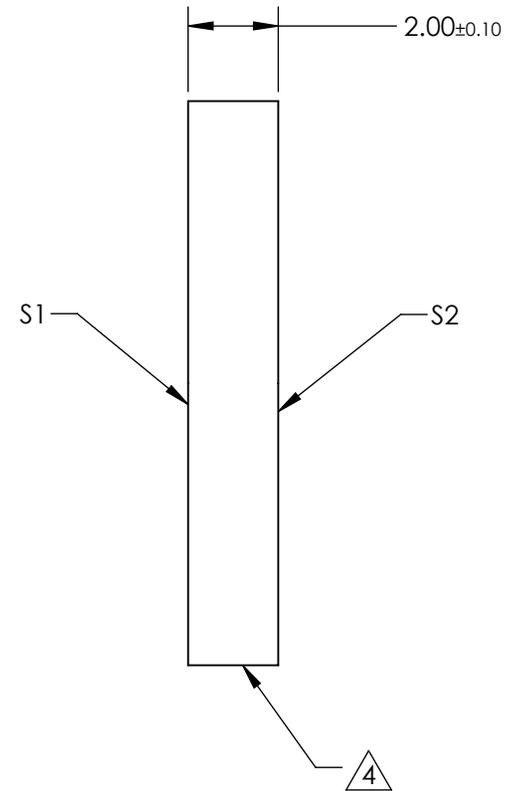
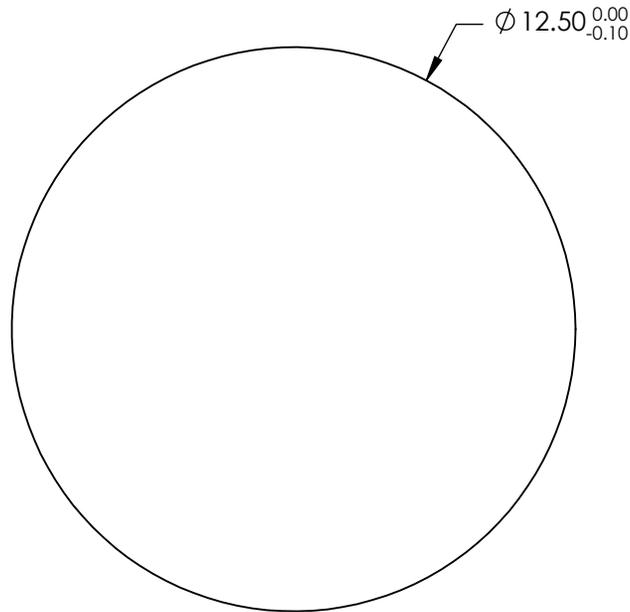


NOTES:

1. SUBSTRATE:
Calcium Fluoride (CaF₂) Vacuum UV Grade
2. SURFACE S2 TO BE PARALLEL WITH S1 TO <1
3. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: BBAR (2000-5000nm)
4. FINE GRIND SURFACE



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	Ø 11.25	Ø 11.25
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED



ALL DIMS IN mm

EO® Edmund Optics®

TITLE

12.5mm Dia. x 2mm Thick, BBAR (2000-5000nm) Coated Calcium Fluoride Window

DWG NO

23511

SHEET
5 OF 28