
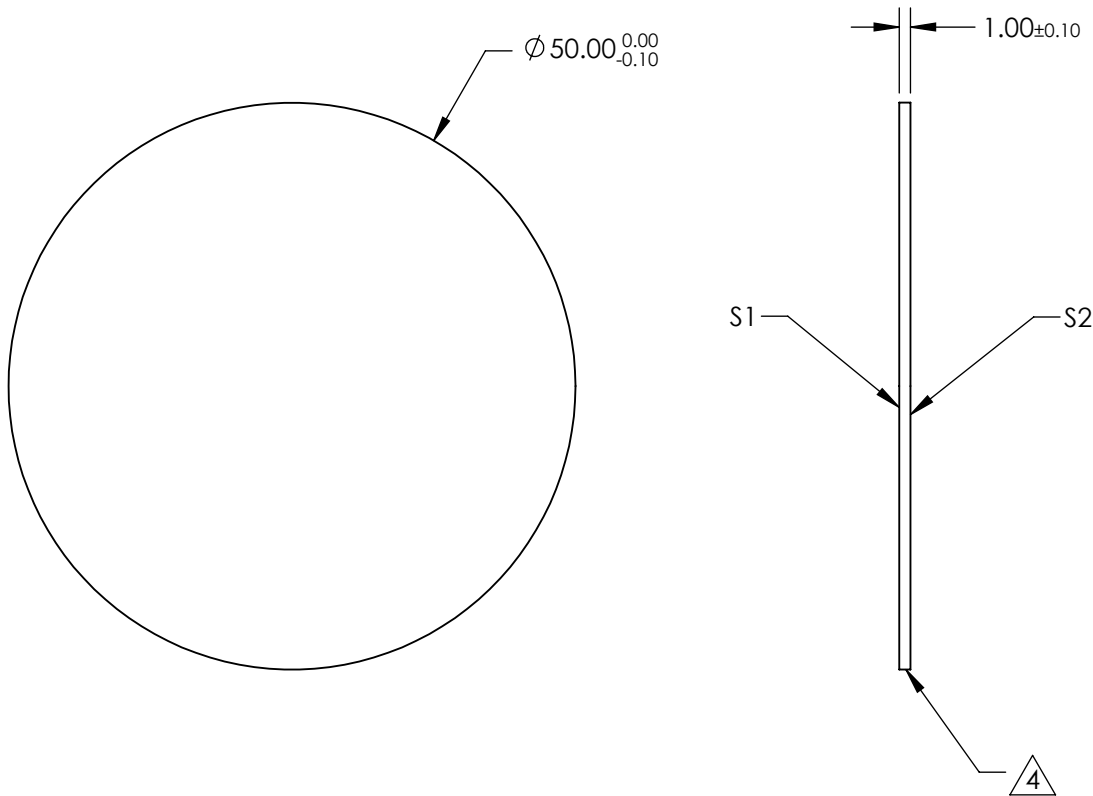




NOTES:

- 1. SUBSTRATE:
Calcium Fluoride (CaF2) Vacuum UV Grade
- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO <1
- 3. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: BBAR (2000-5000nm)
- 4. FINE GRIND SURFACE



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2			 Edmund Optics®	
SHAPE	PLANO	PLANO	<div>THIRD ANGLE PROJECTION</div> 	TITLE	50mm Dia. x 1mm Thick, BBAR (2000-5000nm) Coated Calcium Fluoride Window	
SURFACE QUALITY	40-20	40-20				
CLEAR APERTURE	Ø 45.00	Ø 45.00				
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	23522
						SHEET 16 OF 28