
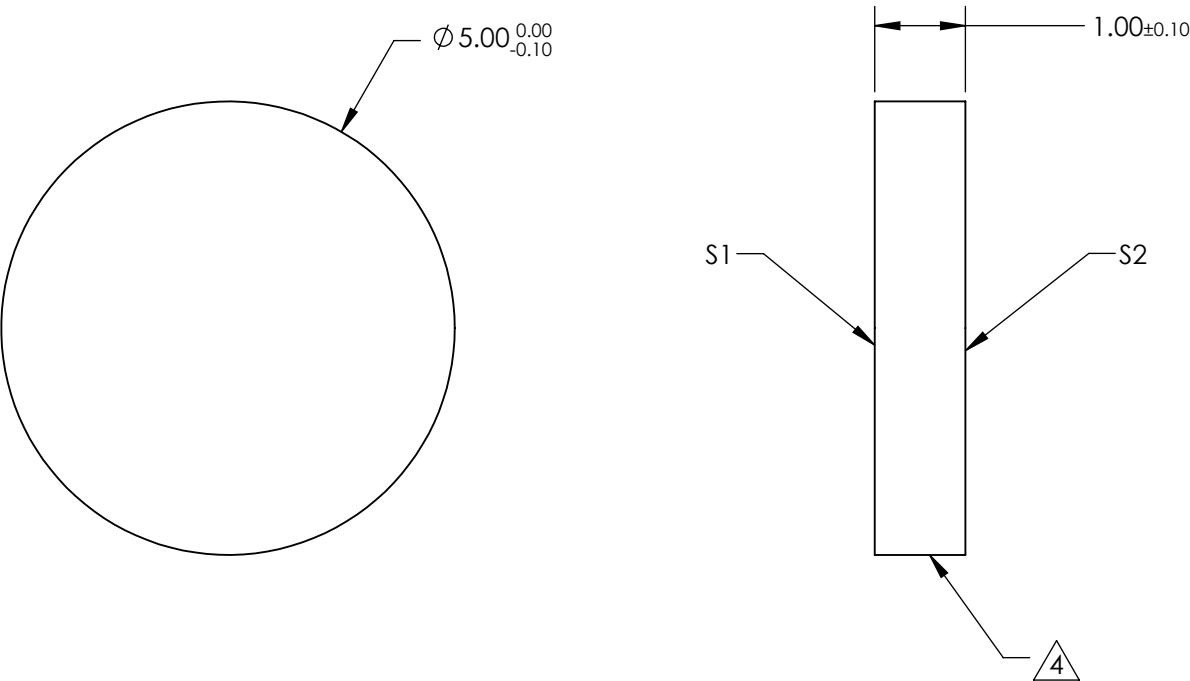


NOTES:



- 1. SUBSTRATE:  
Barium Fluoride (BaF2)
- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO <3
- 3. COATING (APPLY ACROSS CLEAR APERTURE)  
S1 & S2: BBAR (2000-5000nm)
- 4. FINE GRIND SURFACE



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	Ø 4.50	Ø 4.50
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

 Edmund Optics®			
THIRD ANGLE PROJECTION 		TITLE	5mm Dia. x 1mm Thick, BBAR (2000-5000nm) Coated Barium Fluoride Window
ALL DIMS IN	mm	DWG NO	23526
			SHEET 20 OF 28