
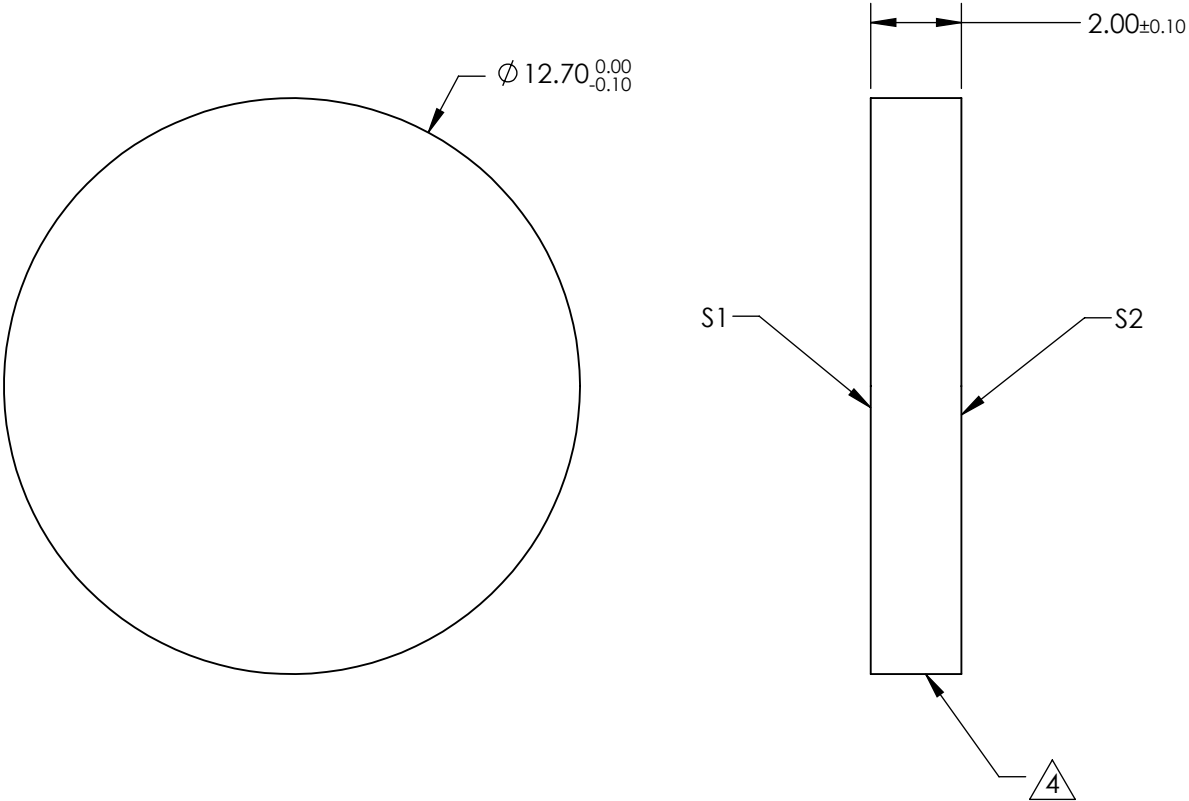


NOTES:


- 1. SUBSTRATE:
Barium Fluoride (BaF2)
- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO <3
- 3. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: BBAR (2000-5000nm)
- 4. FINE GRIND SURFACE




**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	$\varnothing 10.80$	$\varnothing 10.80$
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

**Edmund Optics®**

THIRD ANGLE
PROJECTION



ALL DIMS INmm

TITLE

12.7mm Dia. x 2mm Thick, BBAR (2000-5000nm) Coated Barium Fluoride Window

DWG NO

23528

SHEET
22 OF 28