
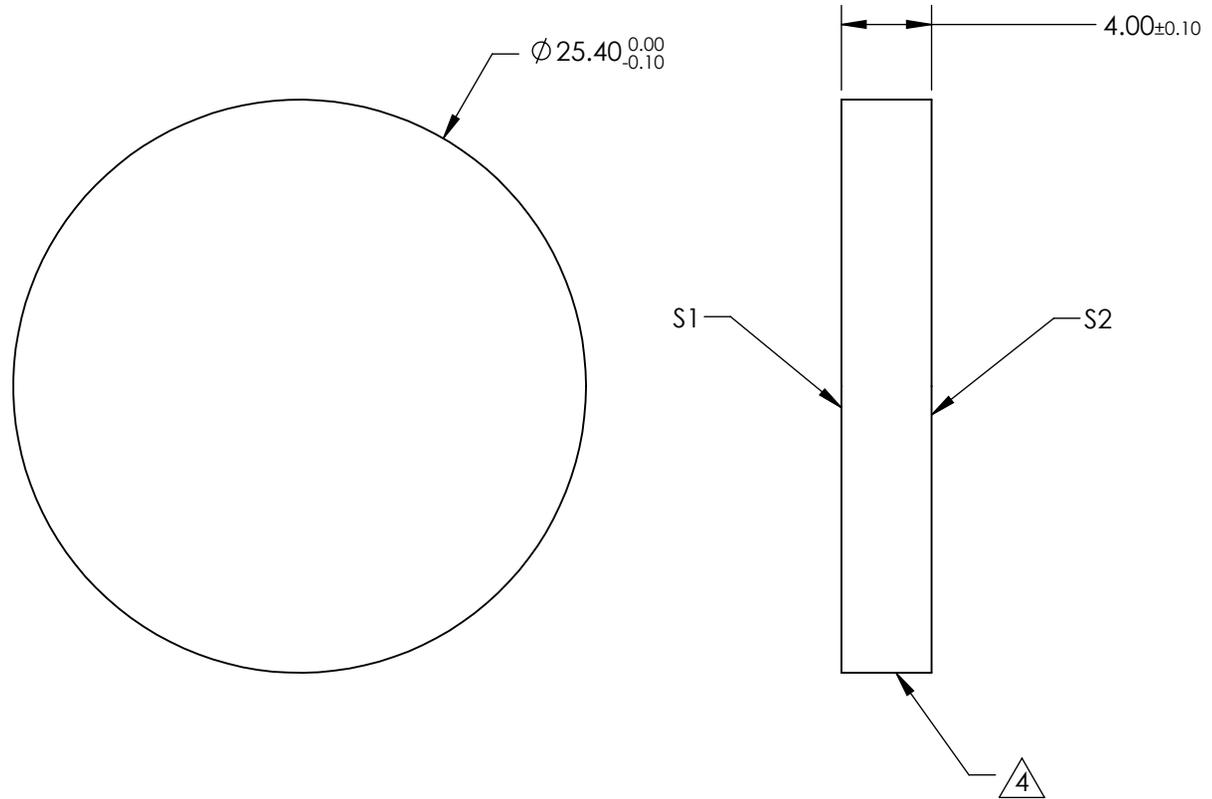


NOTES:

1. SUBSTRATE:  
Barium Fluoride (BaF2)
2. SURFACE S2 TO BE PARALLEL WITH S1 TO
3. COATING (APPLY ACROSS CLEAR APERTURE)  
S1 & S2: BBAR (2000-5000nm)
4. FINE GRIND SURFACE



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

|                 | S1                  | S2                  |
|-----------------|---------------------|---------------------|
| SHAPE           | PLANO               | PLANO               |
| SURFACE QUALITY | 60-40               | 60-40               |
| CLEAR APERTURE  | $\varnothing 21.59$ | $\varnothing 21.59$ |
| BEVEL           | PROTECTED AS NEEDED | PROTECTED AS NEEDED |



ALL DIMS IN

mm

**EO**® **Edmund Optics**®

25.4mm Dia., 4mm Thick, 30° Wedge, BBAR  
(2000-5000nm) Coated, Barium Fluoride  
(BaF2) Wedged Window

TITLE

DWG NO

23719

SHEET  
27 OF 28