NOTES:

1. SUBSTRATE:


Fused Silica (or equivalent)

- 2. CENTERING TOLERANCE (AT 587.6nm): <1 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

S1&S2: NONE



- 5. FOCAL LENGTH (EFL): 25mm
 BACK FOCAL LENGTH (BFL): 22.79mm
- 6. ROHS COMPLIANT
- 7. PROTECTIVE BEVEL AS NEEDED
- 8. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 9. DESIGN WAVELENGTH: 587.6nm

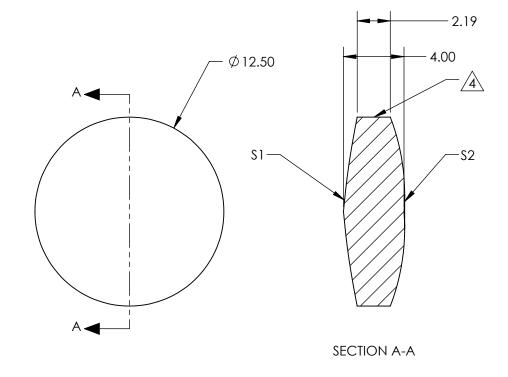

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2
SHAPE	PLANO	PLANO
RADIUS	54.52	14.18
SURFACE QUALITY	10-5	10-5
CLEAR APERTURE	Ø11.25	Ø11.25
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

		Edmund Optics ®			S®
THIRD ANGLE PROJECTION		TITLE	LENS DCX BF 12.5 X 25 UNCTD TS		
)	ALL DIMS IN	mm	DWG NO	22564	SHEET 2 OF 8