## NOTES:

1. ALLOWABLE OPTICAL MATERIAL: FUSED SILICA CORNING 7980


2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN

3. COATING (APPLY ACROSS ENTIRE SURFACE) S1&S2: VIS-NIR (400-1000nm)

> Rabs ≤0.25% @ 880nm Ravg ≤1.25% @ 400 - 870nm Ravg ≤1.25% @ 890 - 1000nm

## 4. SIX SIDEWALLS:

SURFACE ACCURACY: COMMERCIAL POLISH

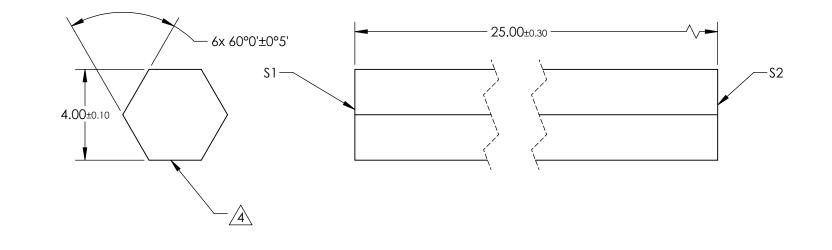

## *FOR INFORMATION ONLY:* DO NOT MANUFACTURE PARTS TO THIS DRAWING

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY



	S1	S2			TITLE	4mm Aperture x 25mm L, VIS-NIR Coated, High NA, Fused Silica Light Pipe	
SHAPE	PLANO	PLANO					
IRREGULARITY AT 632.8nm	N/A	N/A					
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	mm	DWG NO	23493	SHEET 4 OF 18