


NOTES:

1. ALLOWABLE OPTICAL MATERIAL:
FUSED SILICA CORNING 7980


2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN

3. COATING (APPLY ACROSS ENTIRE SURFACE)
S1&S2: VIS-NIR (400-1000nm)

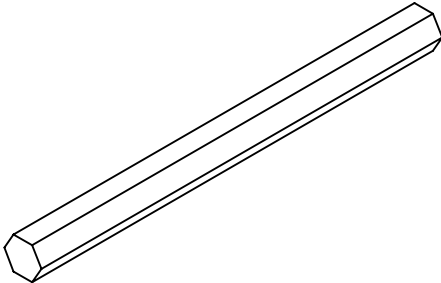

Rabs $\leq 0.25\%$ @ 880nm
Ravg $\leq 1.25\%$ @ 400 - 870nm
Ravg $\leq 1.25\%$ @ 890 - 1000nm

4. SIX SIDEWALLS:
SURFACE ACCURACY: COMMERCIAL POLISH

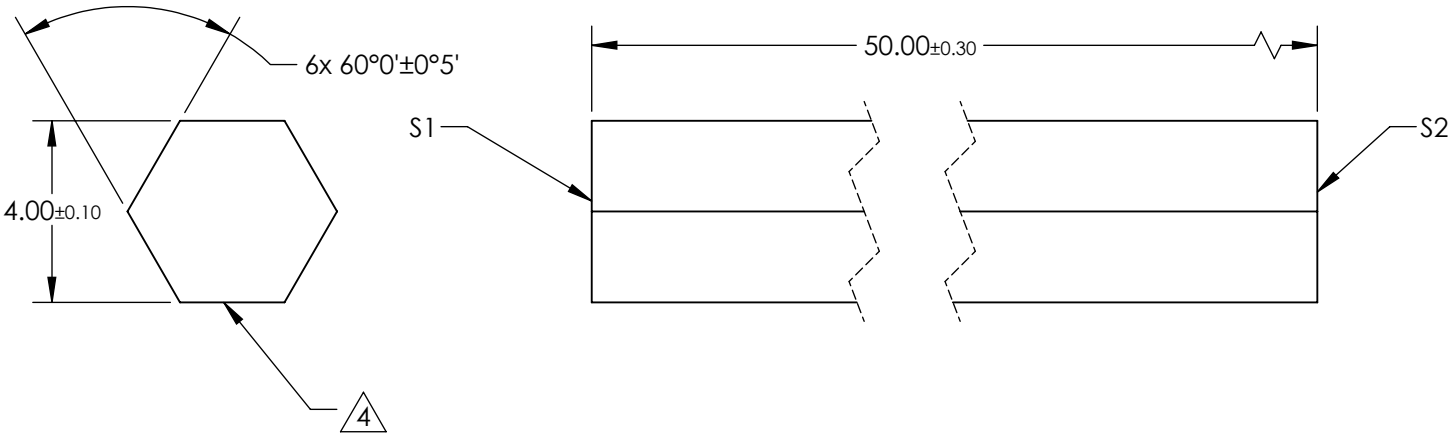

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

Edmund Optics®

| | S1 | S2 | THIRD ANGLE PROJECTION | | TITLE | 4mm Aperture x 50mm L, VIS-NIR Coated, Standard NA, Fused Silica Light Pipe | |
|-------------------------|-------|-------|------------------------|----|--------|--|------------------|
| SHAPE | PLANO | PLANO | ALL DIMS IN | mm | DWG NO | 23494 | SHEET 5 OF 18 |
| IRREGULARITY AT 632.8nm | N/A | N/A | | | | | |
| SURFACE QUALITY | 60-40 | 60-40 | | | | | |