## NOTES:


- 1. ALLOWABLE OPTICAL MATERIAL: FUSED SILICA CORNING 7980
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN
- 3. COATING (APPLY ACROSS ENTIRE SURFACE) \$1&\$2: VIS-NIR (400-1000nm)

Rabs ≤0.25% @ 880nm Ravg ≤1.25% @ 400 - 870nm Ravg ≤1.25% @ 890 - 1000nm



SIX SIDEWALLS:

SURFACE ACCURACY: COMMERCIAL POLISH

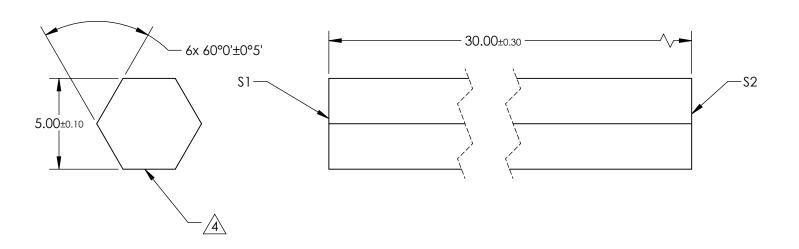

## PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

DIMENSIONS ARE FOR REF	ERENCE ONLT		
	\$1	\$2	
SHAPE	PLANO	PLANO	TI P
IRREGULARITY AT 632.8nm	N/A	N/A	
SURFACE QUALITY	60-40	60-40	,



## **E** Edmund Optics®

			-				
	\$1	\$2	THIRD ANGLE PROJECTION		TITLE	5mm Aperture x 30mm L, VIS-NIR Coated, High NA, Fused Silica Light Pipe	
SHAPE	PLANO	PLANO					
IRREGULARITY AT 632.8nm	N/A	N/A					
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	mm	DWG NO	23496	SHEET 7 OF 18