## NOTES:


- 1. ALLOWABLE OPTICAL MATERIAL: **FUSED SILICA CORNING 7980**
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN
- 3. COATING (APPLY ACROSS ENTIRE SURFACE) \$1&\$2: VIS-NIR (400-1000nm)

Rabs ≤0.25% @ 880nm Ravg ≤1.25% @ 400 - 870nm Ravg ≤1.25% @ 890 - 1000nm



SIX SIDEWALLS:

SURFACE ACCURACY: COMMERCIAL POLISH

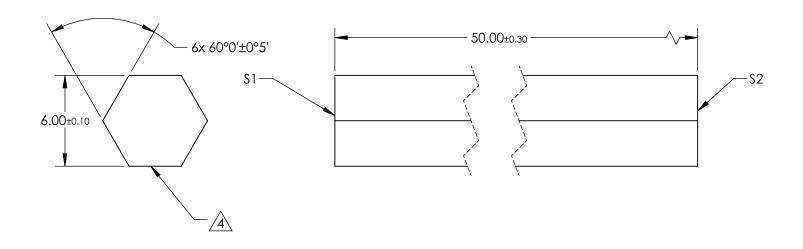

## 'S TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

DIMENSIONS ARE FOR REFERENCE ONE!				
	\$1	\$2		
SHAPE	PLANO	PLANO	THIRD ANGLE _ PROJECTION	
IRREGULARITY AT 632.8nm	N/A	N/A	<u> </u>	
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	

## Edmund Optics®

10 OF 18

		TITLE	6mm Aperture x 50mm L, VIS-NIR Coated High NA, Fused Silica Light Pipe	
	mm	DWG NO	00.400	SHEET

23499

DWG NO