


NOTES:

1. ALLOWABLE OPTICAL MATERIAL:
FUSED SILICA CORNING 7980


2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN

3. COATING (APPLY ACROSS ENTIRE SURFACE)
S1&S2: VIS-NIR (400-1000nm)

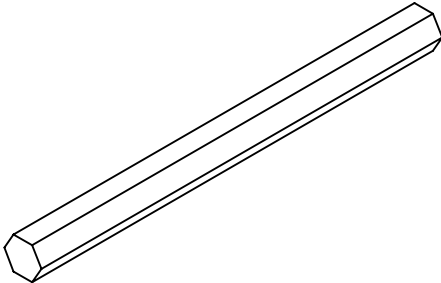

Rabs $\leq 0.25\%$ @ 880nm
Ravg $\leq 1.25\%$ @ 400 - 870nm
Ravg $\leq 1.25\%$ @ 890 - 1000nm


4. SIX SIDEWALLS:
SURFACE ACCURACY: COMMERCIAL POLISH

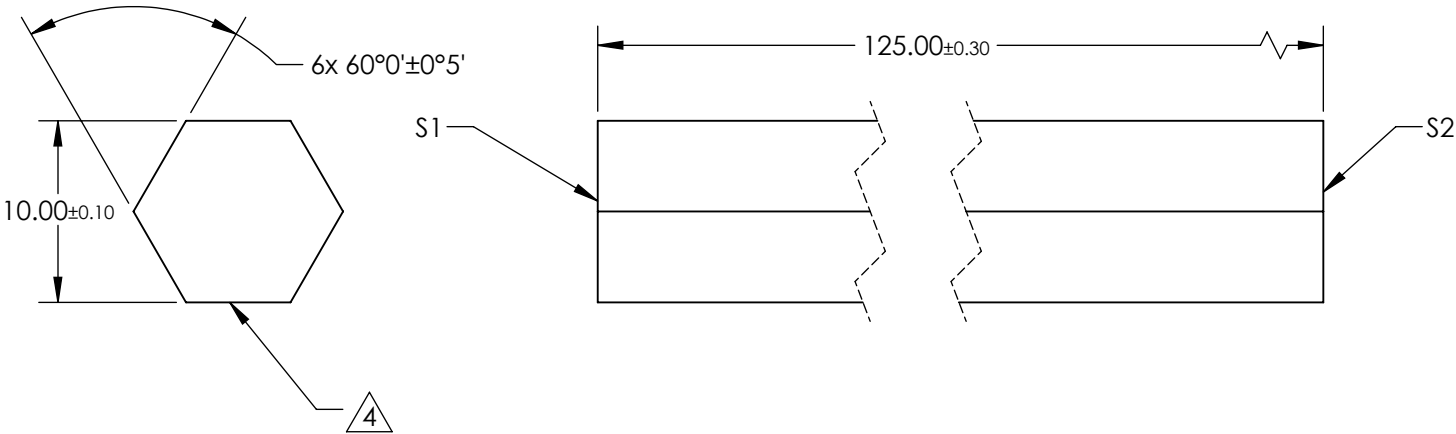

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

Edmund Optics®

	S1	S2	<div>THIRD ANGLE PROJECTION</div> 		TITLE 10mm Aperture x 125mm L, VIS-NIR Coated, Standard NA, Fused Silica Light Pipe	
SHAPE	PLANO	PLANO				
IRREGULARITY AT 632.8nm	N/A	N/A	ALL DIMS IN		mm	DWG NO 23506
SURFACE QUALITY	60-40	60-40				SHEET 17 OF 18