


# LightPath 355485 | 1 x 1mm, 0.50 NA, BBAR (1050-1600nm), Molded Aspheric Lens

See More by [Lightpath®](#)

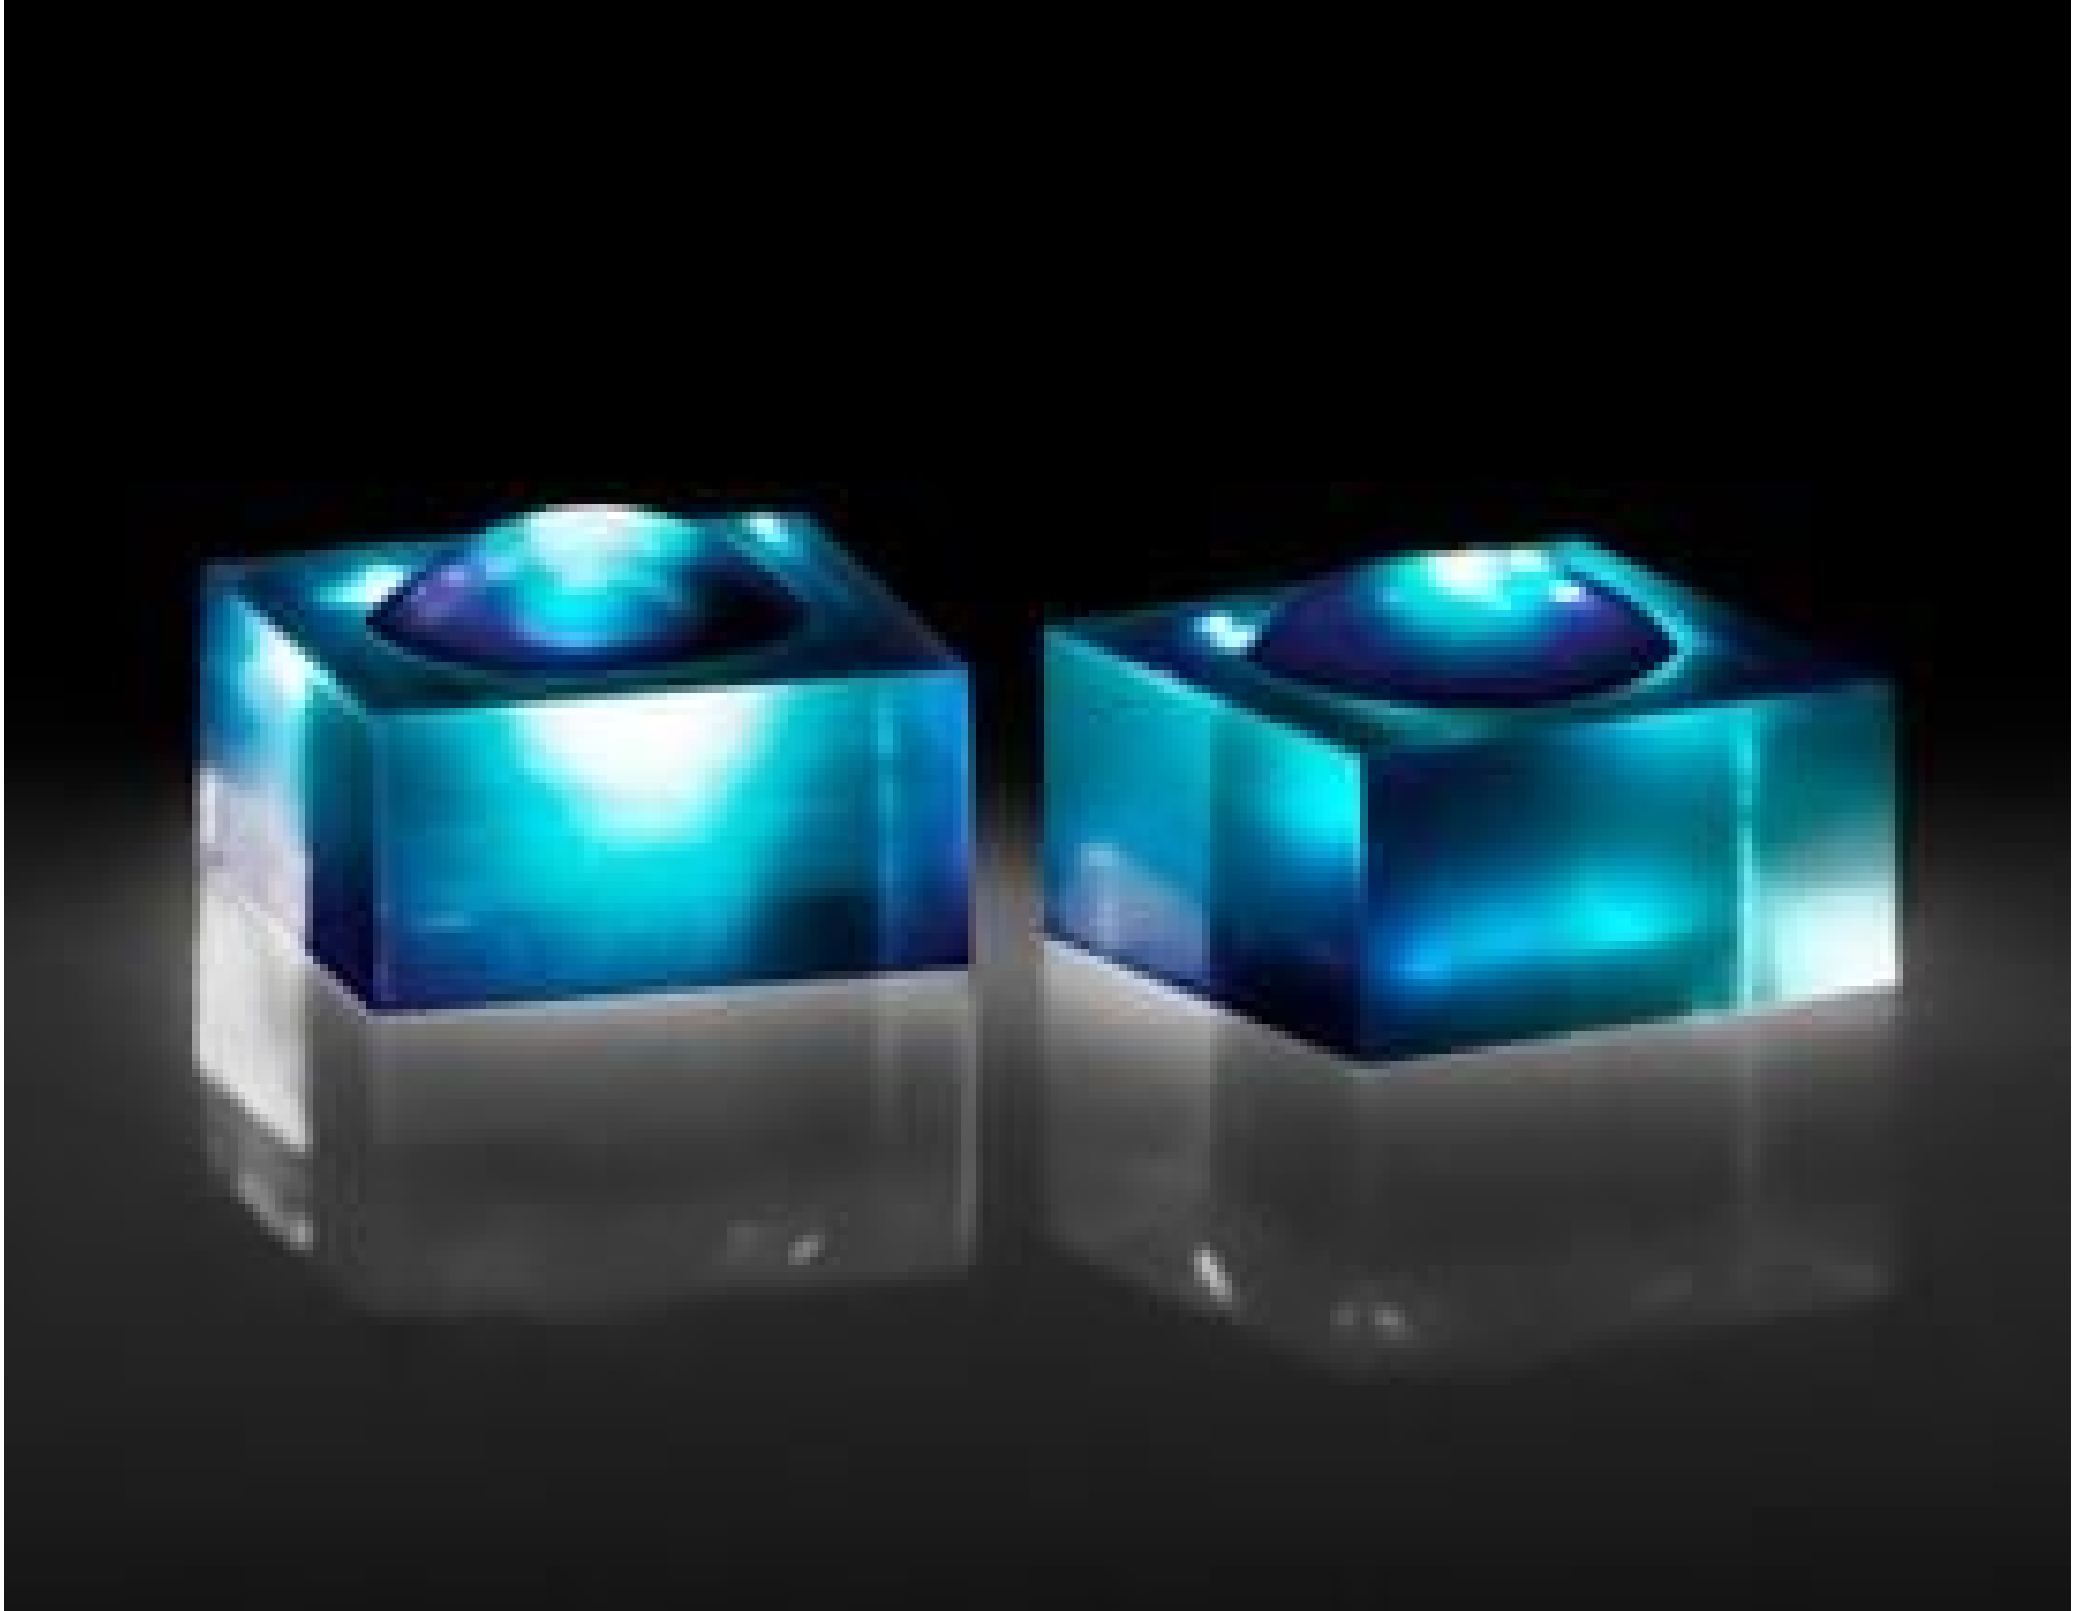

Stock #37-114 **20+ In Stock**

€89.<sup>00</sup>

**ADD TO CART**

Volume Pricing	
Qty 1-10	€89,00 each
Qty 11-49	€80,00 each
Need More?	<a href="#">Request Quote</a>

ⓘ Prices shown are exclusive of VAT/local taxes

## Product Downloads

### General

355485 **Lightpath Lens Code:**

Aspheric Lens **Type:**

Finite Conjugate for Magnification **Typical Applications:**

NA Image (mm): 0.10 **Note:**

WD, Image (mm): 3.03  
WD, Object (mm): 0.3

## Physical & Mechanical Properties

1.0 x 1.0 ±0.015	<b>Dimensions (mm):</b>
0.35	<b>Clear Aperture CA (mm):</b>
0.51	<b>Edge Thickness ET (mm):</b>
0.66 ±0.05	<b>Center Thickness CT (mm):</b>
Protective as needed	<b>Bevel:</b>

## Optical Properties

0.55 @ 1550nm	<b>Effective Focal Length EFL (mm):</b>
0.50	<b>Numerical Aperture NA:</b>
<a href="#">D-ZLaF52LA</a>	<b>Substrate:</b> <input type="checkbox"/>
±1	<b>Focal Length Tolerance (%):</b>
1550	<b>Aspheric Design Wavelength (nm):</b>
BBAR (1050-1600nm)	<b>Coating:</b>
R <sub>abs</sub> <1.0% @ 1050 - 1600nm	<b>Coating Specification:</b>
40-20	<b>Surface Quality:</b>
1.00	<b>f/#:</b>
40.79	<b>Abbe Number (v<sub>d</sub>):</b>
1.806	<b>Index of Refraction (n<sub>d</sub>):</b>
1050 - 1600	<b>Wavelength Range (nm):</b>
0.3	<b>Working Distance (mm):</b>
Finite	<b>Conjugate Distance:</b>
1550.00	<b>Focal Length Specification Wavelength (nm):</b>
<0.04	<b>Transmitted Wavefront Error (λ, RMS):</b>

## Material Properties

6.9	<b>Coefficient of Thermal Expansion CTE (10<sup>-6</sup>/°C):</b>
-----	---

## Environmental & Durability Factors

≤200	<b>Operating Temperature (°C):</b>
------	------------------------------------

## Regulatory Compliance

<a href="#">Compliant</a>	<b>RoHS 2015:</b>
<a href="#">View</a>	<b>Certificate of Conformance:</b>
<a href="#">Compliant</a>	<b>Reach 247:</b>

## Product Details

- Eliminate Spherical Aberration
- Multiple Coating Options Available
- Range of Numerical Apertures

LightPath® Geltech™ Molded Aspheric Lenses are used to eliminate spherical aberration and improve focusing and collimating accuracy in a variety of laser applications. Low NA aspheric lenses are designed to maintain beam shape, while high NA lenses gather all available light to maintain beam power over long distances. LightPath® Geltech™ Molded Aspheric Lenses are ideal for applications including sighting systems, bar code scanners, laser diode-to-fiber coupling, optical data storage, or biomedical lasers.

## Technical Information

