See all 75 Products in Family

LightPath 355561 | 15mm Dia., 0.60 NA, BBAR (600-1050nm), Molded Aspheric Lens

See More by Lightpath®

Precision Molded Aspheric Lenses

Stock **#37-106** CONTACT US

Other Coating Options

- 1 + **€85**.00

ADD TO CART

Volume Pricing	
Qty 1-10	**€85,00** each
Qty 11-49	**€76,50** each
Need More?	Request Quote

Prices shown are exclusive of VAT/local taxes

Product Downloads

General

Lightpath Lens Code:
355561

Type:
Aspheric Lens

Typical Applications:
Collimate or Focus Laser Light

Physical & Mechanical Properties

Diameter (mm):
15.00 ±0.015

Clear Aperture CA (mm):
12.5

Edge Thickness ET (mm):
2.56

Center Thickness CT (mm):
5.38 ±0.05

Bevel:
Protective as needed

Optical Properties

Effective Focal Length EFL (mm):
10.00 @ 850nm

Numerical Aperture NA:
0.60

Substrate:
D-ZLaF52LA

Focal Length Tolerance (%):
±1

Aspheric Design Wavelength (nm):
850

Coating:
BBAR (600-1050nm)

Coating Specification:
R_{abs} <1.0% @ 600 - 1050nm

Surface Quality:
60-40

f/#:
0.83

Abbe Number (v_d):
40.79

Index of Refraction (n_d):
1.806

Wavelength Range (nm):
600 - 1050

Working Distance (mm):
7

Conjugate Distance:
Infinite

Focal Length Specification Wavelength (nm):
850.00

Transmitted Wavefront Error (λ, RMS):
< 0.40

Material Properties

Coefficient of Thermal Expansion CTE (10^{-6}/°C):
6.9

Environmental & Durability Factors

Operating Temperature (°C):
≤200

Regulatory Compliance

RoHS 2015:
Compliant

Certificate of Conformance:
View

Reach 247:
Compliant

Product Details

- Eliminate Spherical Aberration
- Multiple Coating Options Available
- Range of Numerical Apertures

LightPath® Geltech™ Molded Aspheric Lenses are used to eliminate spherical aberration and improve focusing and collimating accuracy in a variety of laser applications. Low NA aspheric lenses are designed to maintain beam shape, while high NA lenses gather all available light to maintain beam power over long distances. LightPath® Geltech™ Molded Aspheric Lenses are ideal for applications including sighting systems, bar code scanners, laser diode-to-fiber coupling, optical data storage, or biomedical lasers.

Technical Information

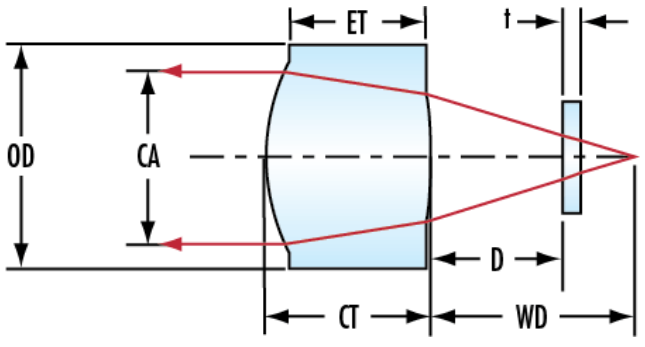

Compatible Mounts

;