

TECHSPEC<sup>®</sup> 18.0mm Dia. x 18.0mm FL, MgF<sub>2</sub> Coated, Plano-Convex Lens



Stock **#45-438** CLEARANCE **20+ In Stock**

-

1

+

€24<sup>50</sup>

ADD TO CART

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1+         | €24,50 each                   |
| Need More?     | <a href="#">Request Quote</a> |

Prices shown are exclusive of VAT/local taxes

Product Downloads

| General                          |                     |
|----------------------------------|---------------------|
| Plano-Convex Lens                | Type:               |
| Physical & Mechanical Properties |                     |
| 18.00 +0.0/-0.025                | Diameter (mm):      |
| <1                               | Centering (arcmin): |

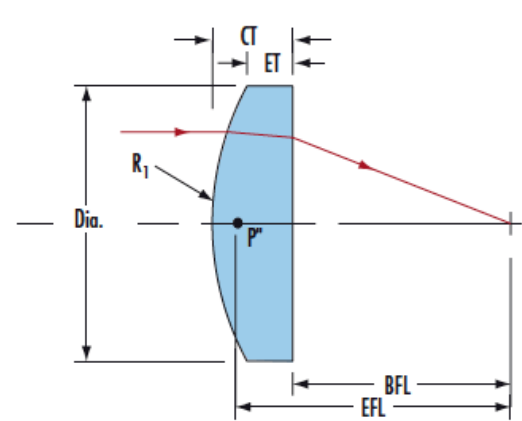
|                                       |                                                       |
|---------------------------------------|-------------------------------------------------------|
| 10.33 ±0.10                           | Center Thickness CT (mm):                             |
| 3.47                                  | Edge Thickness ET (mm):                               |
| 17                                    | Clear Aperture CA (mm):                               |
| Protective as needed                  | Bevel:                                                |
| Optical Properties                    |                                                       |
| 18.00 @ 587.6nm                       | Effective Focal Length EFL (mm):                      |
| 11.20                                 | Back Focal Length BFL (mm):                           |
| MgF <sub>2</sub> (400-700nm)          | Coating:                                              |
| R <sub>avg</sub> ≤1.75% @ 400 - 700nm | Coating Specification:                                |
| N-BK7                                 | Substrate: <input type="checkbox"/>                   |
| 40-20                                 | Surface Quality:                                      |
| 1.5λ                                  | Power (P-V) @ 632.8nm:                                |
| λ/4                                   | Irregularity (P-V) @ 632.8nm:                         |
| ±1                                    | Focal Length Tolerance (%):                           |
| 9.33                                  | Radius R <sub>1</sub> (mm):                           |
| 1                                     | f/#:                                                  |
| 0.50                                  | Numerical Aperture NA:                                |
| 400 - 700                             | Wavelength Range (nm):                                |
| 10 J/cm <sup>2</sup> @ 532nm, 10ns    | Damage Threshold, Reference: <input type="checkbox"/> |
| Regulatory Compliance                 |                                                       |
| View                                  | Certificate of Conformance:                           |

## Product Details

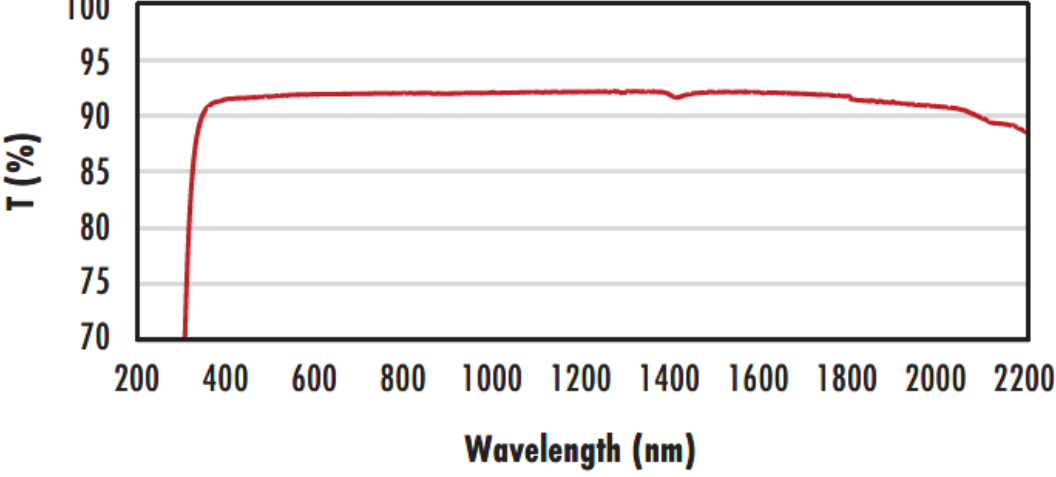
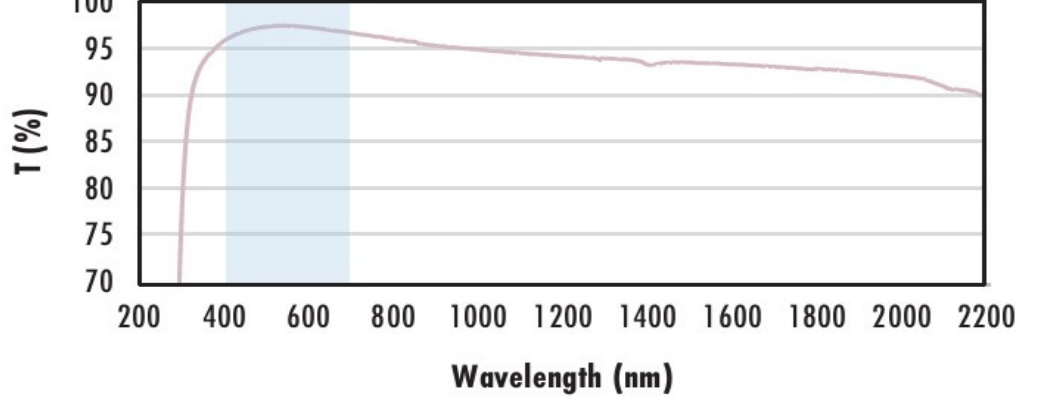
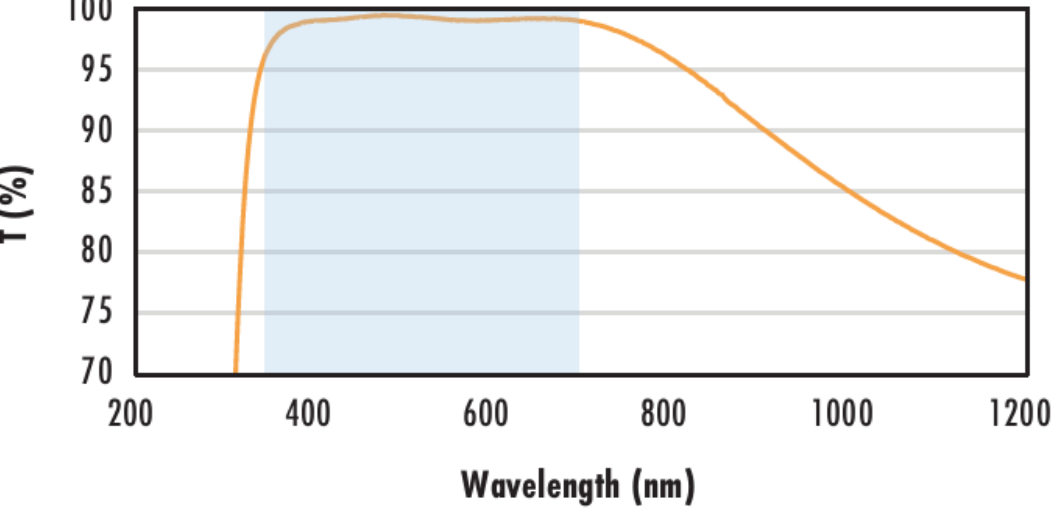
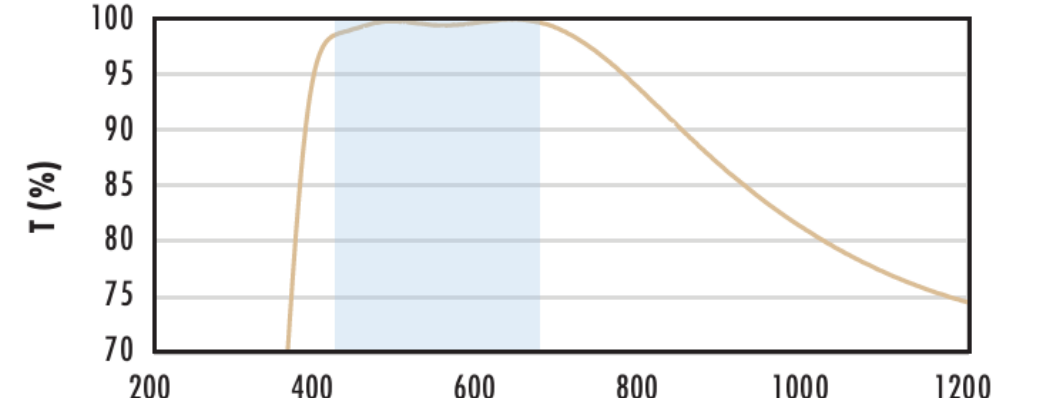
- AR Coated to Provide <1.75% Reflectance per Surface for 400 - 700nm
- Designed for 0° Angle of Incidence
- Various PCX Coating Options: [Uncoated](#), [VIS 0°](#), [VIS-NIR](#), [NIR I](#), [NIR II](#), [VIS-EXT](#), and [YAG-BBAR](#)
- Also Available [Pre-Mounted in Engraved C-Mount Housings](#)

TECHSPEC® MgF2 Coated Plano-Convex (PCX) Lenses have a positive focal length, making them ideal for collecting and focusing light in imaging applications. They are also useful in a variety of applications involving emitters, detectors, lasers, and fiber optics. TECHSPEC® MgF2 Coated Plano-Convex (PCX) Lenses are available in a wide variety of diameters and focal lengths. Identical designs of these PCX lenses are also offered [uncoated](#) or with broadband anti-reflective (BBAR) coatings, which include [VIS 0°](#), [VIS-NIR](#), [NIR I](#), [NIR II](#), [VIS-EXT](#), and [YAG-BBAR](#).

## Technical Information



|                                     |  |
|-------------------------------------|--|
| N-BK7                               |  |
| Uncoated N-BK7 Typical Transmission |  |

|                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>Uncoated N-BK7 Typical Transmission</b></p>                       | <p>Typical transmission of a 3mm thick, uncoated N-BK7 window across the UV - NIR spectra.</p> <p><a href="#">Click Here to Download Data</a></p>                                                                                                                                                                                                                                                                                                                                                                              |
| <p><b>N-BK7 with MgF<sub>2</sub> Coating Typical Transmission</b></p>  | <p>Typical transmission of a 3mm thick N-BK7 window with MgF<sub>2</sub> (400-700nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{avg} \leq 1.75\% @ 400 - 700\text{nm}</math> (N-BK7)</p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>                                                                                                 |
| <p><b>N-BK7 with VIS-EXT Coating Typical Transmission</b></p>         | <p>Typical transmission of a 3mm thick N-BK7 window with VIS-EXT (350-700nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{avg} \leq 0.5\% @ 350 - 700\text{nm}</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>                                                                                                                  |
| <p><b>N-BK7 with VIS-NIR Coating Typical Transmission</b></p>         | <p>Typical transmission of a 3mm thick N-BK7 window with VIS-NIR (400-1000nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{abs} \leq 0.25\% @ 880\text{nm}</math><br/><math>R_{avg} \leq 1.25\% @ 400 - 870\text{nm}</math><br/><math>R_{avg} \leq 1.25\% @ 890 - 1000\text{nm}</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p> |
| <p><b>N-BK7 with VIS 0° Coating Typical Transmission</b></p>          | <p>Typical transmission of a 3mm thick N-BK7 window with VIS 0° (425-675nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{avg} \leq 0.4\% @ 425 - 675\text{nm}</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>                                                                                                                   |



