

TECHSPEC<sup>®</sup> 18mm Dia x 36mm FL VIS 0° Coated, UV Plano-Convex Lens



UV Fused Silica Plano-Convex (PCX) Lenses



Stock **#36-723** 5 In Stock

-

1

+

€167<sup>00</sup>

ADD TO CART

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-5        | €167,00 each                  |
| Qty 6-25       | €133,00 each                  |
| Qty 26-49      | €126,00 each                  |
| Need More?     | <a href="#">Request Quote</a> |

ⓘ Prices shown are exclusive of VAT/local taxes

Product Downloads

General

Plano-Convex Lens

Type:

Physical & Mechanical Properties

|                      |                           |
|----------------------|---------------------------|
| 18.00 +0.0/-0.025    | Diameter (mm):            |
| <1                   | Centering (arcmin):       |
| 4.50 ±0.10           | Center Thickness CT (mm): |
| 1.83                 | Edge Thickness ET (mm):   |
| 17                   | Clear Aperture CA (mm):   |
| Protective as needed | Bevel:                    |

|                             |                                  |
|-----------------------------|----------------------------------|
| Optical Properties          |                                  |
| 36.00 @ 587.6nm             | Effective Focal Length EFL (mm): |
| 32.92                       | Back Focal Length BFL (mm):      |
| VIS 0° (425-675nm)          | Coating:                         |
| Ravg ≤0.4% @ 425 - 675nm    | Coating Specification:           |
| Fused Silica (Corning 7980) | Substrate: □                     |
| 40-20                       | Surface Quality:                 |
| 1.5λ                        | Power (P-V) @ 632.8nm:           |
| λ/4                         | Irregularity (P-V) @ 632.8nm:    |
| ±1                          | Focal Length Tolerance (%):      |
| 16.51                       | Radius R <sub>1</sub> (mm):      |
| 2                           | f/#:                             |
| 0.25                        | Numerical Aperture NA:           |
| 425 - 675                   | Wavelength Range (nm):           |
| 5 J/cm² @ 532nm, 10ns       | Damage Threshold, Reference: □   |

|                       |                             |
|-----------------------|-----------------------------|
| Regulatory Compliance |                             |
| Compliant             | RoHS 2015:                  |
| View                  | Certificate of Conformance: |
| Compliant             | Reach 235:                  |

## Custom

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

## Product Details


- AR Coated to Provide <0.4% Reflection per Surface for 425 - 675nm
- Precision Fused Silica Substrate
- Various Coating Options: [Uncoated](#), [MgF<sub>2</sub>](#), [UV-AR](#), [UV-VIS](#), [VIS-EXT](#), [VIS-NIR](#), [YAG-BBAR](#), [NIR I](#), and [NIR II](#)

TECHSPEC® UV Fused Silica Plano-Convex (PCX) Lenses VIS 0° Coated feature precision specifications and a [variety of coating options](#) on a broadband substrate. Fused Silica is commonly used in applications from the Ultraviolet (UV) through the Near-Infrared (NIR). Its low index of refraction, low coefficient of thermal expansion, and low inclusion content make it ideal for laser applications and harsh environmental conditions. TECHSPEC® UV Fused Silica Plano-Convex (PCX) Lenses VIS 0° Coated feature industry leading diameter and centration specifications, making them ideal for integration into demanding imaging and targeting applications. These lenses are VIS 0° coated to increase their coating performance in the visible region and are designed for 0 degrees angle of incidence.

Technical Information

FUSED SILICA

Uncoated Fused Silica  
Typical Transmission

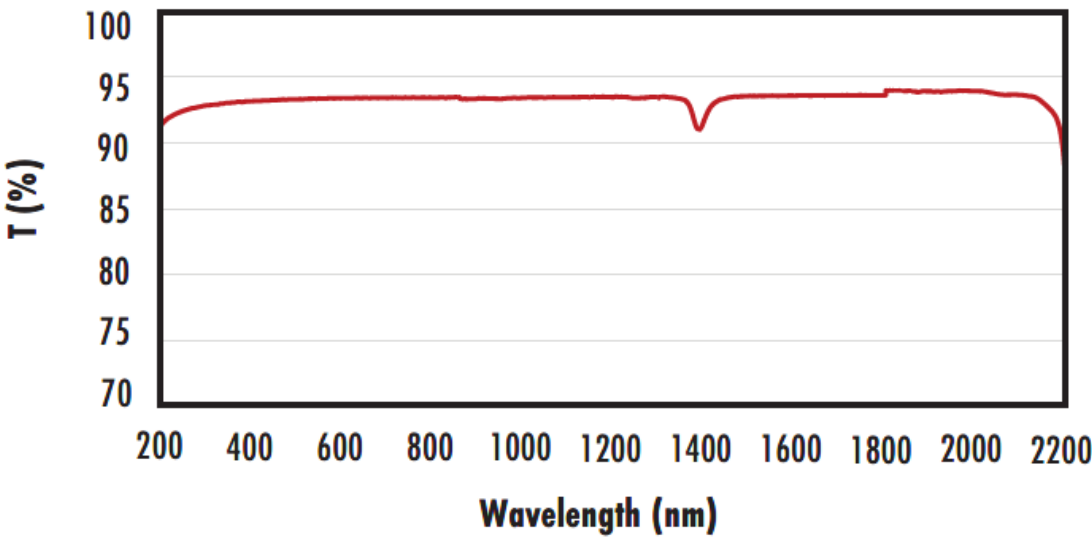

Typical transmission of a 3mm thick, uncoated fused silica window across the UV - NIR spectra.

[Click Here to Download Data](#)

Fused Silica with MgF<sub>2</sub> Coating  
Typical Transmission



Typical transmission of a 3mm thick fused silica window with MgF<sub>2</sub> (400-700nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{avg} \leq 1.75\% @ 400 - 700\text{nm}$  (N-BK7)

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

Fused Silica with UV-AR Coating  
Typical Transmission

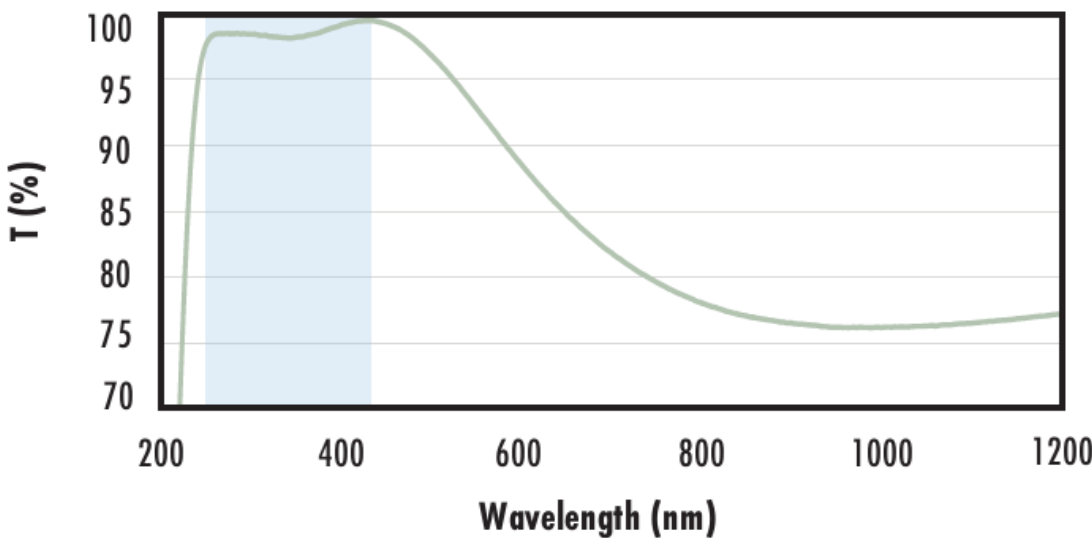

Typical transmission of a 3mm thick fused silica window with UV-AR (250-425nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{abs} \leq 1.0\% @ 250 - 425\text{nm}$   
 $R_{avg} \leq 0.75\% @ 250 - 425\text{nm}$   
 $R_{avg} \leq 0.5\% @ 370 - 420\text{nm}$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

Fused Silica with UV-VIS Coating  
Typical Transmission

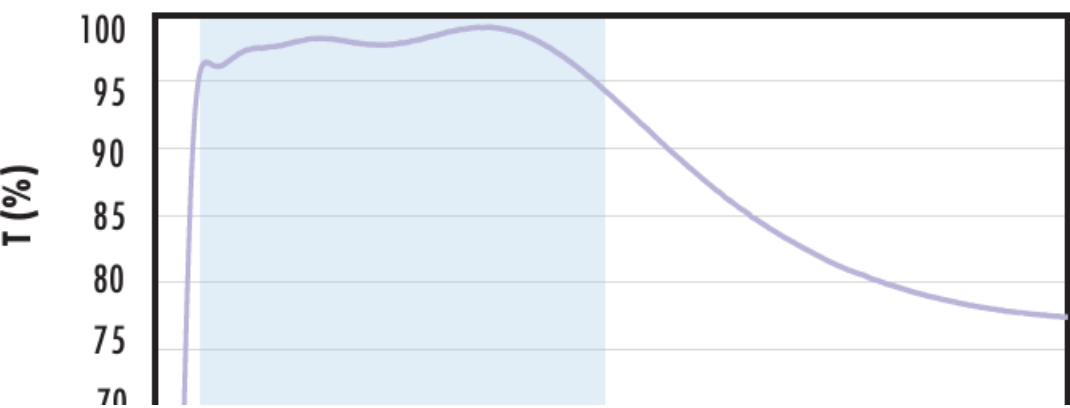

Typical transmission of a 3mm thick fused silica window with UV-VIS (250-700nm) coating at 0° AOI.



The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{abs} \leq 1.0\% @ 350 - 450\text{nm}$   
 $R_{avg} \leq 1.5\% @ 250 - 700\text{nm}$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

|                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <p data-bbox="569 252 1079 359"><b>Fused Silica with VIS-EXT Coating</b><br/><b>Typical Transmission</b></p>       | <p data-bbox="1341 436 1839 486">Typical transmission of a 3mm thick fused silica window with VIS-EXT (350-700nm) coating at 0° AOI.</p> <p data-bbox="1333 498 1852 549">The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p data-bbox="1478 560 1707 584"><math>R_{avg} \leq 0.5\% @ 350 - 700\text{nm}</math></p> <p data-bbox="1341 596 1839 647">Data outside this range is not guaranteed and is for reference only.</p> <p data-bbox="1474 658 1711 682"><a href="#">Click Here to Download Data</a></p>                                                                                                                                                                                                  |
| <p data-bbox="573 928 1075 1035"><b>Fused Silica with VIS-NIR Coating</b><br/><b>Typical Transmission</b></p>    | <p data-bbox="1341 1077 1839 1127">Typical transmission of a 3mm thick fused silica window with VIS-NIR (400-1000nm) coating at 0° AOI.</p> <p data-bbox="1333 1139 1852 1190">The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p data-bbox="1493 1202 1692 1225"><math>R_{abs} \leq 0.25\% @ 880\text{nm}</math></p> <p data-bbox="1472 1225 1713 1249"><math>R_{avg} \leq 1.25\% @ 400 - 870\text{nm}</math></p> <p data-bbox="1467 1249 1717 1273"><math>R_{avg} \leq 1.25\% @ 890 - 1000\text{nm}</math></p> <p data-bbox="1341 1308 1839 1359">Data outside this range is not guaranteed and is for reference only.</p> <p data-bbox="1474 1371 1711 1394"><a href="#">Click Here to Download Data</a></p> |
| <p data-bbox="569 1602 1079 1709"><b>Fused Silica with VIS 0° Coating</b><br/><b>Typical Transmission</b></p>    | <p data-bbox="1329 1780 1856 1831">Typical transmission of a 3mm thick fused silica window with VIS 0° (425-675nm) coating at 0° AOI.</p> <p data-bbox="1333 1843 1852 1893">The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p data-bbox="1478 1905 1707 1929"><math>R_{avg} \leq 0.4\% @ 425 - 675\text{nm}</math></p> <p data-bbox="1341 1941 1839 1991">Data outside this range is not guaranteed and is for reference only.</p> <p data-bbox="1474 2003 1711 2027"><a href="#">Click Here to Download Data</a></p>                                                                                                                                                                                         |
| <p data-bbox="548 2273 1100 2380"><b>Fused Silica with YAG-BBAR Coating</b><br/><b>Typical Transmission</b></p>  | <p data-bbox="1341 2427 1839 2478">Typical transmission of a 3mm thick fused silica window with YAG-BBAR (500-1100nm) coating at 0° AOI.</p> <p data-bbox="1333 2490 1852 2540">The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p data-bbox="1493 2552 1692 2576"><math>R_{abs} \leq 0.25\% @ 532\text{nm}</math></p> <p data-bbox="1493 2576 1692 2599"><math>R_{abs} \leq 0.25\% @ 1064\text{nm}</math></p> <p data-bbox="1472 2599 1713 2623"><math>R_{avg} \leq 1.0\% @ 500 - 1100\text{nm}</math></p> <p data-bbox="1341 2635 1839 2686">Data outside this range is not guaranteed and is for reference only.</p> <p data-bbox="1474 2697 1711 2721"><a href="#">Click Here to Download Data</a></p>      |
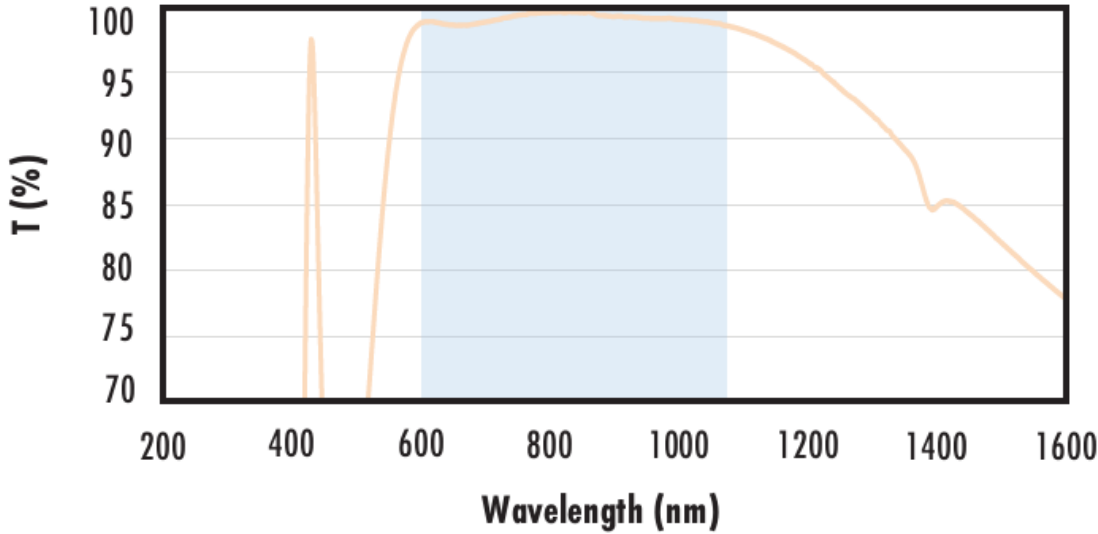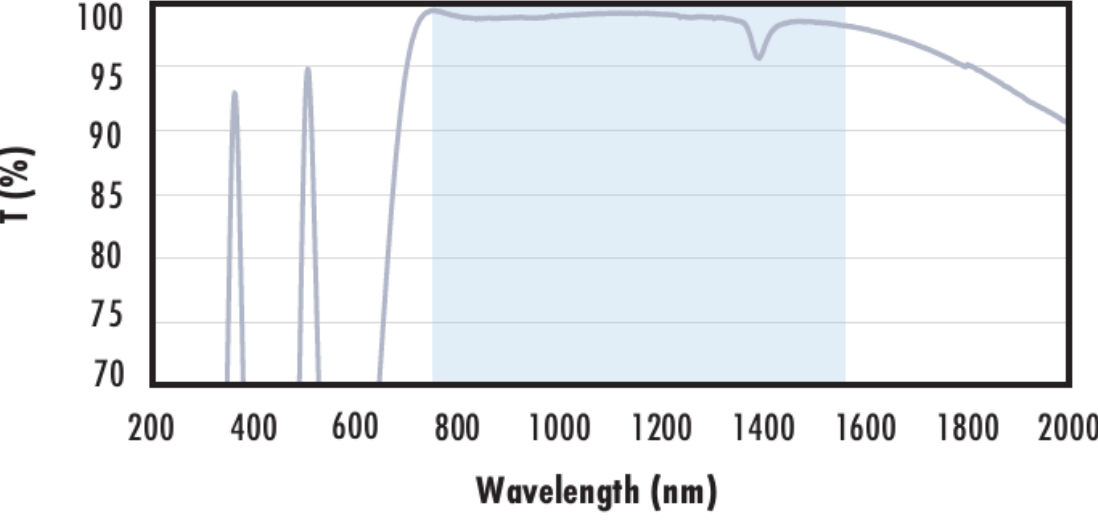
|                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div data-bbox="258 121 1283 750"><h3>Fused Silica with NIR I Coating<br/>Typical Transmission</h3></div>    | <div data-bbox="1325 299 1858 552"><p>Typical transmission of a 3mm thick fused silica window with NIR I (600 - 1050nm) coating at 0° AOI.</p><p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p><p><math>R_{avg} \leq 0.5\% \text{ @ } 600 - 1050\text{nm}</math></p><p>Data outside this range is not guaranteed and is for reference only.</p><p><a href="#">Click Here to Download Data</a></p></div>                                                                                                                                        |
| <div data-bbox="258 801 1283 1418"><h3>Fused Silica with NIR II Coating<br/>Typical Transmission</h3></div> | <div data-bbox="1325 940 1858 1264"><p>Typical transmission of a 3mm thick fused silica window with NIR II (750 - 1550nm) coating at 0° AOI.</p><p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p><p><math>R_{abs} \leq 1.5\% \text{ @ } 750 - 800\text{nm}</math><br/><math>R_{abs} \leq 1.0\% \text{ @ } 800 - 1550\text{nm}</math><br/><math>R_{avg} \leq 0.7\% \text{ @ } 750 - 1550\text{nm}</math></p><p>Data outside this range is not guaranteed and is for reference only.</p><p><a href="#">Click Here to Download Data</a></p></div> |

Coating Curves

Compatible Mounts