



**TECHSPEC® 25.0mm Dia. x -200 FL, 1064nm V-Coat, UV Plano-Concave Lens**

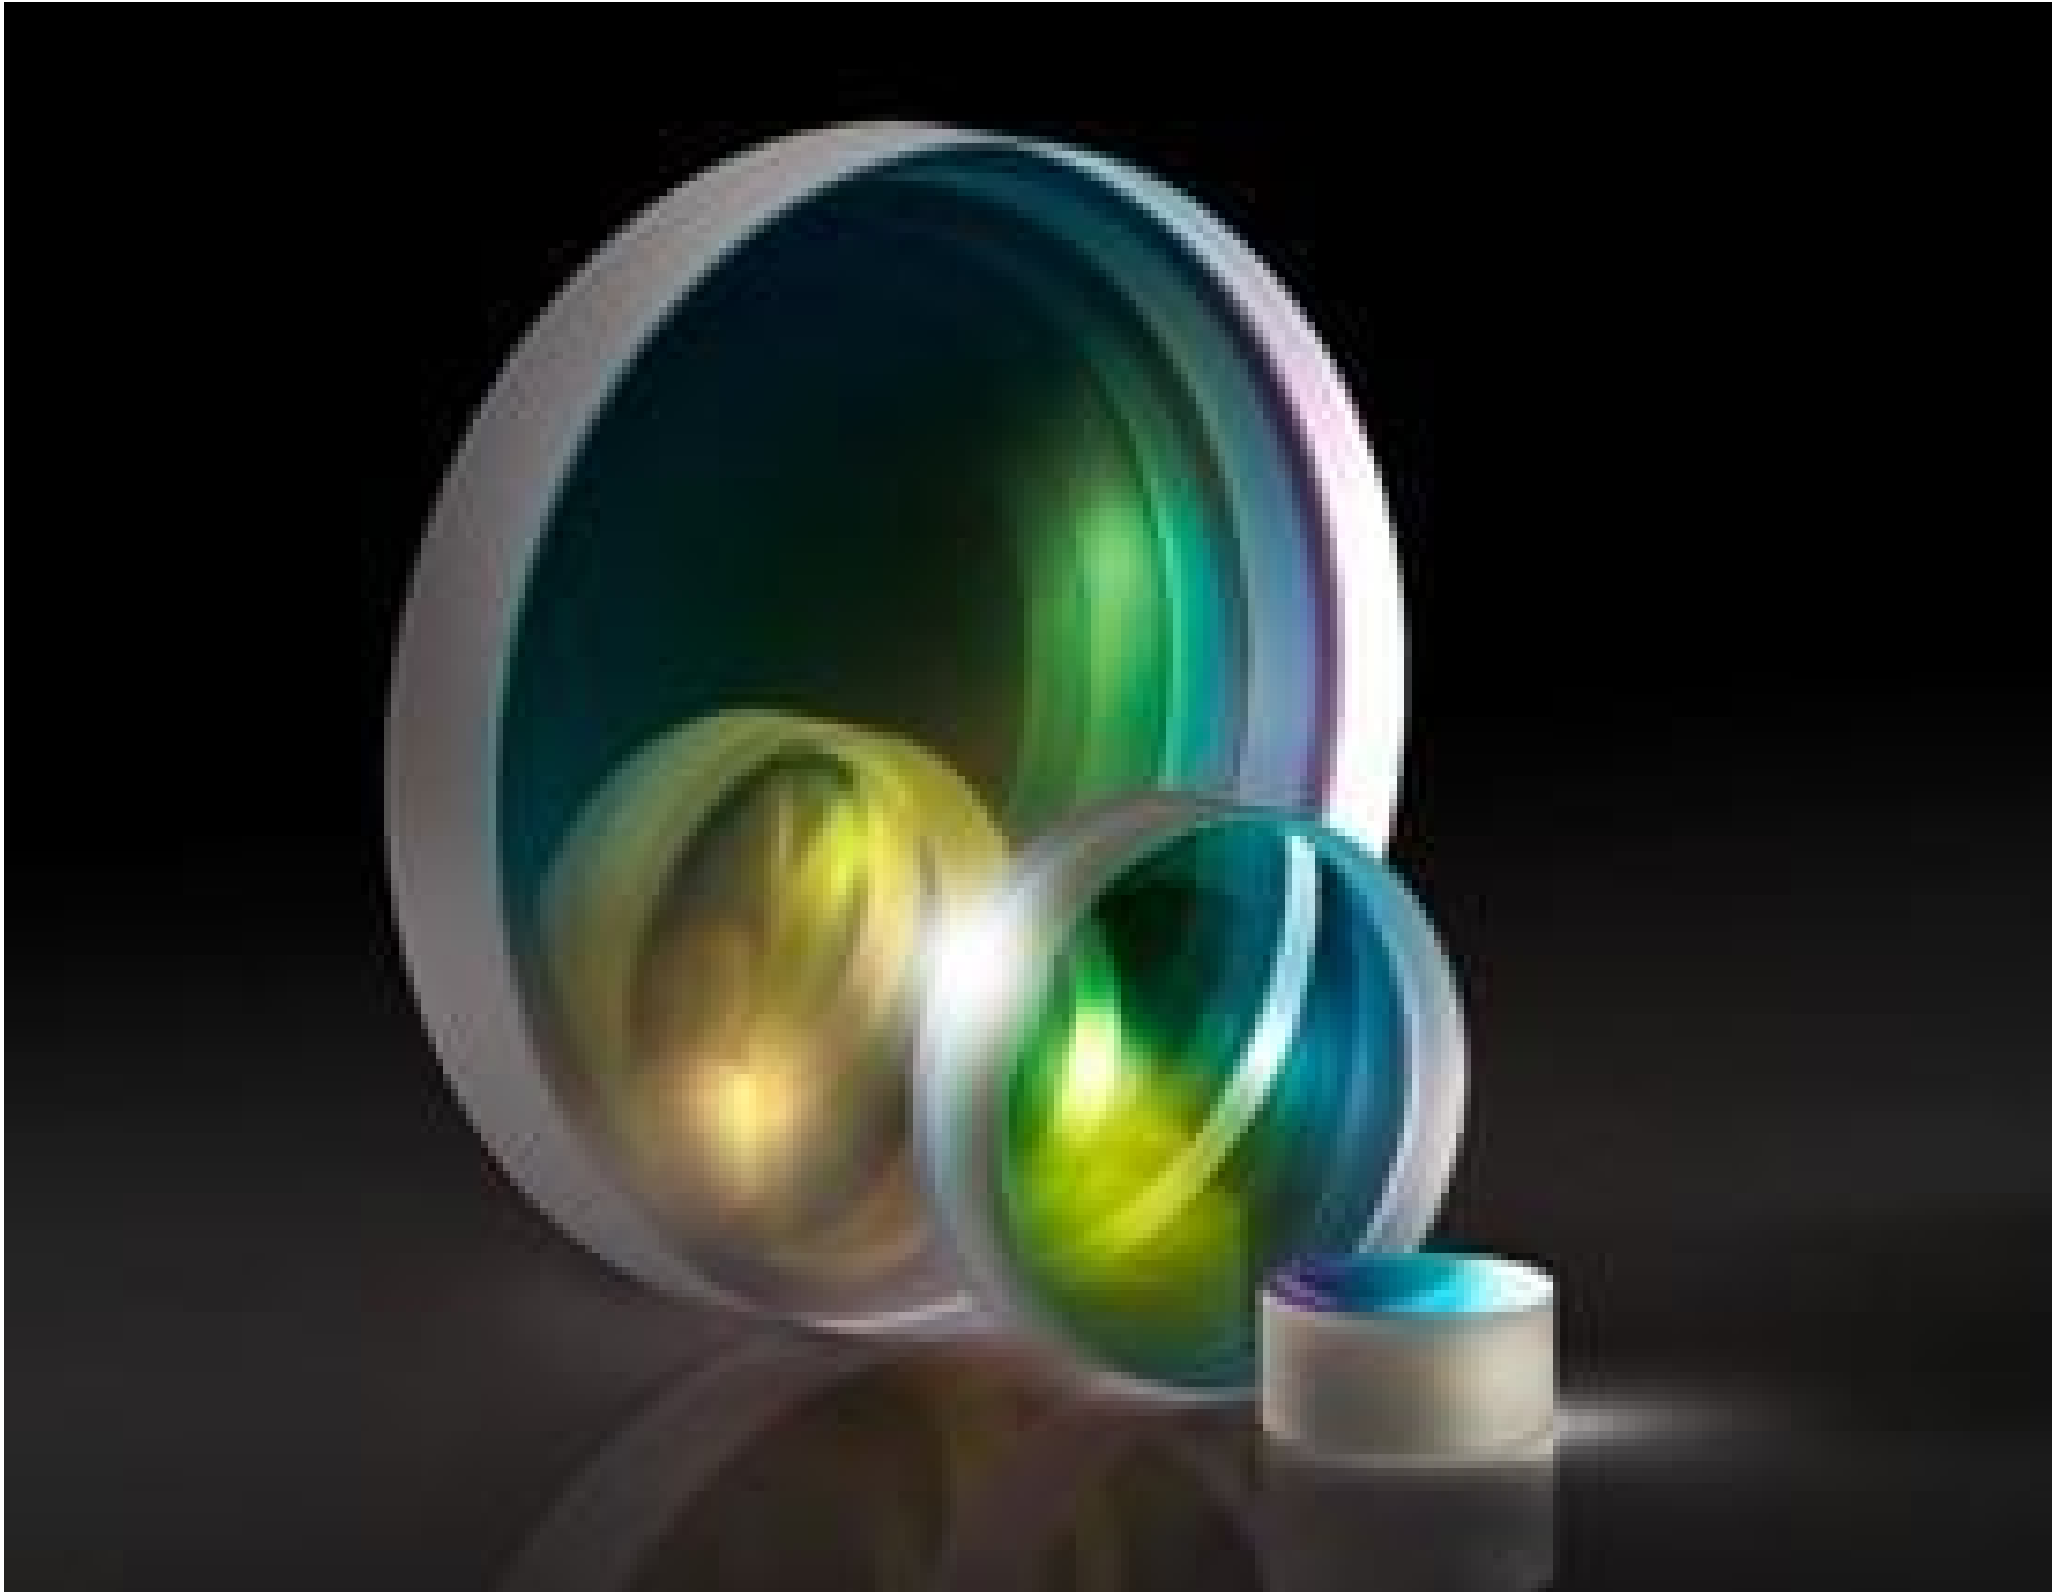

Stock #21-041 **3 In Stock**

⊖ 1 ⊕ €164.<sup>00</sup>

**ADD TO CART**

Volume Pricing	
Qty 1-5	€164,00 each
Qty 6-25	€131,00 each
Qty 26-49	€123,00 each
Need More?	<a href="#">Request Quote</a>

ⓘ Prices shown are exclusive of VAT/local taxes

Product Downloads

**General**

Plano-Concave Lens

Type:

Max. Flat Annulus is 0.3mm

Note:

## Physical & Mechanical Properties

25.00 +0.0/-0.025 **Diameter (mm):**

2.50 **Center Thickness CT (mm):**

±0.10 **Center Thickness Tolerance (mm):**

<1 **Centering (arcmin):**

24 **Clear Aperture CA (mm):**

3.32 **Edge Thickness ET (mm):**

## Optical Properties

-200.00 **Effective Focal Length EFL (mm):**

**Fused Silica** (Coming 7980) **Substrate:**

8.00 **f#:**

0.06 **Numerical Aperture NA:**

1064nm V-Coat **Coating:**

-201.71 **Back Focal Length BFL (mm):**

$R_{\text{abs}} < 0.25\%$  @ 1064nm **Coating Specification:**

1064 **Design Wavelength DWL (nm):**

587.6 **Focal Length Specification Wavelength (nm):**

±1 **Focal Length Tolerance (%):**

-91.69 **Radius R<sub>1</sub> (mm):**

40-20 **Surface Quality:**

15 J/cm<sup>2</sup> @ 1064nm, 10ns **Damage Threshold, By Design:**

1.5λ **Power (P-V) @ 632.8nm:**

λ/4 **Irregularity (P-V) @ 632.8nm:**

## Regulatory Compliance

[View](#) **Certificate of Conformance:**

### Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

## Product Details

- Negative Focal Lengths for Beam Expansion or Light Projection Applications
- Research-Grade Synthetic Fused Silica Substrate
- <0.25% Reflection at 1064nm for Nd:YAG and Fiber Laser Applications
- [Uncoated and BBAR Coating Options](#) Available

TECHSPEC® 1064nm Laser Line Coated UV Fused Silica Plano-Concave (PCV) Lenses are high performance lenses that feature a low coefficient of thermal expansion. Manufactured using research-grade synthetic fused silica, these lenses provide excellent transmission and chemical purity. TECHSPEC® 1064nm Laser Line Coated UV Fused Silica Plano-Concave (PCV) Lenses are designed for maximum throughput at 1064nm, making them ideal for applications utilizing Nd:YAG laser sources. With a maximum reflection of <0.25% per surface at the design wavelength, the lenses will provide superior transmission in applications utilizing multiple optical components.

## Compatible Mounts

---