



[See all 3 Products in Family](#)

25.4mm Dia., 4mm Thick, Uncoated, ISP Optics Lithium Fluoride (LiF) Window | LF-W-25-4

See More by [ISP Optics](#)

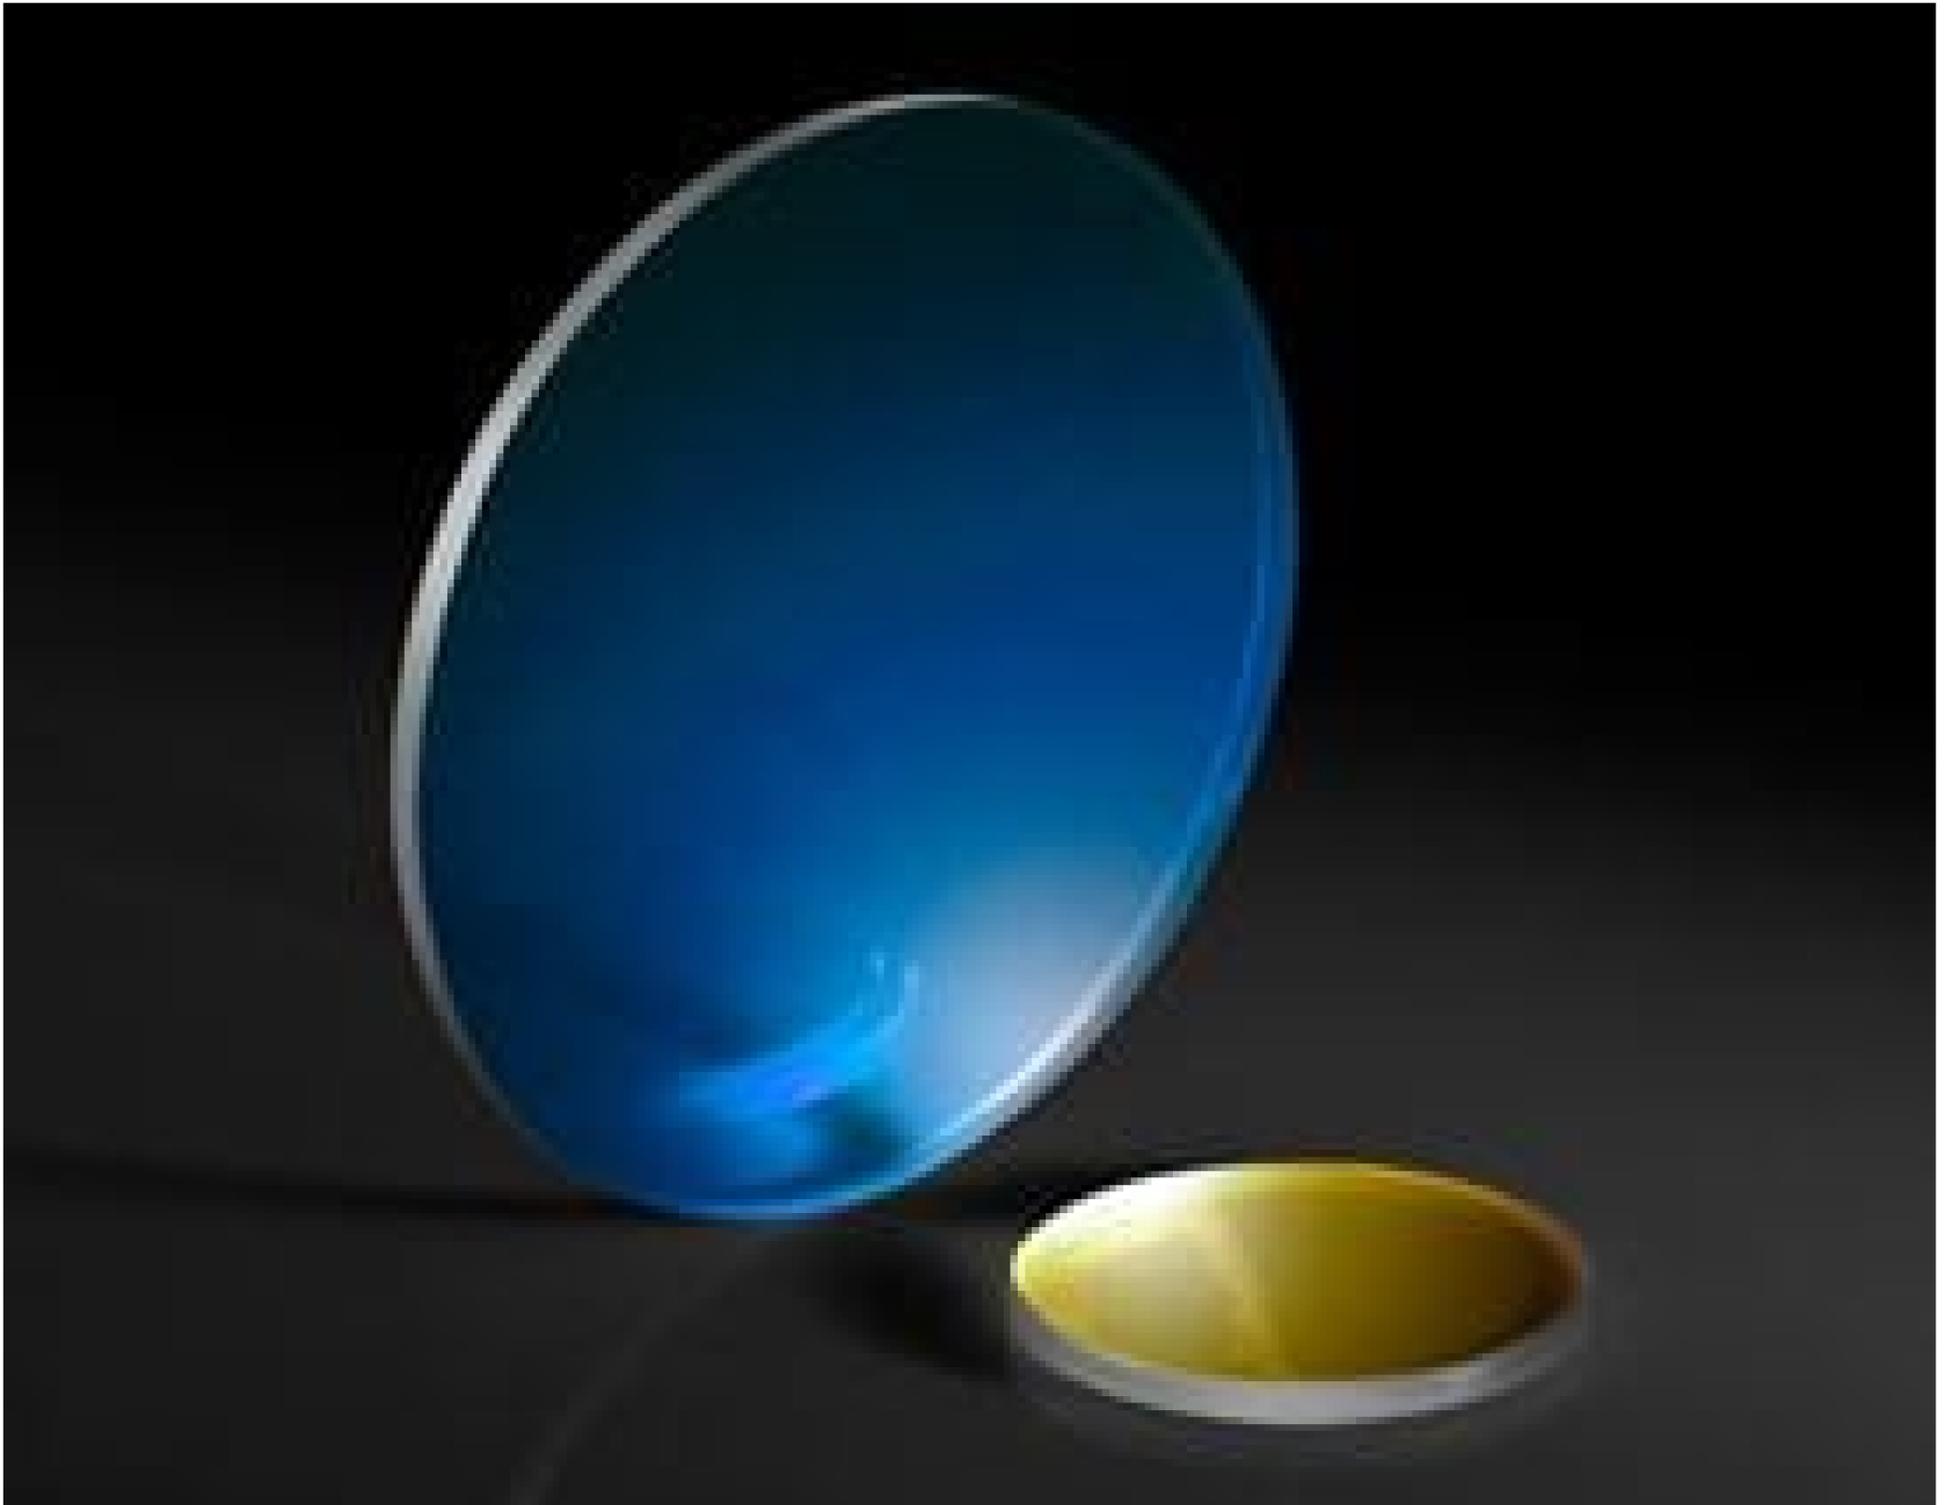

Stock **#24-475** CLEARANCE CONTACT US

- 1 + €196⁰⁰

ADD TO CART

Volume Pricing

Qty 1+	€196,00 each
Need More?	Request Quote

i Prices shown are exclusive of VAT/local taxes

Product Downloads

General

LF-W-25-4 **Model Number:**

Protective Window **Type:**

Physical & Mechanical Properties

Clear Aperture CA (mm):

21.59

25.40 +0.00/-0.13

Diameter (mm):

4.00 ±0.13

Thickness (mm):

<3

Parallelism (arcmin):

Protective as needed

Bevel:

90

Clear Aperture (%):

Fine Ground

Edges:

0.33

Poisson's Ratio:

64.97

Young's Modulus (GPa):

102.00

Knoop Hardness (kg/mm²):

Optical Properties

Uncoated

Coating:

Lithium Fluoride (LiF)

Substrate:

1.392

Index of Refraction (n_d):

60-40

Surface Quality:

97.29

Abbe Number (v_d):

Random

Axis Orientation:

150 - 6000

Wavelength Range (nm):

2λ@632.8nm

Surface Flatness (P-V):

Material Properties

2.64

Density (g/cm³):

37

Coefficient of Thermal Expansion CTE (10⁻⁶/°C):

Regulatory Compliance

[View](#)

Certificate of Conformance:

Product Details

- Excellent Vacuum UV (VUV) Transmission
- High Transmission from 150nm - 6μm
- Low Index of Refraction

ISP Optics Lithium Fluoride (LiF) Windows provide excellent transmission in the vacuum ultraviolet (VUV) wavelength range of 150 – 200nm, as well as at the hydrogen Lyman-alpha line (121nm). In addition to high transmission into the UV, these windows also feature superior transmission in the Visible and Infrared up to 6μm. Lithium fluoride has a low index of refraction, allowing these windows to be used without an anti-reflection (AR) coating. ISP Optics Lithium Fluoride (LiF) Windows are ideal for use as UV transmission windows in spectroscopy applications, as a diffracting element in X-ray spectrometry, or as infrared windows for thermal imaging applications.

Note: Lithium fluoride is sensitive to thermal shock and is attacked by atmospheric moisture at temperatures above 400°C.

Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools