

## 25mm Dia., 488nm Laser Line Longpass Filter



Laser Line Longpass Filters

Stock #47-503 **1 In Stock**

⊖ 1 ⊕ €830<sup>40</sup>

**ADD TO CART**

### Volume Pricing

Qty 1+	€830,40 each
Need More?	<a href="#">Request Quote</a>

**!** Prices shown are exclusive of VAT/local taxes

### Product Downloads

#### General

Longpass Filter **Type:**

**Angle Tuning Range, for 0 - 8° Shift:**  
-0.3% of Laser Wavelength

Bandwidth (nm): >600 **Note:**

#### Physical & Mechanical Properties

**Diameter (mm):**

25.00 +0.0/-0.1

Clear Aperture CA (mm):

22

Clear Aperture (%):

88

## Optical Properties

Angle of Incidence (°):

0 ±2

Bandwidth (nm):

>600

OD 6 Blocking Wavelength Range (nm):

394 - 488

Optical Density OD (Average):

≥6.0

Design Wavelength DWL (nm):

488

Substrate:

[Fused Silica](#) (Corning 7980)

Coating:

Hard Coated

Surface Quality:

60-40

Transmission (%):

93.00

Transmission Wavelength (nm):

494.3 - 1100.8

Edge Steepness (nm):

2.40

Transition Width (nm):

<4.9

Laser Blocking Wavelength (nm):

488

Damage Threshold, By Design:

0.5 J/cm<sup>2</sup> @ 266nm, 10ns, 10Hz

1 J/cm<sup>2</sup> @ 532nm, 10ns, 10Hz

## Threading & Mounting

Mount Thickness (mm):

3.5

## Environmental & Durability Factors

Durability:

Environmental: ML-STD-810F, Physical: ML-C-48497A

Temperature Dependence (ppm/°C):

<5

## Regulatory Compliance

RoHS 2015:

[Compliant](#)

Reach 209:

[Compliant](#)

Certificate of Conformance:


[View](#)

## Product Details

- Up to 93% Transmission to Detect Weak Signals
- Deep > OD 6 Blocking for Maximum Laser Rejection
- Ideal for Raman Spectroscopy, Confocal Microscopy, and Biotech Instrumentation
- Unrivaled Performance and Lifetime

Our Laser Line Longpass filters offer unprecedented performance in longpass laser edge filter applications. The steep edges (measured from an optical density of 6.0 to a transmission of 50%) make it possible to measure even the smallest Raman shifts, making these filters a superior alternative to costly holographic notch filters for Stokes Raman scattering measurements. Compared to notch filters, these edge filters offer better transmission, higher laser line blocking, and steeper edges, permitting measurement of Raman signals extremely close to the laser line. The large bandwidths and exceptional transmission permit these filters to be used in even the most demanding imaging applications.

## Technical Information

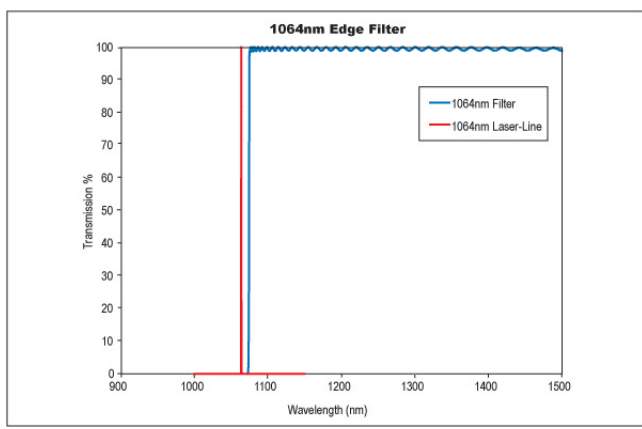

## Compatible Mounts

;