

[See all 12 Products in Family](#)

25mm Dia. Left-Handed Uncoated Glass Circular Polarizer (CP42HE)



Stock **#19-929** 7 In Stock

-

1

+

€57^{.00}

ADD TO CART

Volume Pricing	
Qty 1-9	€57,00 each
Qty 10-25	€51,50 each
Need More?	Request Quote

 Prices shown are exclusive of VAT/local taxes

Product Downloads

General	
Left-Handed Circular Polarizer	Type:
Physical & Mechanical Properties	
25.00	Diameter (mm):
2.00 ±0.10	Thickness (mm):


Dimensional Tolerance (mm):		±0.20
Construction:		Laminated Glass Polarizing Film
Optical Properties		
Coating:		Uncoated
Substrate:		Polymer Film CP42HE Laminated Between Glass
Transmission (%):		42 ±2
Wavelength Range (nm):		400 - 700
Polarization Efficiency (%):		>99.90
Environmental & Durability Factors		
Operating Temperature (°C):		-40 to +80
Regulatory Compliance		
RoHS 2015:		Compliant
Certificate of Conformance:		View
Reach 235:		Compliant

Product Details

- Uncoated and Visible AR Coated Options
- Left-Hand Circular Polarization
- Increased Durability in Machine Vision Applications

Glass Circular Polarizers (CP42HE) are designed for reducing surface reflection and glare, making them ideal for a variety of imaging applications. These circular polarizers feature a linear sheet polarizer and quarter-wave retarder laminated between two optical-grade glass windows. The window substrates provide increased rigidity and durability in industrial applications. An anti-reflection (AR) coating option provides increased transmission of visible light from 425 – 700nm. Glass Circular Polarizers (CP42HE) provide a left-handed polarization direction. Example imaging applications include machine vision, digital image processing, and photography.

Technical Information

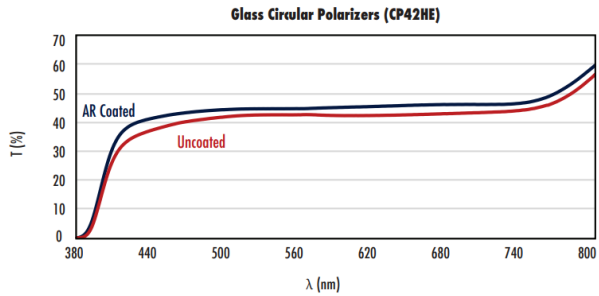

Custom

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).