

[See all 245 Products in Family](#)

TECHSPEC<sup>®</sup> 25mm Dia. x 200mm FL, VIS 0° Coated, UV Double-Convex Lens



UV Fused Silica Double-Convex (DCX) Lenses



Stock **#48-989** 20+ In Stock

[Other Coating Options](#)

-

1

+

€156<sup>.00</sup>

ADD TO CART

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-5        | €156,00 each                  |
| Qty 6-25       | €125,00 each                  |
| Qty 26-49      | €117,00 each                  |
| Need More?     | <a href="#">Request Quote</a> |

Prices shown are exclusive of VAT/local taxes

Product Downloads

General

Type:

Double-Convex Lens

Physical & Mechanical Properties

|                      |                           |
|----------------------|---------------------------|
| 25.00 +0.0/-0.025    | Diameter (mm):            |
| <1                   | Centering (arcmin):       |
| Protective as needed | Bevel:                    |
| 3.38 ±0.10           | Center Thickness CT (mm): |
| 2.52                 | Edge Thickness ET (mm):   |
| 24.00                | Clear Aperture CA (mm):   |

|                                      |                                                       |
|--------------------------------------|-------------------------------------------------------|
| Optical Properties                   |                                                       |
| 198.84                               | Back Focal Length BFL (mm):                           |
| 200.00                               | Effective Focal Length EFL (mm):                      |
| VIS 0° (425-675nm)                   | Coating:                                              |
| R <sub>avg</sub> ≤0.4% @ 425 - 675nm | Coating Specification:                                |
| Fused Silica (Corning 7980)          | Substrate: <input type="checkbox"/>                   |
| 40-20                                | Surface Quality:                                      |
| 1.5λ                                 | Power (P-V) @ 632.8nm:                                |
| λ/4                                  | Irregularity (P-V) @ 632.8nm:                         |
| 182.85                               | Radius R <sub>1</sub> =R <sub>2</sub> (mm):           |
| 8.00                                 | f/#:                                                  |
| 587.6                                | Focal Length Specification Wavelength (nm):           |
| ±1                                   | Focal Length Tolerance (%):                           |
| 0.06                                 | Numerical Aperture NA:                                |
| 425 - 675                            | Wavelength Range (nm):                                |
| 5 J/cm² @ 532nm, 10ns                | Damage Threshold, Reference: <input type="checkbox"/> |

|                       |                             |
|-----------------------|-----------------------------|
| Regulatory Compliance |                             |
| Compliant             | RoHS 2015:                  |
| View                  | Certificate of Conformance: |
| Compliant             | Reach 235:                  |

## Product Details

- Ideal for Imaging Applications
- Minimize Aberrations Including Spherical and Coma
- Precision Fused Silica Substrate

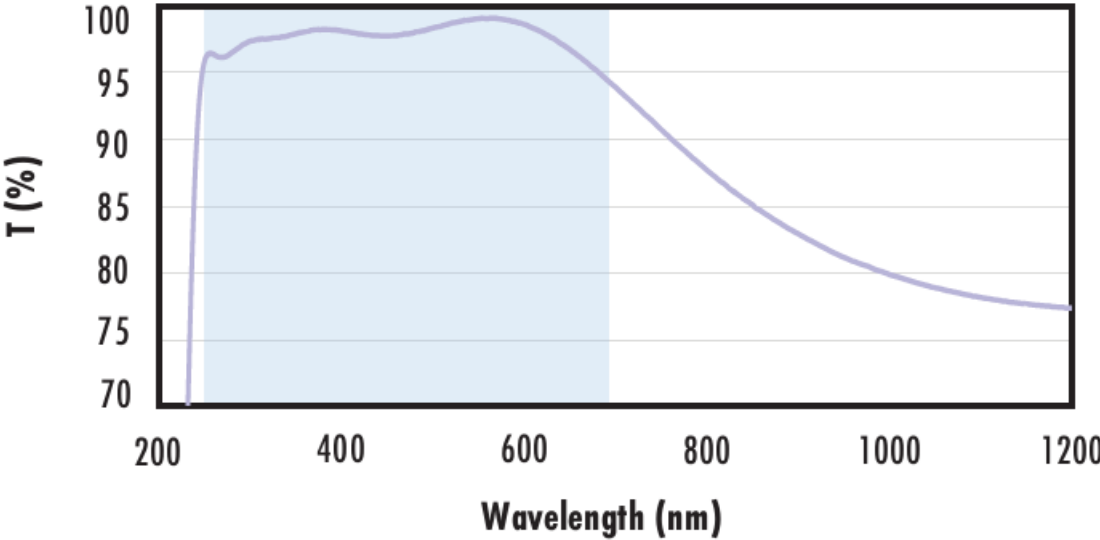
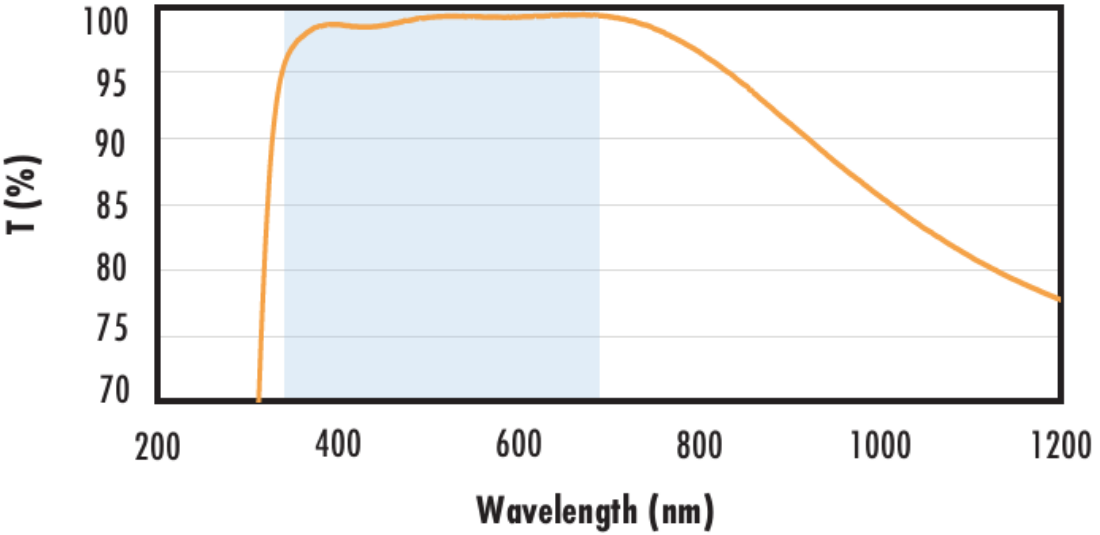
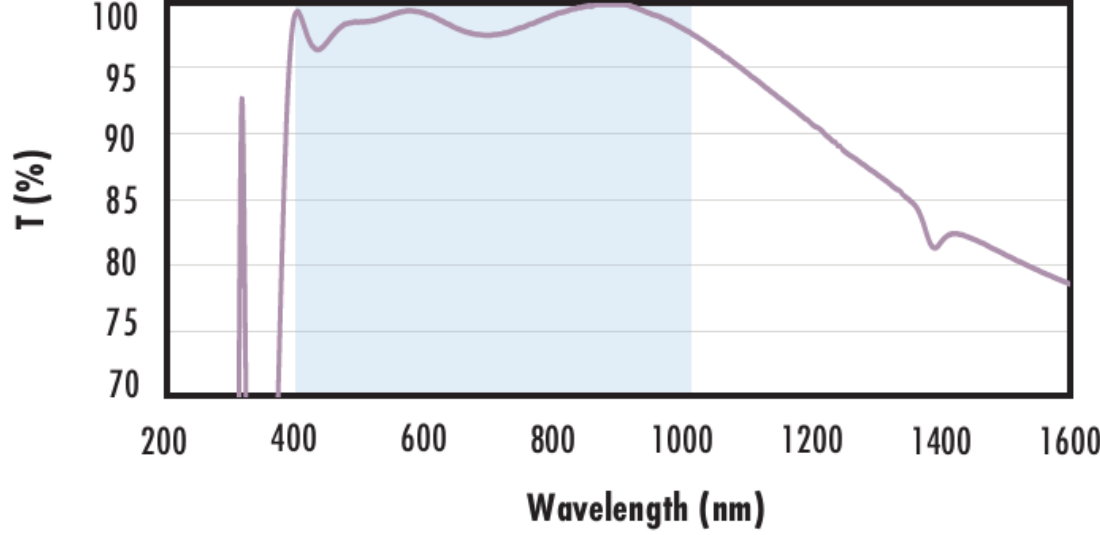
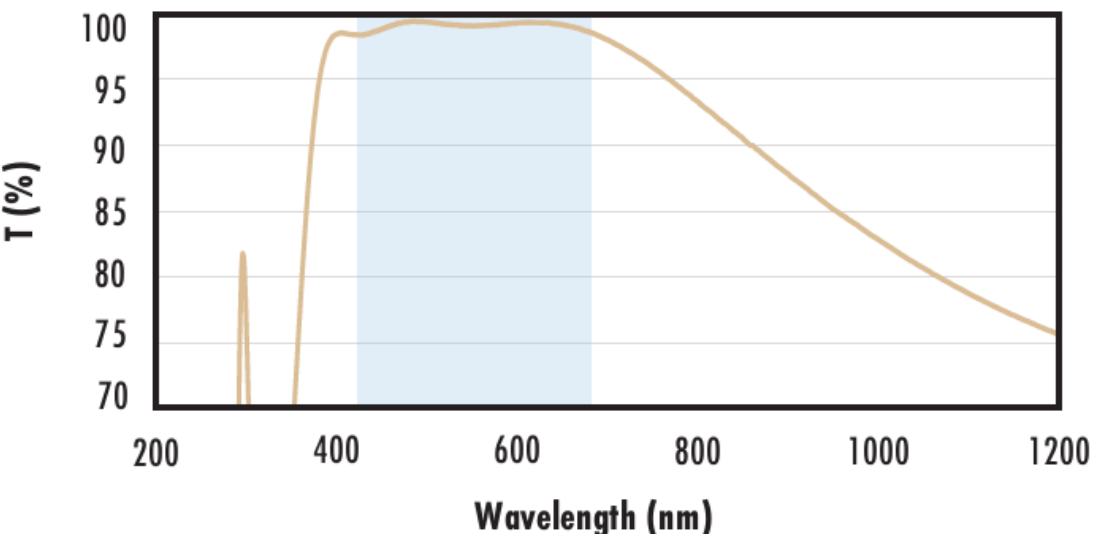
TECHSPEC® UV Fused Silica Double-Convex (DCX) Lenses, also referred to as bi-convex lenses, have two positive, symmetrical faces with equal radii on both sides. These lenses are generally recommended for finite imaging applications with a conjugate ratio (ratio between object distance and image distance) between 0.2 and 5. At a conjugate ratio of 1, aberrations such as spherical aberration, chromatic aberration, coma, and distortion are minimized or canceled due to the symmetric lens design. TECHSPEC® UV Fused Silica Double-Convex (DCX) Lenses have a precision fused silica substrate. These lenses are available uncoated or with UV-AR, UV-VIS, VIS-EXT, VIS-NIR, VIS 0°, NIR I, or NIR II coatings.

## Technical Information



UV FS Transmission Curve

| FUSED SILICA                                                                                                                                                                                                                                                                   |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div><div>Uncoated Fused Silica<br/>Typical Transmission</div><div><div><div>T (%)</div><div>100<br/>95<br/>90<br/>85<br/>80<br/>75<br/>70</div><div><div>2004006008001000120014001600180020002200</div><div>Wavelength (nm)</div></div></div></div></div>                     |  | <div>Typical transmission of a 3mm thick, uncoated fused silica window across the UV - NIR spectra.</div> <div><a href="#">Click Here to Download Data</a></div>                                                                                                                                                                                                                                                                                                                                                        |
| <div><div>Fused Silica with MgF<sub>2</sub> Coating<br/>Typical Transmission</div><div><div><div>T (%)</div><div>100<br/>95<br/>90<br/>85<br/>80<br/>75<br/>70</div><div><div>2004006008001000120014001600180020002200</div><div>Wavelength (nm)</div></div></div></div></div> |  | <div>Typical transmission of a 3mm thick fused silica window with MgF<sub>2</sub> (400-700nm) coating at 0° AOI.</div> <div>The blue shaded region indicates the coating design wavelength range, with the following specification:</div> <div>R<sub>avg</sub> ≤ 1.75% @ 400 - 700nm (N-BK7)</div> <div>Data outside this range is not guaranteed and is for reference only.</div> <div><a href="#">Click Here to Download Data</a></div>                                                                               |
| <div><div>Fused Silica with UV-AR Coating<br/>Typical Transmission</div><div><div><div>T (%)</div><div>100<br/>95<br/>90<br/>85<br/>80<br/>75<br/>70</div><div><div>20040060080010001200</div><div>Wavelength (nm)</div></div></div></div></div>                               |  | <div>Typical transmission of a 3mm thick fused silica window with UV-AR (250-425nm) coating at 0° AOI.</div> <div>The blue shaded region indicates the coating design wavelength range, with the following specification:</div> <div>R<sub>abs</sub> ≤ 1.0% @ 250 - 425nm</div> <div>R<sub>avg</sub> ≤ 0.75% @ 250 - 425nm</div> <div>R<sub>avg</sub> ≤ 0.5% @ 370 - 420nm</div> <div>Data outside this range is not guaranteed and is for reference only.</div> <div><a href="#">Click Here to Download Data</a></div> |

|                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div><div>Fused Silica with UV-VIS Coating</div><div>Typical Transmission</div></div>    | <div>Typical transmission of a 3mm thick fused silica window with UV-VIS (250-700nm) coating at 0° AOI.</div> <div>The blue shaded region indicates the coating design wavelength range, with the following specification:</div> <div><div><math>R_{abs} \leq 1.0\% \text{ @ } 350 - 450\text{nm}</math></div><div><math>R_{avg} \leq 1.5\% \text{ @ } 250 - 700\text{nm}</math></div></div> <div>Data outside this range is not guaranteed and is for reference only.</div> <div><a href="#">Click Here to Download Data</a></div>                                                                         |
| <div><div>Fused Silica with VIS-EXT Coating</div><div>Typical Transmission</div></div>  | <div>Typical transmission of a 3mm thick fused silica window with VIS-EXT (350-700nm) coating at 0° AOI.</div> <div>The blue shaded region indicates the coating design wavelength range, with the following specification:</div> <div><math>R_{avg} \leq 0.5\% \text{ @ } 350 - 700\text{nm}</math></div> <div>Data outside this range is not guaranteed and is for reference only.</div> <div><a href="#">Click Here to Download Data</a></div>                                                                                                                                                           |
| <div><div>Fused Silica with VIS-NIR Coating</div><div>Typical Transmission</div></div> | <div>Typical transmission of a 3mm thick fused silica window with VIS-NIR (400-1000nm) coating at 0° AOI.</div> <div>The blue shaded region indicates the coating design wavelength range, with the following specification:</div> <div><div><math>R_{abs} \leq 0.25\% \text{ @ } 880\text{nm}</math></div><div><math>R_{avg} \leq 1.25\% \text{ @ } 400 - 870\text{nm}</math></div><div><math>R_{avg} \leq 1.25\% \text{ @ } 890 - 1000\text{nm}</math></div></div> <div>Data outside this range is not guaranteed and is for reference only.</div> <div><a href="#">Click Here to Download Data</a></div> |
| <div><div>Fused Silica with VIS 0° Coating</div><div>Typical Transmission</div></div>  | <div>Typical transmission of a 3mm thick fused silica window with VIS 0° (425-675nm) coating at 0° AOI.</div> <div>The blue shaded region indicates the coating design wavelength range, with the following specification:</div> <div><math>R_{avg} \leq 0.4\% \text{ @ } 425 - 675\text{nm}</math></div> <div>Data outside this range is not guaranteed and is for reference only.</div> <div><a href="#">Click Here to Download Data</a></div>                                                                                                                                                            |
| <div><div>Fused Silica with YAG-BBAR Coating</div><div>Typical Transmission</div></div>                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

|                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div><h3>Typical Transmission</h3></div>                                        | <div><p>Typical transmission of a 3mm thick fused silica window with YAG-BBAR (500-1100nm) coating at 0° AOI.</p><p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p><div><div><math>R_{abs} \leq 0.25\%</math> @ 532nm</div><div><math>R_{abs} \leq 0.25\%</math> @ 1064nm</div><div><math>R_{avg} \leq 1.0\%</math> @ 500 - 1100nm</div></div><p>Data outside this range is not guaranteed and is for reference only.</p><p><a href="#">Click Here to Download Data</a></p></div>           |
| <div><h3>Fused Silica with NIR I Coating<br/>Typical Transmission</h3></div>   | <div><p>Typical transmission of a 3mm thick fused silica window with NIR I (600 - 1050nm) coating at 0° AOI.</p><p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p><div><math>R_{avg} \leq 0.5\%</math> @ 600 - 1050nm</div><p>Data outside this range is not guaranteed and is for reference only.</p><p><a href="#">Click Here to Download Data</a></p></div>                                                                                                                              |
| <div><h3>Fused Silica with NIR II Coating<br/>Typical Transmission</h3></div> | <div><p>Typical transmission of a 3mm thick fused silica window with NIR II (750 - 1550nm) coating at 0° AOI.</p><p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p><div><div><math>R_{abs} \leq 1.5\%</math> @ 750 - 800nm</div><div><math>R_{abs} \leq 1.0\%</math> @ 800 - 1550nm</div><div><math>R_{avg} \leq 0.7\%</math> @ 750 - 1550nm</div></div><p>Data outside this range is not guaranteed and is for reference only.</p><p><a href="#">Click Here to Download Data</a></p></div> |

Coating Curves

Custom

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

Compatible Mounts