


[All Products](#) / [Optics](#) / [Windows](#) / [1λ UV Fused Silica Windows](#)

[See all 379 Products in Family](#)

TECHSPEC® 30mm

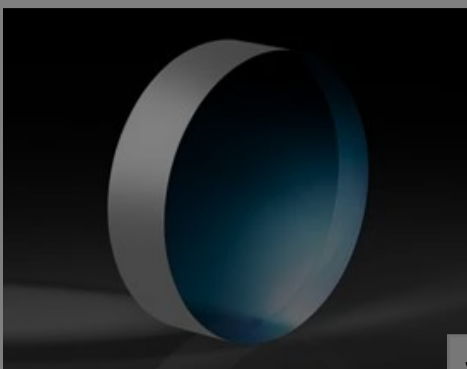

Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.

Select Your Country/Region: European Union

Submit

1

€101⁰⁰

ADD TO CART

Volume Pricing	
Qty 1-5	€101,00 each
Qty 6-25	€81,00 each
Qty 26-49	€76,00 each
Need More?	Request Quote

Prices shown are exclusive of VAT/local taxes

Product Downloads

- STEP:step
- PDF Drawing:pdf
- IGES:igs
- eDrawing:eprt
- EO Spec Sheet
- [Download All](#)

General

Type: Protective Window

Type of Window: Glass

Physical & Mechanical Properties

Clear Aperture CA (mm): 27.00

Diameter (mm): 30.00 +0.00/-0.20

Thickness (mm): 3.00 ±0.38

Parallelism (arcmin): <5

Dimensional Tolerance (mm): +0.00/-0.20

Bevel: Protective as needed

Clear Aperture (%): 90

Edges: Fine Ground

Poisson's Ratio: 0.16

Young's Modulus (GPa): 73

Knoop Hardness (kg/mm²): 522.00

Optical Properties

Coating: Uncoated

Substrate: **Fused Silica** (Corning 7980)

Index of Refraction (n_d): 1.458

Surface Quality: 60-40

Abbe Number (v_d): 67.8

Wavelength Range (nm): 200 - 2200

Surface Flatness (P-V): 1λ

Material Properties

**Density
(g/cm³):** 2.20

**Coefficient of
Thermal** 0.52 (+5 to
+35°C)

Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.

Select Your Country/Region:

**Fused Silica
Grade:** 7980 0G

Regulatory Compliance

RoHS 2015: **Compliant**

Reach 219: **Compliant**

**Certificate of
Conformance:** **View**

Need different specs or modifications?

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

Product Details

- Available Uncoated or with Broadband Anti-Reflection Coatings
- Ideal for Cost Sensitive Broadband Applications
- Circular and Square Sizes from 5mm to 100mm
- **$\lambda/4$** or **$\lambda/10$** UV Fused Silica Windows Also Available


TECHSPEC® 1 λ UV Fused Silica Windows are precision manufactured using UV-grade synthetic fused silica. In addition to superior transmission, the synthetic fused silica of these optical windows exhibits higher thermal properties, exceptional purity, and excellent environmental durability for demanding applications. The windows are ideal for cost-sensitive broadband applications and are available uncoated or with broadband anti-reflection coatings. TECHSPEC® 1 λ UV Fused Silica Windows have circular and square sizes ranging from 5mm to 100mm. **$\lambda/4$** or **$\lambda/10$** UV Fused Silica Windows are also available.

Note: New additions to this product family may be specified with a transmitted wavefront distortion (TWD) specification instead of a surface flatness. For more information on the difference between these two specifications, see our application note on [Understanding Optical Windows](#).

Technical Information

UV FS Transmission Curve


Uncoated Fused Silica Typical Transmission

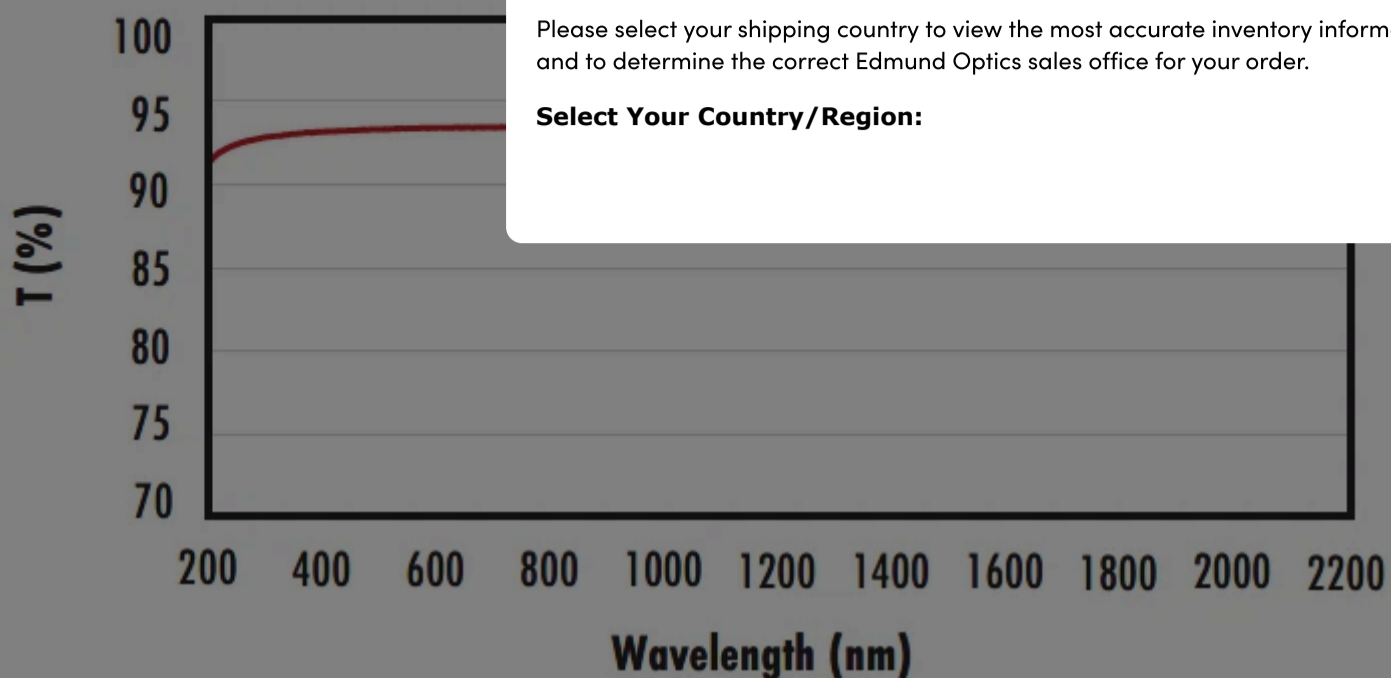

Typical transmission of a 3mm thick, uncoated fused silica window across the UV - NIR spectra.

[Click Here to Download Data](#)

Fused Silica with MgF₂ Coating Typical Transmission

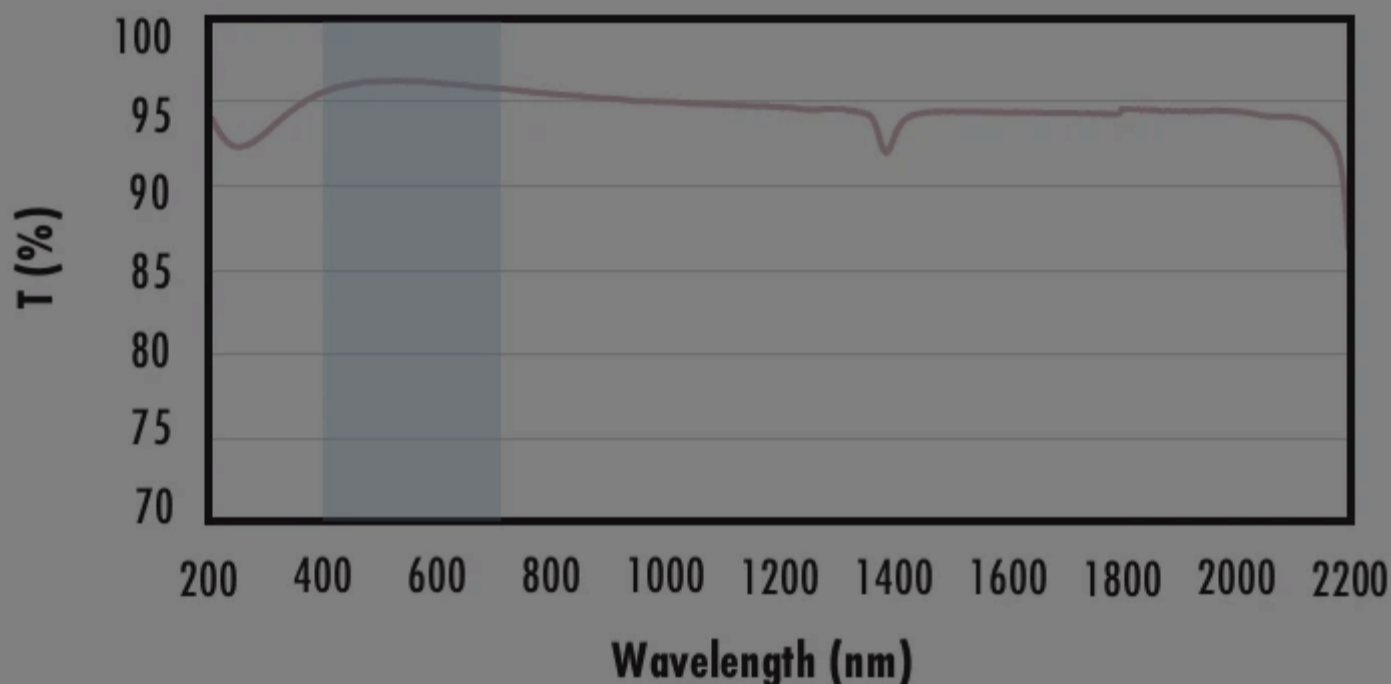

Typical transmission of a 3mm thick fused silica window with MgF₂ (400-700nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 1.75\% \text{ @ } 400 - 700\text{nm (N-BK7)}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

Fused Silica with UV-AR Coating Typical Transmission

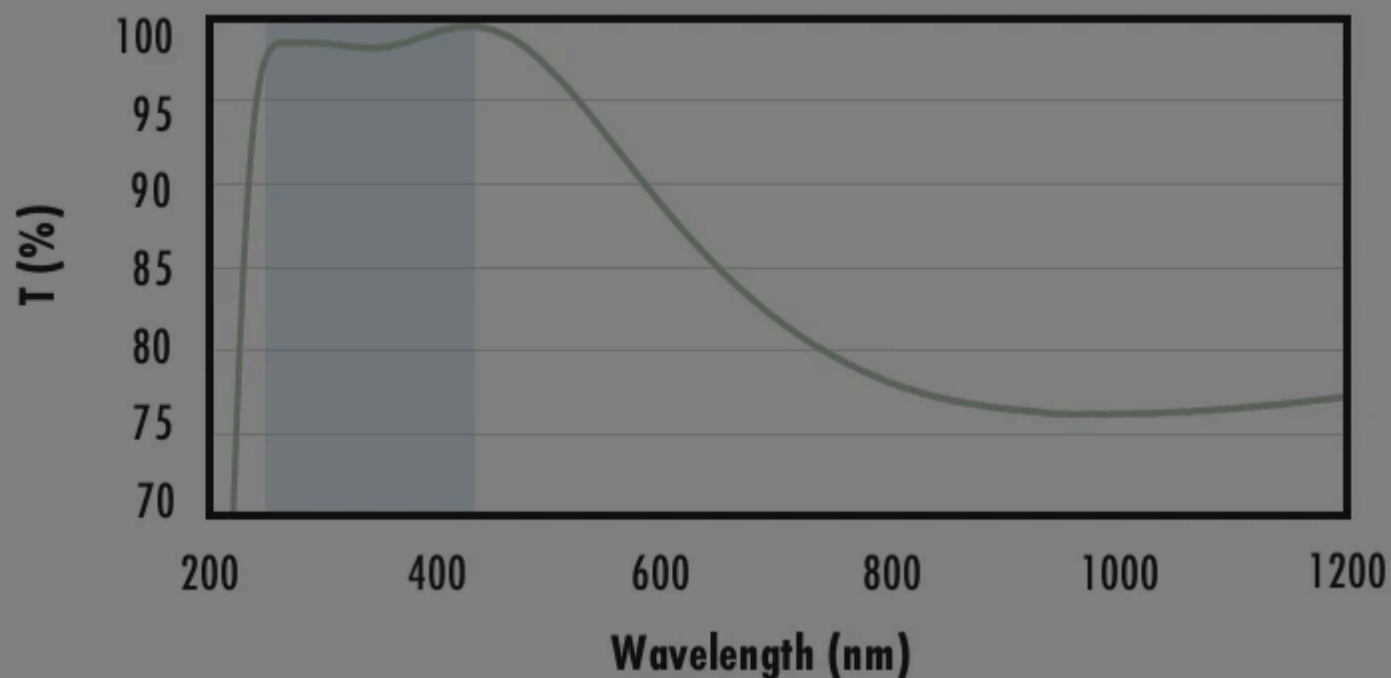

Typical transmission of a 3mm thick fused silica window with UV-AR (250-425nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{abs} \leq 1.0\% \text{ @ } 250 - 425\text{nm}$$

$$R_{avg} \leq 0.75\% \text{ @ } 250 - 425\text{nm}$$

$$R_{avg} \leq 0.5\% \text{ @ } 370 - 420\text{nm}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

Fused Silica with UV-VIS Coating Typical Transmission



Typical transmission of a 3mm thick fused silica window with UV-VIS (250-700nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:


$$R_{abs} \leq 1.0\% \text{ @ } 350 - 450\text{nm}$$

$$R_{avg} \leq 1.5\% \text{ @ } 250 - 700\text{nm}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

Fused Silica with VIS-EXT Coating Typical Transmission

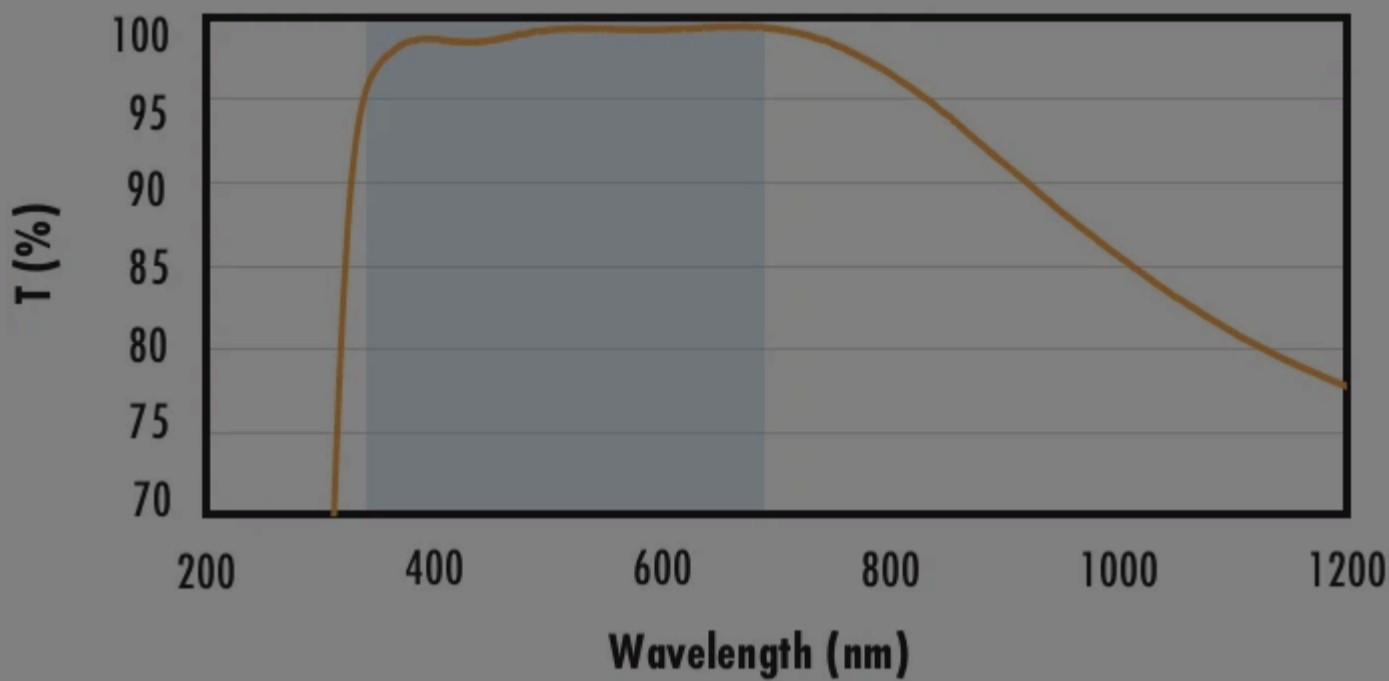

Typical transmission of a 3mm thick fused silica window with VIS-EXT (350-700nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 0.5\% \text{ @ } 350 - 700\text{nm}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

Fused Silica with VIS-NIR Coating Typical Transmission

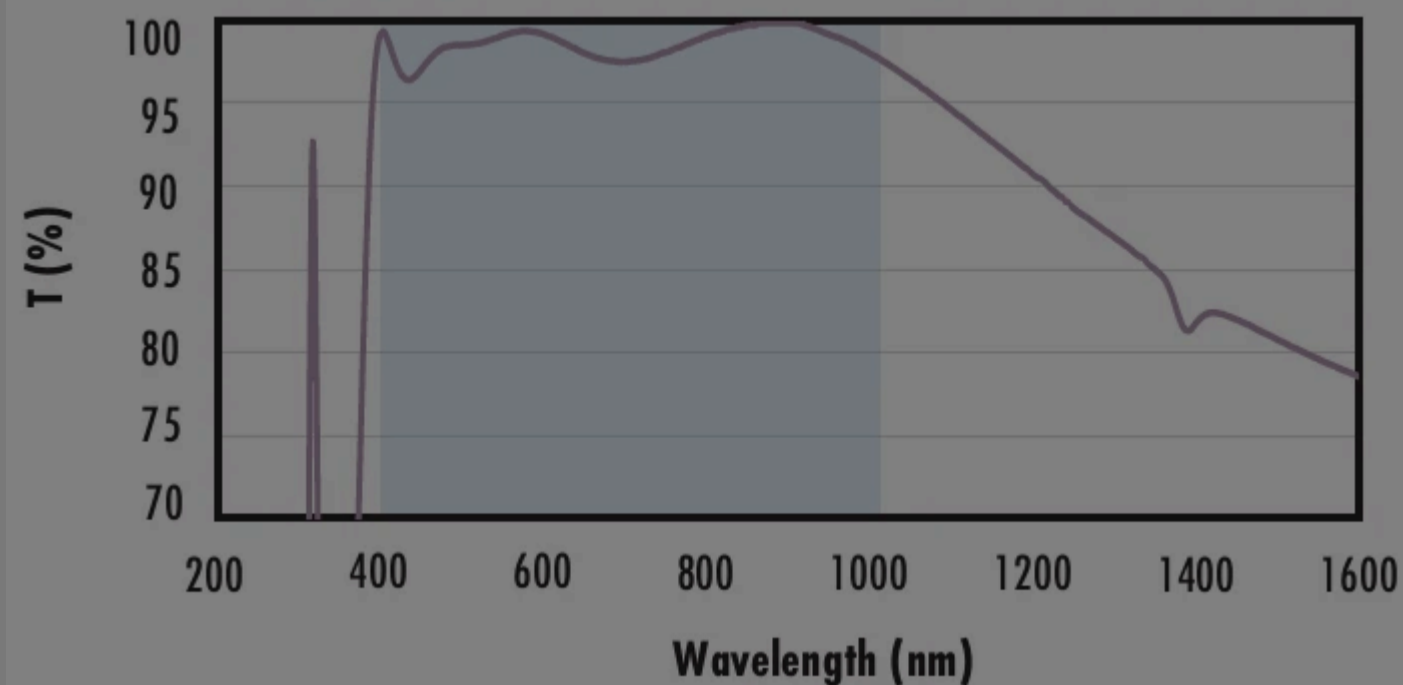

Typical transmission of a 3mm thick fused silica window with VIS-NIR (400-1000nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{abs} \leq 0.25\% \text{ @ } 880\text{nm}$$


$$R_{avg} \leq 1.25\% \text{ @ } 400 - 870\text{nm}$$

$$R_{avg} \leq 1.25\% \text{ @ } 890 - 1000\text{nm}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

Fused Silica with VIS 0° Coating Typical Transmission

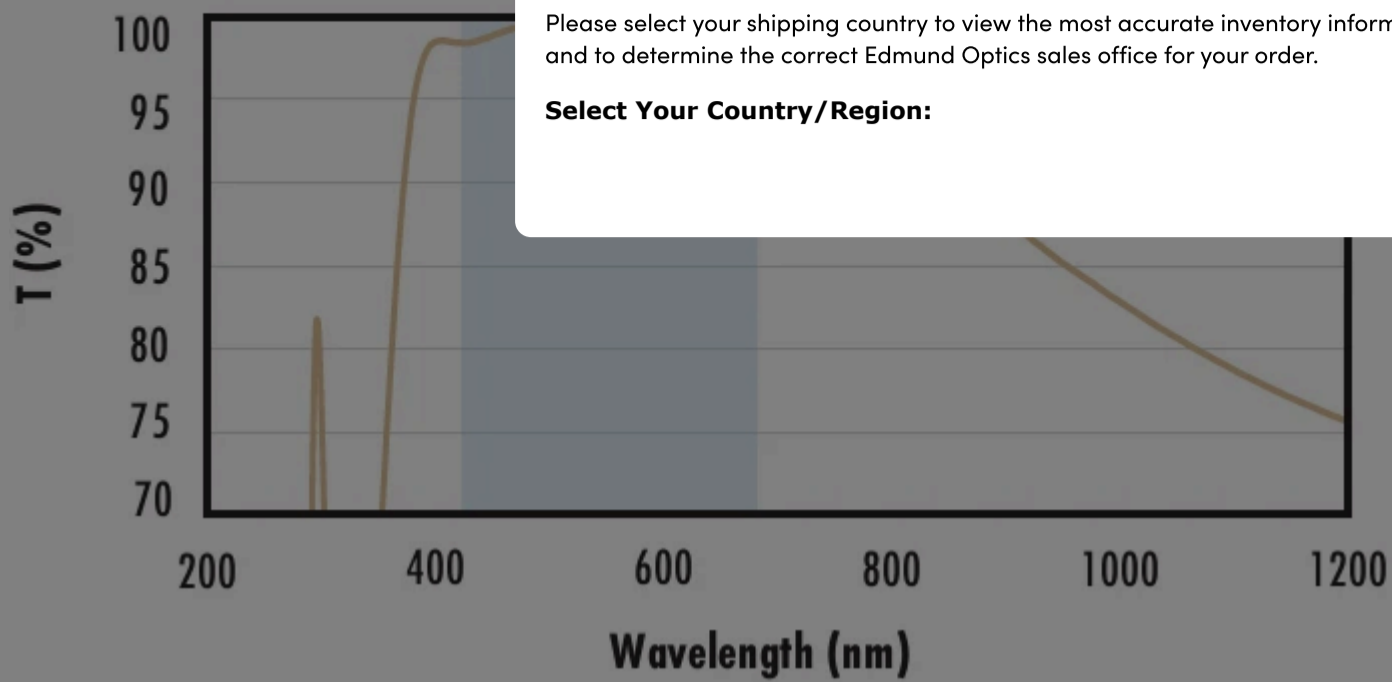

Typical transmission of a 3mm thick fused silica window with VIS 0° (425–675nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 0.4\% @ 425 - 675nm$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

Fused Silica with YAG-BBAR Coating Typical Transmission

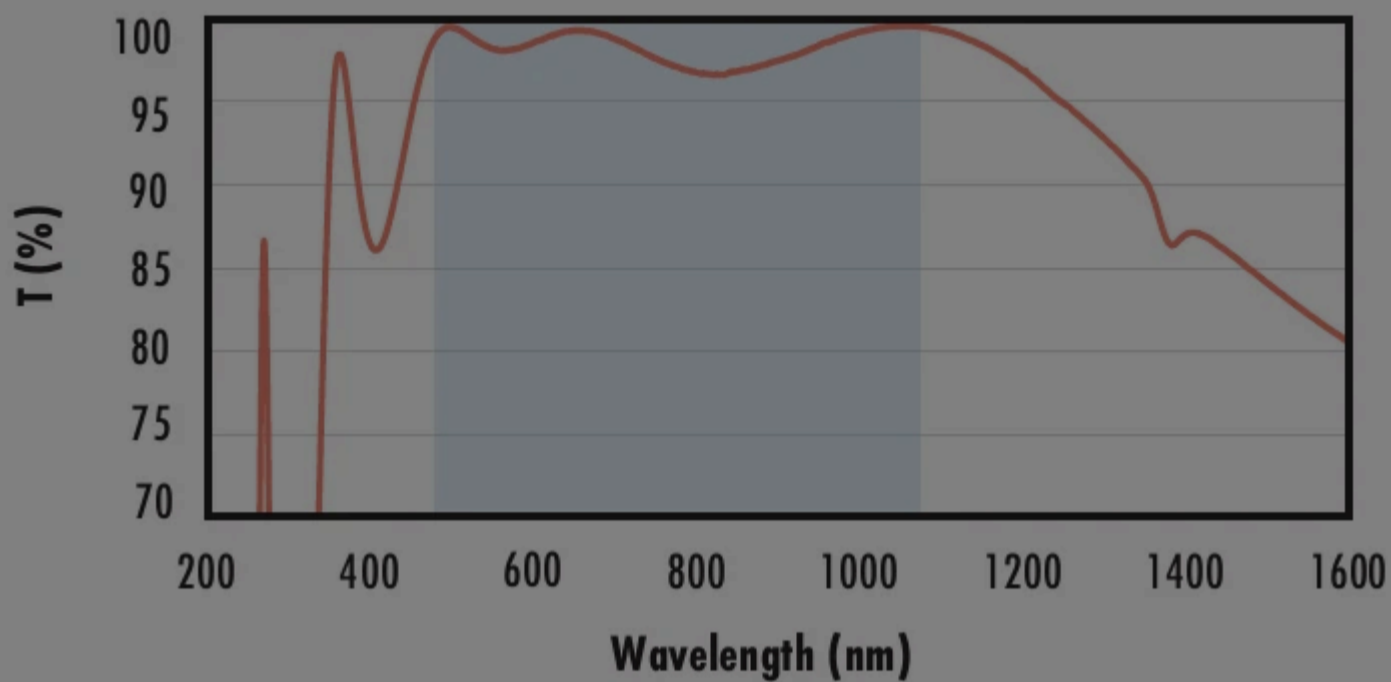

Typical transmission of a 3mm thick fused silica window with YAG-BBAR (500–1100nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{abs} \leq 0.25\% @ 532nm$$


$$R_{abs} \leq 0.25\% @ 1064nm$$

$$R_{avg} \leq 1.0\% @ 500 - 1100nm$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

Fused Silica with NIR I Coating Typical Transmission

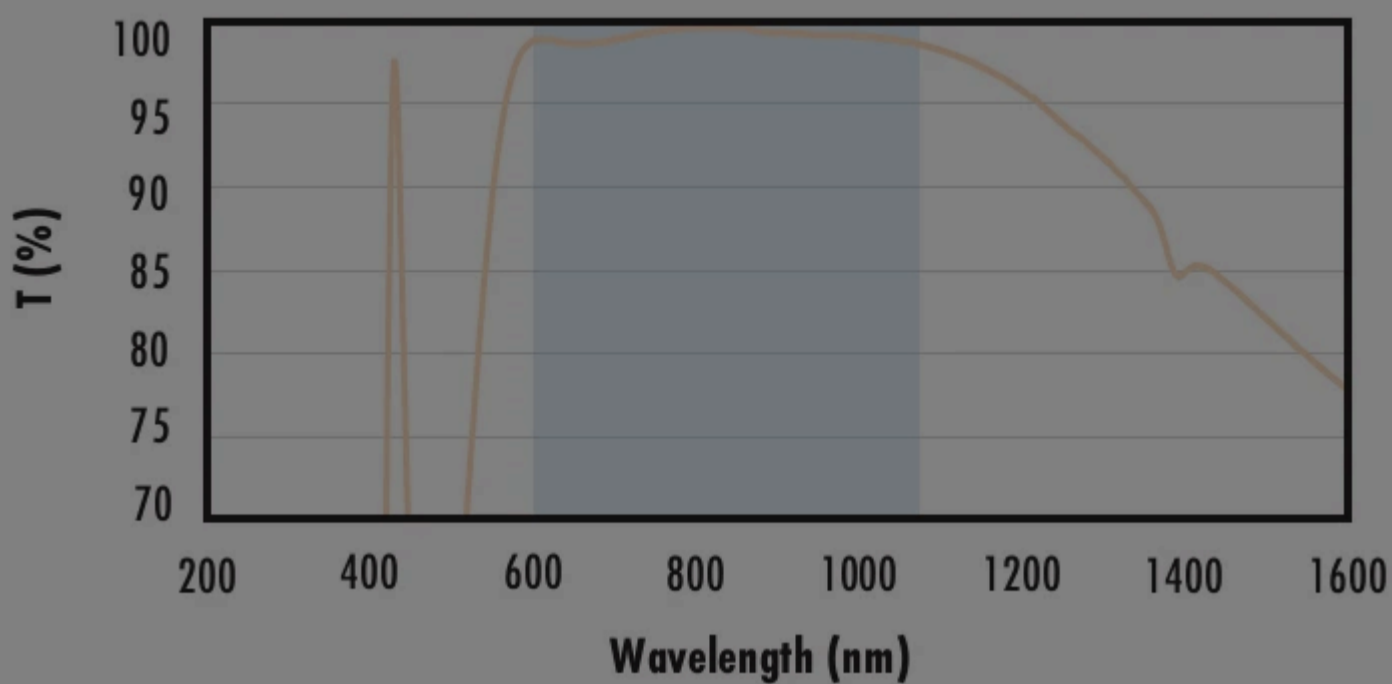

Typical transmission of a 3mm thick fused silica window with NIR I (600 – 1050nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 0.5\% @ 600 - 1050nm$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

Fused Silica with NIR II Coating Typical Transmission

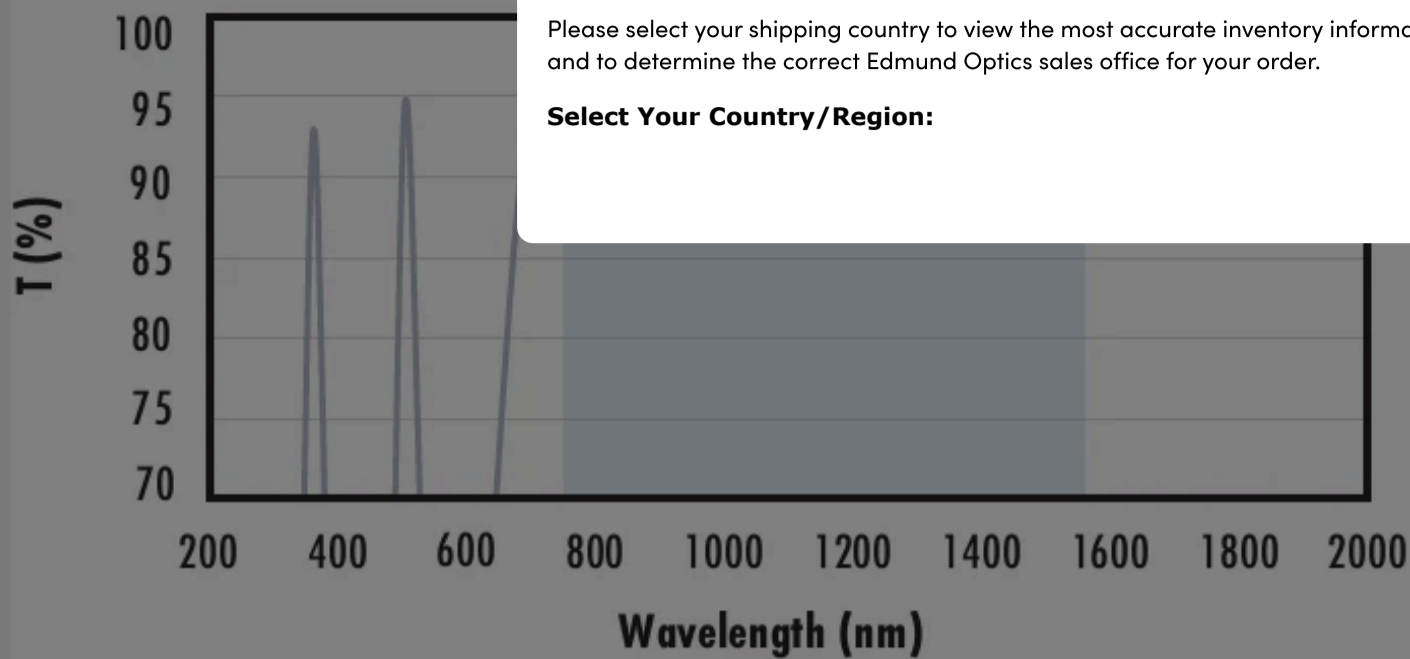

Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.

Select Your Country/Region:

Typical transmission of a 3mm thick fused silica window with NIR II (750 - 1550nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

- $R_{abs} \leq 1.5\%$ @ 750 - 800nm
- $R_{abs} \leq 1.0\%$ @ 800 - 1550nm
- $R_{avg} \leq 0.7\%$ @ 750 - 1550nm

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

Related Products




Cage System Optical Lens Mounts



C, S, and T-Mount Circular Optic Mounts



PUROSOL™ Optical Cleaner

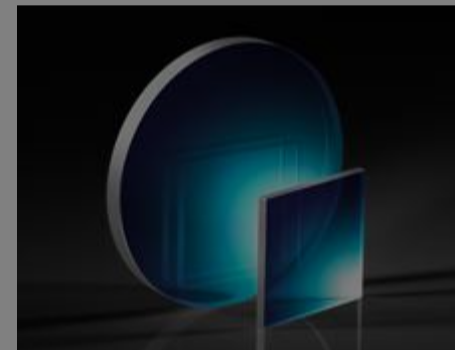


λ/10 UV Fused Silica Windows

Frequently Purchased Together



#32-489 - 25mm Dia. x 25mm FL Uncoated, Double-Convex Lens
€36,50

Qty

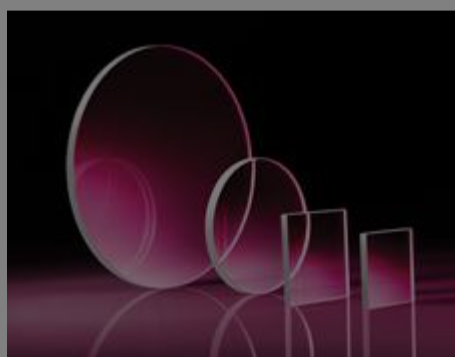

#32-949 - 15mm Diameter MgF₂ Coated, B270 Window
€41,50

Qty



#33-393 - 12mm Dia. x 24mm FL, NIR II Coated, Double-Convex Lens
€48,50

Qty























#39-730 - 1000µm Aperture Diameter, Unmounted, Precision Pinhole
€72,50

Qty



Compatible Mounts

	Title	Type	Compare	Stock Number	Price	Buy
MORE+	30.0mm Optic Dia., Optic Mount	Fixed		#64-563	€32,75 Request Quote	11 In Stock <input type="text" value="1"/>

	Title	Type	Compare	Stock Number	Price	Buy
MORE+	 30.0mm Optic Dia., Optic Mount				€32,75	CONTACT US <input type="text" value="1"/> 
MORE+	 2.0 - 35.0mm Optic Dia., Three-Screw Adjustable Mount					20+ In Stock <input type="text" value="1"/> 
MORE+	 9.5 - 73.0mm Optic Dia., Three-Screw Adjustable Ring Mount	Fixed		#36-605	€83,00 Request Quote	20+ In Stock <input type="text" value="1"/> 
MORE+	 7.0 - 40.0mm Optic Height, English Bar-Type Optic Holder	Fixed		#03-676	€106,00 Request Quote	20+ In Stock <input type="text" value="1"/> 
MORE+	 10.0 - 60.0mm Optic Height, Metric Bar-Type Optic Holder	Fixed		#55-530	€108,00 Request Quote	CONTACT US <input type="text" value="1"/> 
MORE+	 19.5 - 108.0mm Optic Dia., Three-Screw Adjustable Ring Mount	Fixed		#03-670	€114,00 Request Quote	20+ In Stock <input type="text" value="1"/> 
MORE+	 7.0 - 67.0mm Optic Height, English Bar-Type Optic Holder	Fixed		#03-669	€116,00 Request Quote	20+ In Stock <input type="text" value="1"/> 
MORE+	 8.0 - 118.0mm Optic Height, English Bar-Type Optic Holder	Fixed		#03-666	€120,00 Request Quote	20+ In Stock <input type="text" value="1"/> 
MORE+	 4.0 - 36.0mm Optic Dia., Self-Centering Jaw Clamp	Fixed		#16-077	€157,00 Request Quote	5 In Stock <input type="text" value="1"/> 
MORE+	 5.0 - 100.0mm Optic Dia., Self-Centering Jaw Clamp	Fixed		#16-078	€410,00 Request Quote	CONTACT US <input type="text" value="1"/> 

Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.

Select Your Country/Region:

Check out our full selection of mounts [here](#).

Resources

Media Type

- Application Note
- Technical Tool
- Video
- Glossary
- FAQ

APPLICATION NOTE

Anti-Reflection (AR) Coatings

APPLICATION NOTE

An Introduction to Optical Coatings

TECHNICAL TOOL

Beam Displacement Calculator

APPLICATION NOTE

UV vs. IR
Grade Fused

APPLICATION NOTE

Understanding
Optical

VIDEO

Optical
Windows
Review

Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.

Select Your Country/Region:

[View More](#)