TECHSPEC 35mm 780nm, Laser Line Polarizing Cube Beamsplitter

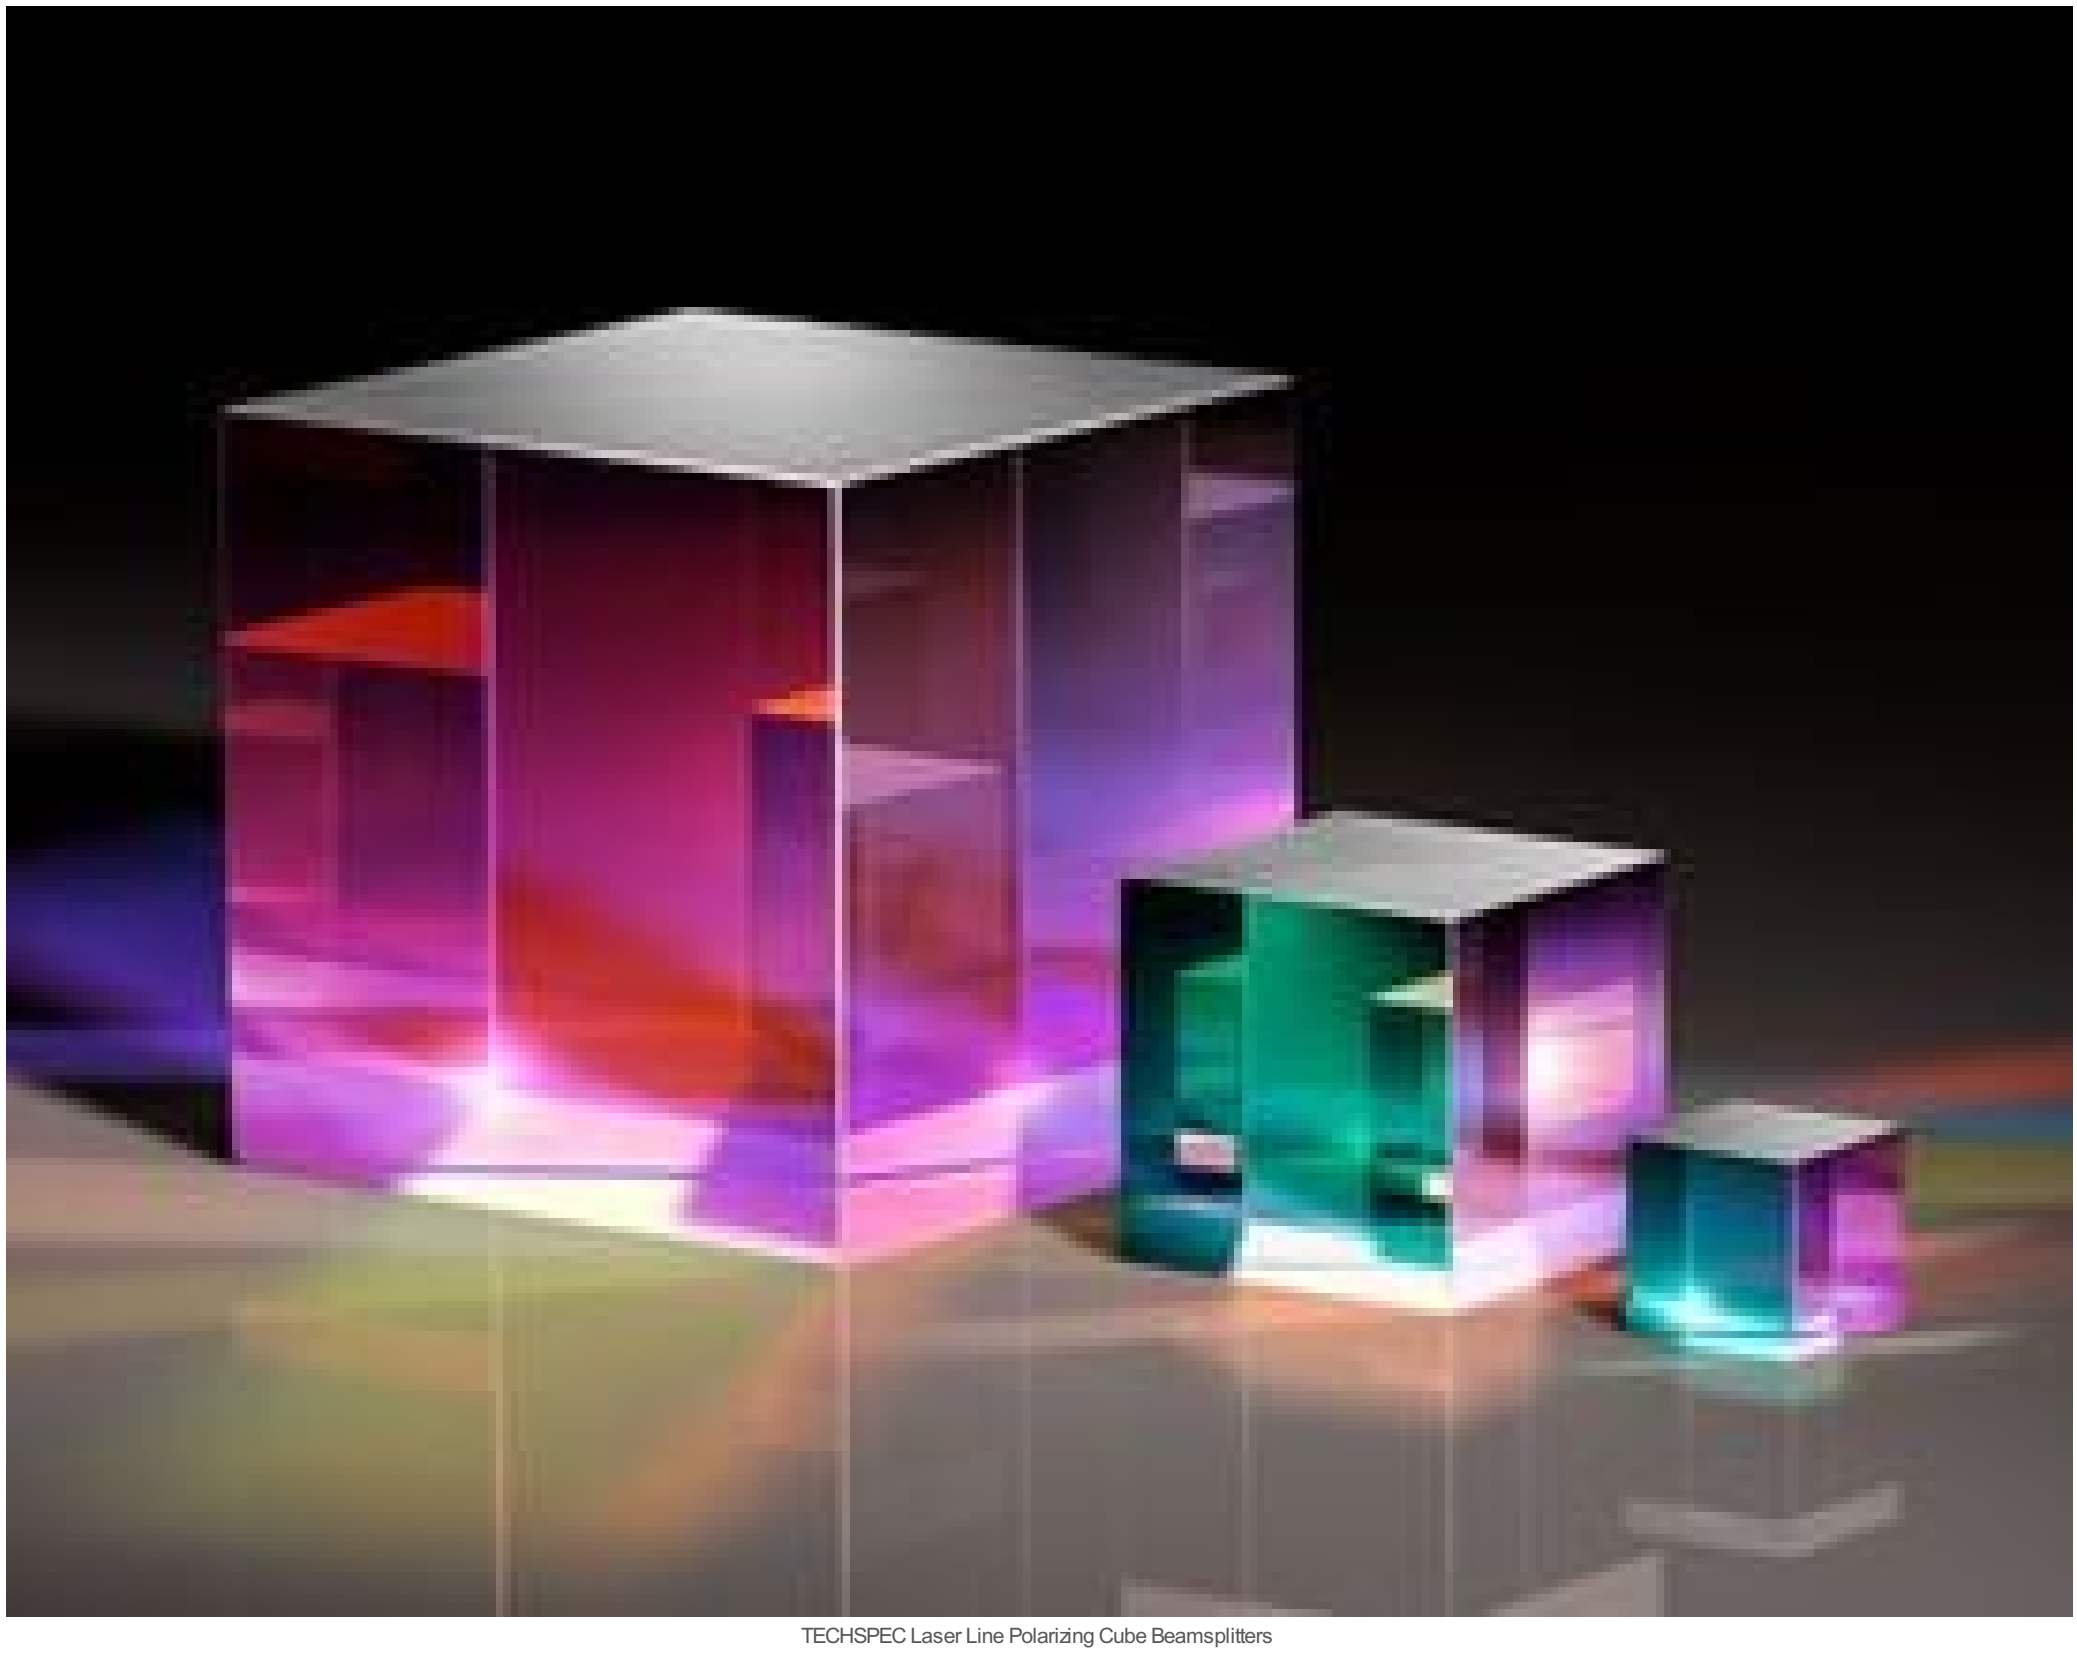

TECHSPEC Laser Line Polarizing Cube Beamsplitters

Stock **#47-569** **11 In Stock**

- 1 + **€460**.41

ADD TO CART

Volume Pricing	
Qty 1-5	**€460,41** each
Qty 6-25	**€372,86** each
Qty 26-99	**€338,87** each
Need More?	Request Quote

Prices shown are exclusive of VAT/local taxes

Product Downloads

SPECIFICATIONS

General

Type:	Linear Polarizer

Physical & Mechanical Properties

Bevel:
Protective as needed

Clear Aperture (%):
90.00

Construction:
Cube

Dimensions (mm):
35.0 x 35.0 x 35.0 ±0.1

Optical Properties

Beam Deviation (arcmin):
±3

Coating Specification:
R_{abs} <0.25% @ 780nm

Design Wavelength DWL (nm):
780

Extinction Ratio:
1000:1

P-Polarization Transmission (%):
>95

S-Polarization Reflection (%):
>99.5

Substrate:
N-BK7

Surface Quality:
40-20

Power (fringes) @ 632.8nm:
1.25

Irregularity (fringes) @ 632.8nm:
0.25

Regulatory Compliance

RoHS 2015:
Compliant

Reach 219:
Compliant

Certificate of Conformance:
View

PRODUCT DETAILS

- Designed for Common Diode, Gas, and Solid State Lasers
- Reflects S-Polarized Light, Transmits P-Polarized Light
- High Extinction Ratio

TECHSPEC® Laser Line Polarizing Cube Beamsplitters split randomly polarized beams into two orthogonal, linearly polarized components. S-polarized light is reflected at a 90° angle, while P-polarized light is transmitted. The beamsplitters consist of a pair of precision right angle prisms cemented together to minimize transmitted wavefront distortion, and to provide excellent parallelism between incoming and transmitted beams. TECHSPEC® Laser Line Polarizing Cube Beamsplitters are designed for many common laser wavelengths and have a high extinction ratio. These beamsplitters are designed for common diode, gas, and solid-state laser applications.

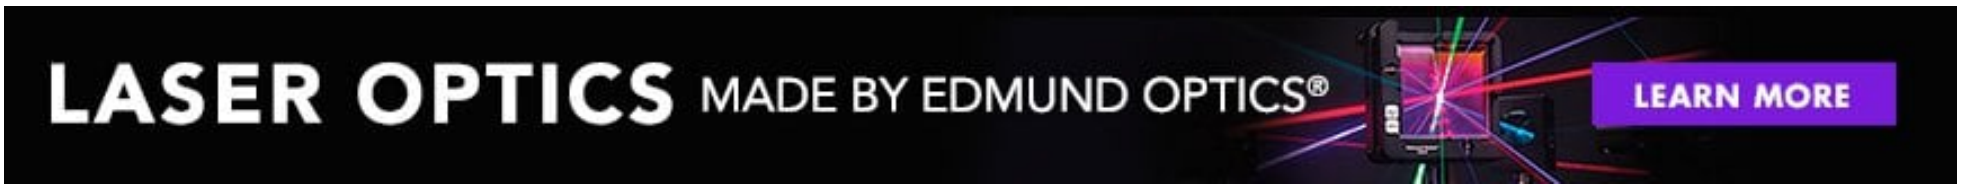

TECHNICAL INFORMATION

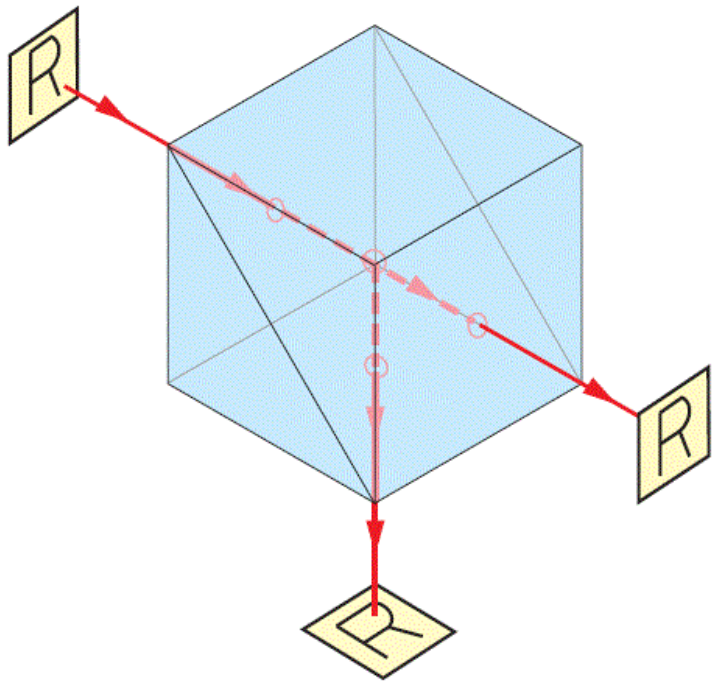
R
R
R