


[See all 1 Products in Family](#)

38.1mm Dia., 6mm Thick, Uncoated, ISP Optics Calcium Fluoride (CaF₂) Window | CF-W-38-6

See More by [ISP Optics](#)

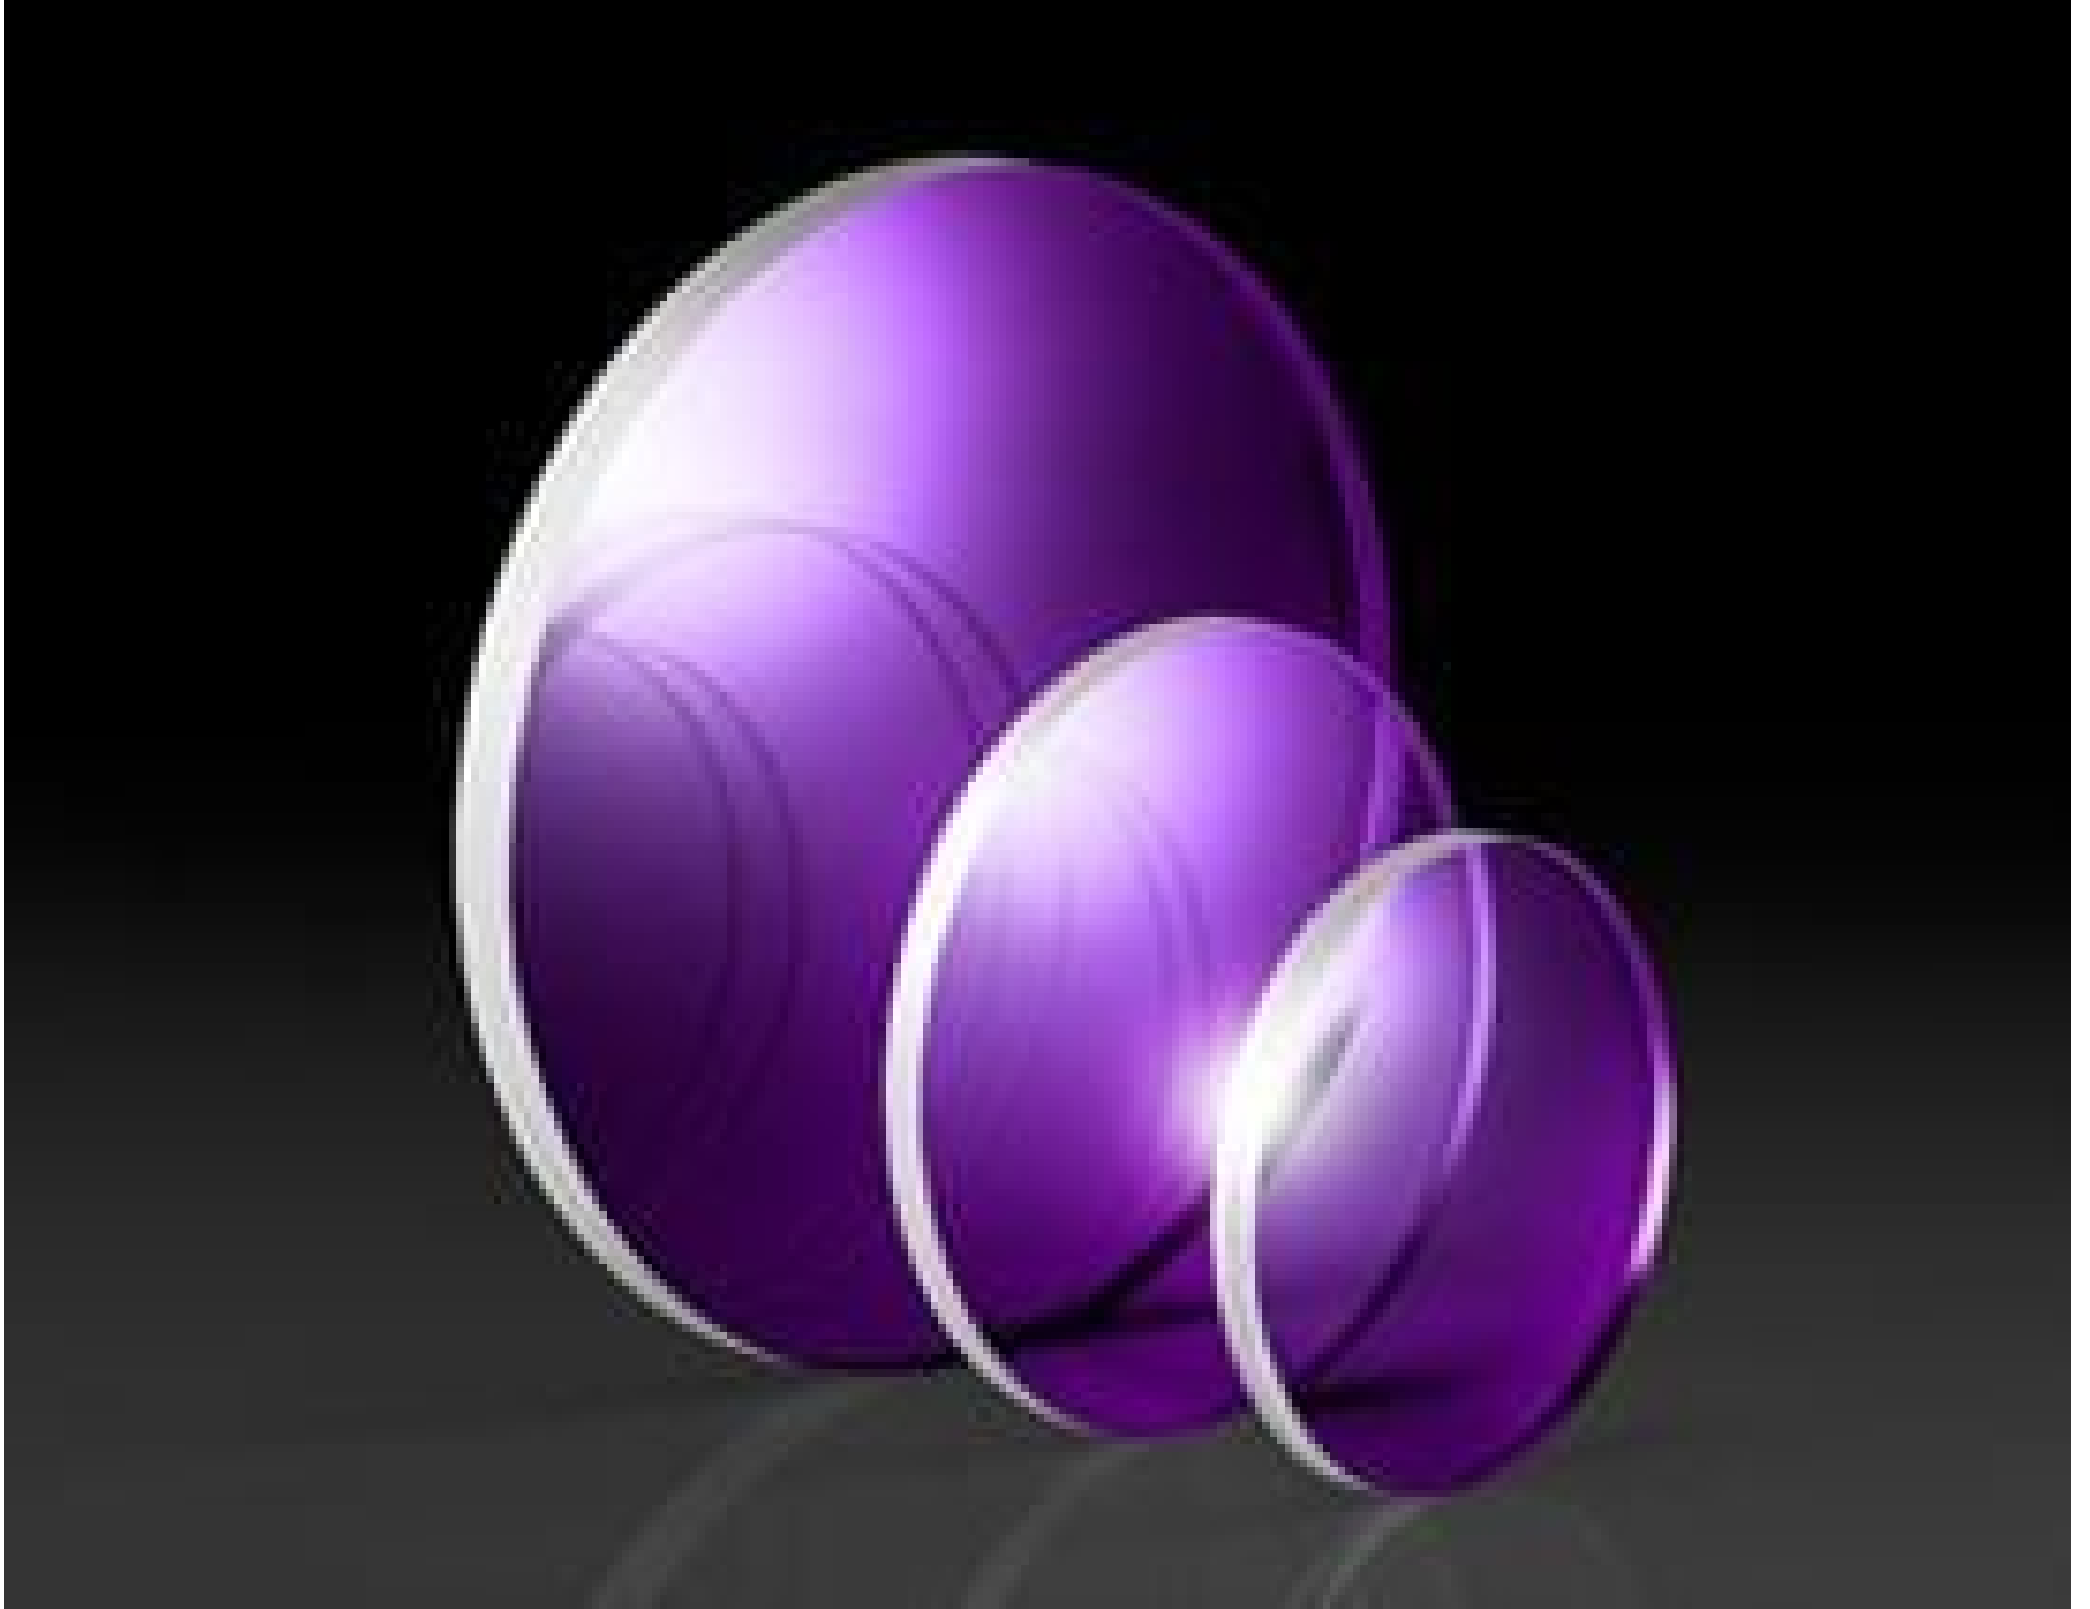

Stock #24-525 **CLEARANCE** 2 In Stock

− 1 + €99.⁰⁰

ADD TO CART

Volume Pricing	
Qty 1+	€99,00 each
Need More?	Request Quote

Prices shown are exclusive of VAT/local taxes

Product Downloads

General

CF-W-38-6 **Model Number:**

Protective Window **Type:**

Type of Window:

Physical & Mechanical Properties

32.38 **Clear Aperture CA (mm):**

38.10 +0.00/-0.13 **Diameter (mm):**

6.00 ±0.13 **Thickness (mm):**

<3 **Parallelism (arcmin):**

Protective as needed **Bevel:**

85 **Clear Aperture (%):**

Fine Ground **Edges:**

0.26 **Poisson's Ratio:**

75.8 **Young's Modulus (GPa):**

158.30 **Knoop Hardness (kg/mm²):**

Optical Properties

Uncoated **Coating:**

[Calcium Fluoride \(CaF₂\)](#) **Substrate:**

1.434 **Index of Refraction (n_d):**

40-20 **Surface Quality:**

94.99 **Abbe Number (v_d):**

Random **Axis Orientation:**

300 - 8000 **Wavelength Range (nm):**

2λ **Surface Flatness (P-V):**

Material Properties

3.18 **Density (g/cm³):**

18.85 **Coefficient of Thermal Expansion CTE (10⁻⁶/°C):**

Regulatory Compliance

[Compliant](#) **RoHS 2015:**

[View](#) **Certificate of Conformance:**

[Compliant](#) **Reach 240:**

Product Details

- Greater than 90% Transmission from 350nm-7μm
- Low Index of Refraction
- Low Solubility and Chemically Inert

ISP Optics Calcium Fluoride (CaF₂) Windows provide environmental protection for electronic systems and sensors across the IR spectrum. Calcium Fluoride features greater than 90% transmission from 350nm to 7μm and a low refractive index, allowing it to be used without an anti-reflection (AR) coating. These windows are fabricated with IR Grade Calcium Fluoride, featuring low absorption and a high damage threshold in the infrared spectrum. ISP Optics Calcium Fluoride (CaF₂) Windows offer low solubility and superior hardness compared to other fluoride-based substrates, making them ideal for applications featuring harsh environments including infrared spectroscopy systems and thermal imaging.

Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools

;