



[See all 3 Products in Family](#)

# 38.1mm Dia., 6mm Thick, Uncoated, ISP Optics Calcium Fluoride (CaF<sub>2</sub>) Window | CF-W-38-6

See More by [ISP Optics](#)

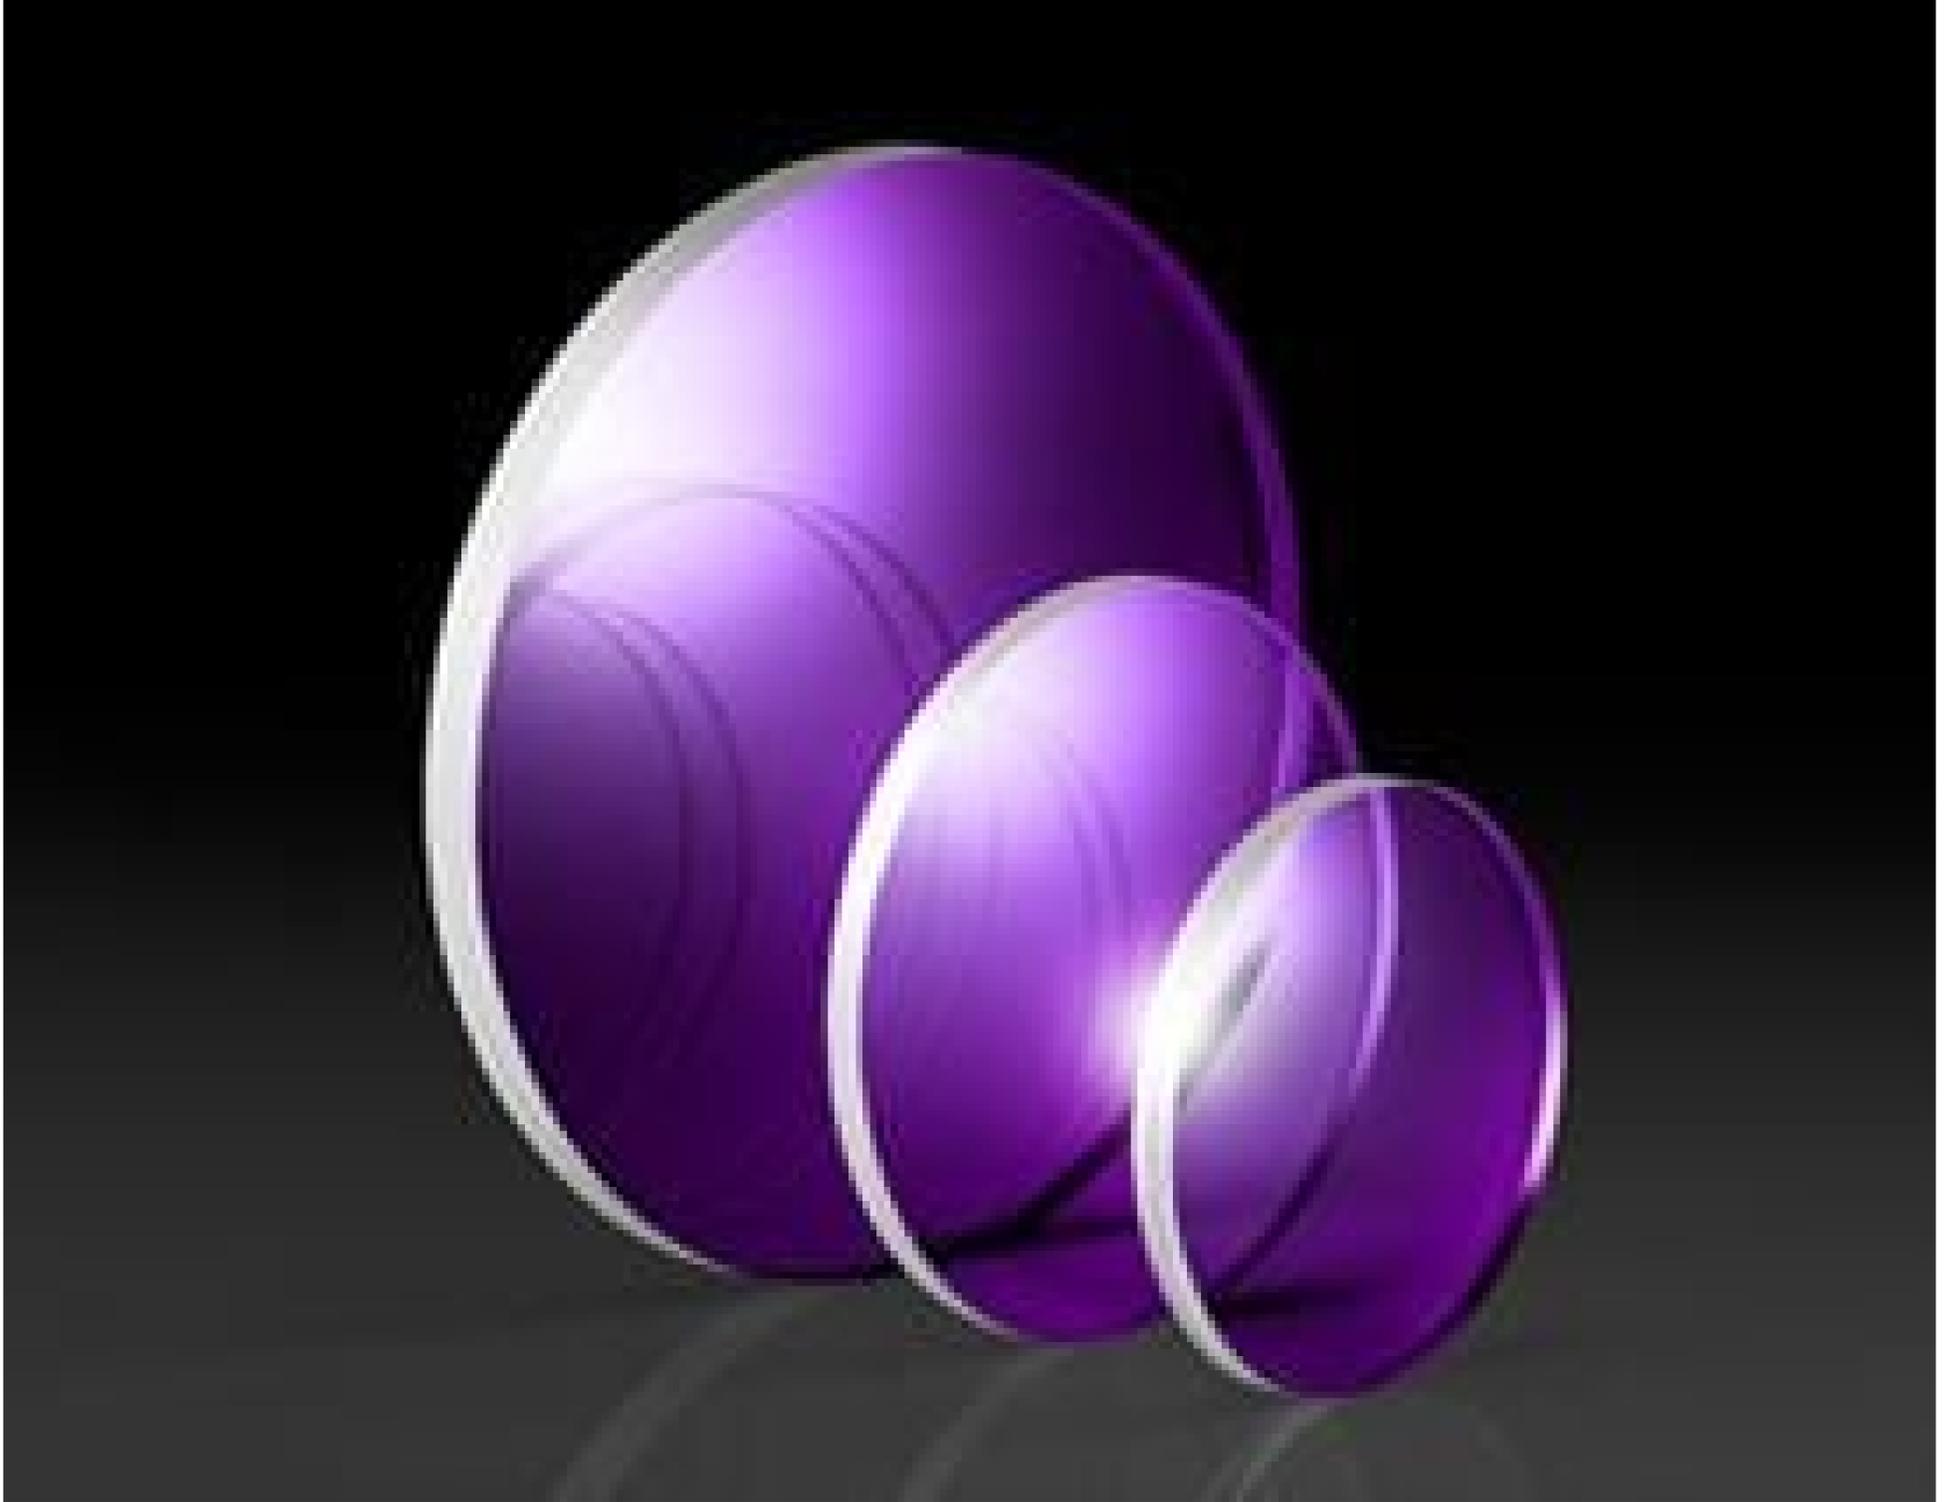

Stock #24-525 **CLEARANCE** 2 In Stock

− 1 + €99.<sup>00</sup>

**ADD TO CART**

Volume Pricing	
Qty 1+	€99,00 each
Need More?	<a href="#">Request Quote</a>

Prices shown are exclusive of VAT/local taxes

## Product Downloads

### General

CF-W-38-6 **Model Number:**  
Protective Window **Type:**

## Physical & Mechanical Properties

32.38	Clear Aperture CA (mm):
38.10 +0.00/-0.13	Diameter (mm):
6.00 ±0.13	Thickness (mm):
<3	Parallelism (arcmin):
Protective as needed	Bevel:
85	Clear Aperture (%):
Fine Ground	Edges:
0.26	Poisson's Ratio:
75.8	Young's Modulus (GPa):
158.30	Knoop Hardness (kg/mm <sup>2</sup> ):

## Optical Properties

Uncoated	Coating:
Calcium Fluoride (CaF <sub>2</sub> )	Substrate: <input type="checkbox"/>
1.434	Index of Refraction (n <sub>d</sub> ):
40-20	Surface Quality:
94.99	Abbe Number (v <sub>d</sub> ):
Random	Axis Orientation:
300 - 8000	Wavelength Range (nm):
2λ	Surface Flatness (P-V):

## Material Properties

3.18	Density (g/cm <sup>3</sup> ):
18.85	Coefficient of Thermal Expansion CTE (10 <sup>-6</sup> /°C):

## Regulatory Compliance

Compliant	RoHS 2015:
View	Certificate of Conformance:
Compliant	Reach 240:

## Product Details

- Greater than 90% Transmission from 350nm-7μm
- Low Index of Refraction
- Low Solubility and Chemically Inert

ISP Optics Calcium Fluoride (CaF<sub>2</sub>) Windows provide environmental protection for electronic systems and sensors across the IR spectrum. Calcium Fluoride features greater than 90% transmission from 350nm to 7μm and a low refractive index, allowing it to be used without an anti-reflection (AR) coating. These windows are fabricated with IR Grade Calcium Fluoride, featuring low absorption and a high damage threshold in the infrared spectrum. ISP Optics Calcium Fluoride (CaF<sub>2</sub>) Windows offer low solubility and superior hardness compared to other fluoride-based substrates, making them ideal for applications featuring harsh environments including infrared spectroscopy systems and thermal imaging.

## Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools

---

;