

[All Products](#) / [Cameras](#) / [Gigabit](#)  
/ [Teledyne FLIR IIS Blackfly S GigE](#)

[See all 54 Products in Family](#)

# BFS-PGE-200S7M-C

See More by [Teledyne FLIR](#)

Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.

Select Your Country/Region: European Union

Submit



Stock #78-549 [CONTACT US](#)

- 1 +

€1.950<sup>,00</sup>

ADD TO CART

Teledyne FLIR® IIS Blackfly® S GigE Cameras



+1

Volume Pricing	
Qty 1+	€1.950,00 each
Need More?	<a href="#">Request Quote</a>

Prices shown are exclusive of VAT/local taxes

### Product Downloads

- Start Up Guide:pdf
- STEP:step IGES:igs
- Spec Sheets:pdf
- eDrawing:eprt [Download All](#)

**Spectrum:** Monochrome

## General

**Type:** Monochrome Camera

**Model Number:** BFS-PGE-200S7M-C

**Manufacturer:** FLIR

**Camera Series:** Blackfly® S

## Physical & Mechanical Properties

**Dimensions (mm):** 29 x 29 x 39 (excludes connectors and lens mount)

**Weight (g):** 53

**Housing:** Full

## Sensor

**Image Buffer:** 240MB

**Sensor Format:** 1.1"

**Resolution (Megapixels):** 20.00

**Frame Rate (fps):** 6.00

**Pixels (H x V):** 4,504 x 4,504

**Pixel Size, H x V (µm):** 2.74 x 2.74

**Sensing Area, H x V (mm):** 12.34 x 12.34

**Imaging Sensor:** Sony IMX541

**Type of Sensor:** Progressive Scan CMOS

**Shutter Type:** Global

**Pixel Depth:** 8/10/12 Bit

**Exposure Time:** 27µs - 30s

**Dynamic Range (dB):** 70.83

**Machine Vision Standard:** GigE Vision v1.2

## Electrical

**Power Consumption (W):** 4.2W

## Hardware & Interface Connectivity

<b>Interface:</b>	GigE (PoE)	<b>Connector:</b>	GigE, RJ45 with Screw Locks
<b>Power Supply:</b>	Power Supply Required and Sold Separately if not using PoE: USA: <a href="#">#88-063</a> Europe: <a href="#">#88-063</a> Japan: <a href="#">#88-063</a> Korea: Not Available China: Not Available	<p>Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.</p> <p><b>Select Your Country/Region:</b></p>	
<b>Synchronization:</b>	Hardware Trigger (GPIO) or Software Trigger	<b>Interface Port Orientation:</b>	Back Panel
<b>GPIO Connector Type:</b>	6-pin Hirose (HR10)		

## Threading & Mounting

<b>Mount:</b>	C-Mount	<b>Mounting Threads:</b>	1/4-20 with Tripod Mount Adapter <a href="#">#15-838</a>
---------------	---------	--------------------------	--

## Environmental & Durability Factors

<b>Operating Temperature (°C):</b>	0 to +50	<b>Storage Temperature (°C):</b>	-30 to +60
------------------------------------	----------	----------------------------------	------------

## Regulatory Compliance

<b>Certificate of Conformance:</b>	<a href="#">View</a>		
------------------------------------	----------------------	--	--

## Product Details

Sony IMX541

- PoE (Power over Ethernet)
- GigE Vision and GenICam Compliant
- Ultra Compact Form Factor
- Extensive API Library and Included Spinnaker SDK



Teledyne  
Authorized  
Distributor

### Teledyne FLIR IIS Blackfly S: Advanced Machine Vision Cameras with powerful features

Capture the images you need from advanced sensors in enclosed or board-level configurations

The **Blackfly® S** is a versatile and compact machine vision camera series that leverages the industry's most advanced area scan sensors in an ultra-compact form factor. It combines powerful features that easily produce the exact images required, accelerating application development. Combining both automatic and precise manual controls over image capture and on-camera pre-processing. With options ranging from high-speed performance, high-resolution images, polarization, or low-light sensitivity, the Blackfly® S series of cameras can deliver the required results.

With the selection of camera variations all sharing the same form factor, it makes it easy to develop once, deploy anywhere. On camera features include IEEE1588 clock synchronization and full compatibility with popular third-party software supporting either GigE Vision or USB3 Vision interfaces. The Blackfly® S is available in GigE, USB3, cased, and board-level versions.

Note: **GigE cable** sold separately and required for operation. Software available for [download](#). **Blackfly® PoE GigE Cameras** are also available.

### Blackfly® S GigE color / monochrome cameras

- On camera features include IEEE1588 clock synchronization and full compatibility with popular third-party software supporting GigE Vision. GigE models featuring Lossless Compression (LLC) are also available with higher maximum frame rates and lower bandwidth requirements, helping maximize output without compromising image quality.

### Features

- Ultra-compact form factor (29mm x 29mm x 39mm)
- Leverage the latest CMOS sensors and new on-camera image processing features
- Harness increased binning flexibility, powerful auto-exposure controls and robust color transformation tools
- Improve cycle time using advanced camera controls and programmable logic
- Utilize sequencer, chunk data, event notification, counters, timers and logic blocks
- Choice of CMOS global shutter, polarization and color filter options
- Data interface options: GigE, USB3
- Color transformation tools for true-to-life
- Advanced auto-algorithms or precise manual control
- On-camera features such as IEEE1588 clock synchronization
- Compatible with third-party software and SDKs
- Support for a wide range of operating systems and host system architectures
- Rich sample code and descriptive API logging
- Simplified product iteration with consistent form factor across sensor sizes
- Camera control via FlyCapture SDK or 3rd-party USB3 Vision software

Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.

**Select Your Country/Region:**

**Applications**

- Intelligent Transportation Systems
- Factory automation
- Bar code reading
- 3D scanning
- Life science instrumentation
- Biometrics kiosk solutions
- Ophthalmoscopy
- Automated optical inspection
- Food & Beverage industry

Teledyne FLIR IIS Blackfly® S PoE GigE Cameras are compact machine vision cameras designed to deliver high image quality in space-constrained inspection and automation systems. They feature Power over Ethernet (PoE) connectivity and are GigE Vision and GenICam-compliant, simplifying cabling while enabling straightforward integration with third-party software and existing GigE-based vision networks. EO's Blackfly S GigE offering also includes on-camera features such as IEEE 1588 clock synchronization, making these cameras well-suited for synchronized multi-camera inspection, robotics, and high-speed production environments. Select models with lossless compression are available to increase effective throughput and frame rate while reducing bandwidth demands without sacrificing image quality.

With a broad range of sensor options, the Blackfly S platform is ideal for automated optical inspection, factory automation, microscopy, 3D scanning, and other imaging tasks that require a balance of compact size, speed, and resolution. Advanced camera controls, robust color transformation tools, and auto-exposure capabilities help users optimize image capture for both color and monochrome applications. The included Spinnaker SDK and extensive API support streamline evaluation, software development, and system integration for OEM and embedded vision designers. For customers building distributed or scalable imaging systems, Blackfly S PoE GigE Cameras offer an efficient combination of compact packaging, flexible interface standards, and machine vision performance.

## Accessories


**Note:** Compatible accessories for individual stock numbers may vary. If unsure about which accessories work with your products, please contact us [here](#).

	Title	Compare	Stock Number	Price	Buy
<b>MORE+</b>	Power Over Ethernet (PoE) Single Port injector		#68-469	€66,00 <a href="#">Request Quote</a>	2 In Stock <input type="text" value="1"/>
<b>MORE+</b>	5mm Spacer to convert CS-Mount Cameras to C-Mount		#03-618	€29,00 <a href="#">Request Quote</a>	20+ In Stock <input type="text" value="1"/>
<b>MORE+</b>	GigE PCIe 2.1x4 2 Port Interface Card with PoE		#19-400	€187,00 <a href="#">Request Quote</a>	8 In Stock <input type="text" value="1"/>
<b>MORE+</b>	Blackfly S (39mm) ¼-20 Tripod Adapter		#15-838	€38,00 <a href="#">Request Quote</a>	4 In Stock <input type="text" value="1"/>
<b>MORE+</b>	Cat 6 GigE Cable with Locking Screws, 5m		#86-785	€62,00 <a href="#">Request Quote</a>	CONTACT US <input type="text" value="1"/>
<b>MORE+</b>	Blackfly S/Blackfly 6-pin GPIO Hirose Connector Cable, 1m		#88-064	€38,00 <a href="#">Request Quote</a>	5 In Stock <input type="text" value="1"/>
<b>MORE+</b>	Blackfly S/Blackfly 6-pin GPIO Hirose Connector Cable, 4.5m		#88-065	€44,00 <a href="#">Request Quote</a>	CONTACT US <input type="text" value="1"/>
<b>MORE+</b>	Hirose HR10 Connector, 6-pin		#88-066	€25,00 <a href="#">Request Quote</a>	3 In Stock <input type="text" value="1"/>
<b>MORE+</b>	12 V Power Supply, 6-pin Connector		#88-063	€75,00 <a href="#">Request Quote</a>	20+ In Stock <input type="text" value="1"/>
<b>MORE+</b>	Blackfly S (30mm) ¼-20 Tripod Adapter		#88-210	€12,00 <a href="#">Request Quote</a>	CONTACT US <input type="text" value="1"/>

## Related Products

Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.

**Select Your Country/Region:**

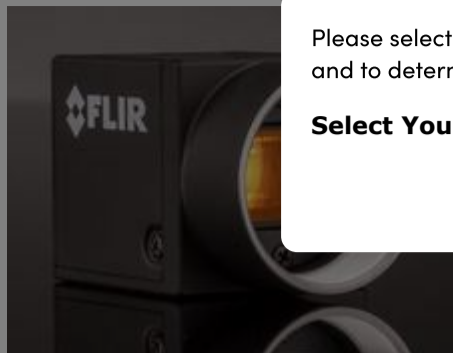

Teledyne FLIR IIS Blackfly S USB  
3.1 Cameras



Teledyne FLIR IIS Blackfly®  
GigE Cameras



Teledyne FLIR IIS Blackfly® USB  
3.0 Cameras

## Imaging Lens Selector

 Imaging

- Factory Automation**
- Telecentric**
- M12**

- Custom Sensor**
- Camera Model**

**Number of Horizontal  
Pixels:**

1

**Number of Vertical  
Pixels:**

2

**Pixel Size (µm):**


3

**Working Distance (mm):**

4

**Horizontal Field of View  
(mm):**

5



**Disclaimer: Values represent theoretical values from lens design software. Actual lens performance varies due to manufacturing tolerances.**

Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.

**Select Your Country/Region:**



#36-511 - 16mm f/1.8, HPr Series  
Fixed Focal Length Lens  
€875,00

Qty  




## Resources

## Media Type

- Application Note
- Video
- Published Article
- FAQ
- Glossary
- Technical Tool

Please select your shipping country to view the most accurate inventory information, and to determine the correct Edmund Optics sales office for your order.


**Select Your Country/Region:**



Limitations

Basics of Digital...

**APPLICATION NOTE**  
Imaging Electronics 101: Camera Resolution fo...



**APPLICATION NOTE**  
Imaging Electronics 101: Understandi...



**VIDEO**  
How Do Cameras Work?



**PUBLISHED ARTICLE**  
Advancements in Short Wave Infrared Sensors

[View More](#)