


Coherent® OBIS™ FP 1254566 | 552nm LS 60mW Laser, Fiber Pigtail, FC

See More by [Coherent®](#)



Coherent® High Performance OBIS™ Fiber-Pigtailed Laser Systems

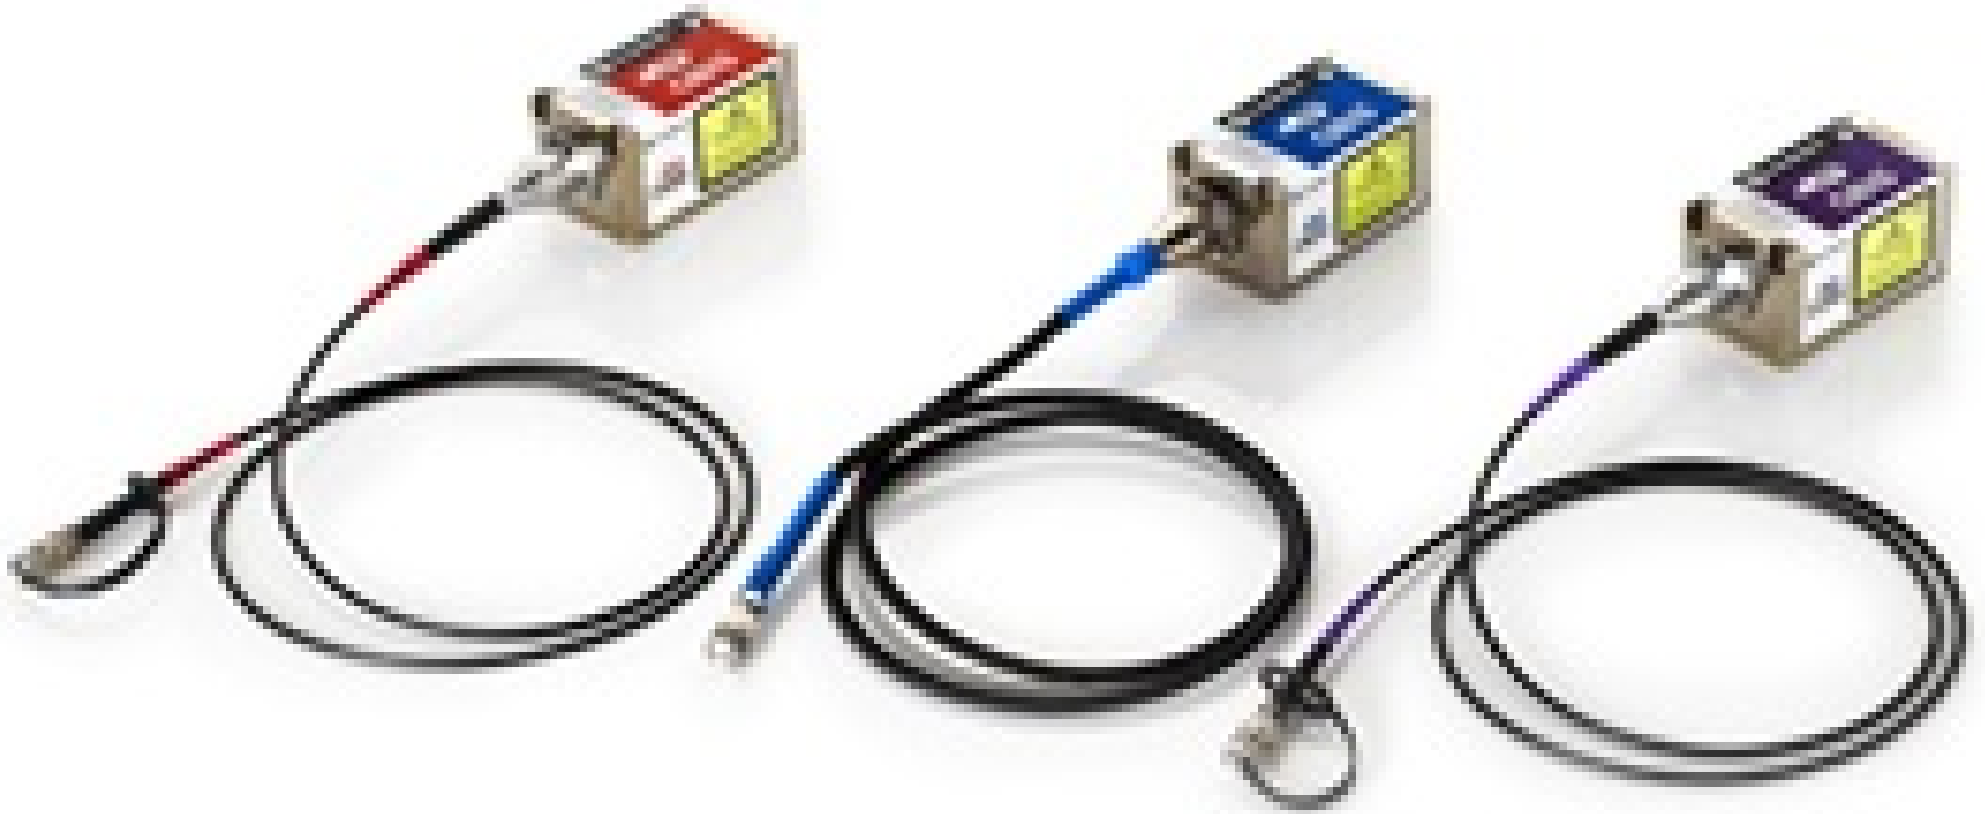

Stock #12-377 [CONTACT US](#)

- 1 + €11.812⁵⁰

ADD TO CART

Volume Pricing	
Qty 1+	€11.812,50 each
Need More?	Request Quote

ⓘ Prices shown are exclusive of VAT/local taxes

Product Downloads



SPECIFICATIONS

General

Warm-Up Time (minutes):

<5

5mm Protective Tubing	Fiber Cable Type:
Coherent®	Manufacturer:
Diode	Type of Laser:
IIIb	Laser Class - CDRH:
1254566	Model Number:

Optical Properties

100:1	Polarization:
TEM ₀₀	Spatial Mode:
552.00 ±2	Wavelength (nm):
≤1.1	Mode Quality, M²:
Green-Yellow	Color:
0.06	Fiber Numerical Aperture NA (1/e²):

Electrical

60	Output Power (mW):
<2	Power Stability (%):
Digital: 0.05	Modulation Frequency (MHz):
Analog: 100	Modulation Frequency (kHz):
≤0.25% (20Hz to 20MHz)	RMS Noise:

Hardware & Interface Connectivity

Power Supply Required and Sold Separately. USA: #87-473 Europe: #87-473 Japan: #87-473 Korea: #87-473 China: #87-473	Power Supply:
FC/APC; 8° angled	Output from Fiber:
Fiber-Coupled	Output Type:

Environmental & Durability Factors

15 to 40	Operating Temperature (°C):
----------	------------------------------------

Regulatory Compliance

Exempt	RoHS 2015:
Contains SVHC(s)	Reach 224:
View	Certificate of Conformance:

PRODUCT DETAILS

- High Performance OBIS™ LX/LS Lasers with Added Fiber Optic Capability
- Permanent Fiber Attachment Extends Lifetime with Guaranteed Power
- Single-Mode Polarization-Maintaining Fiber with an FC/APC Connector Provide High-Quality and Low-Noise Laser Beam Output
- [Coherent® High Performance OBIS™ LX/LS Laser Systems](#) Also Available

Coherent® High Performance OBIS™ LX/LS Fiber-Pigtailed Laser Systems are plug-and-play lasers available in wavelengths from the ultraviolet to the near-infrared with an added fiber attachment. The fiber optic is permanently attached to the laser, providing an extended lifetime of the fiber and guaranteed power consistency. An FC/APC connector terminates the fiber to enable connections to other systems without concern for high noise interference. Coherent® High Performance OBIS™ LX/LS Fiber-Pigtailed Laser Systems produce high-quality, low-noise laser beams and also allow for hands-free operation. These fiber-pigtailed lasers are used in confocal microscopy, DNA sequencing, polymerase chain reaction (PCR) diagnostic instruments, flow cytometry, medical imaging, and instrumentation applications.