


[See all 33 Products in Family](#)

LUCID Vision Labs Atlas™ ATL071S-CC, Sony IMX420, 7.1MP, Color Camera (Recertified 05-P)

See More by [LUCID Vision Labs™](#)

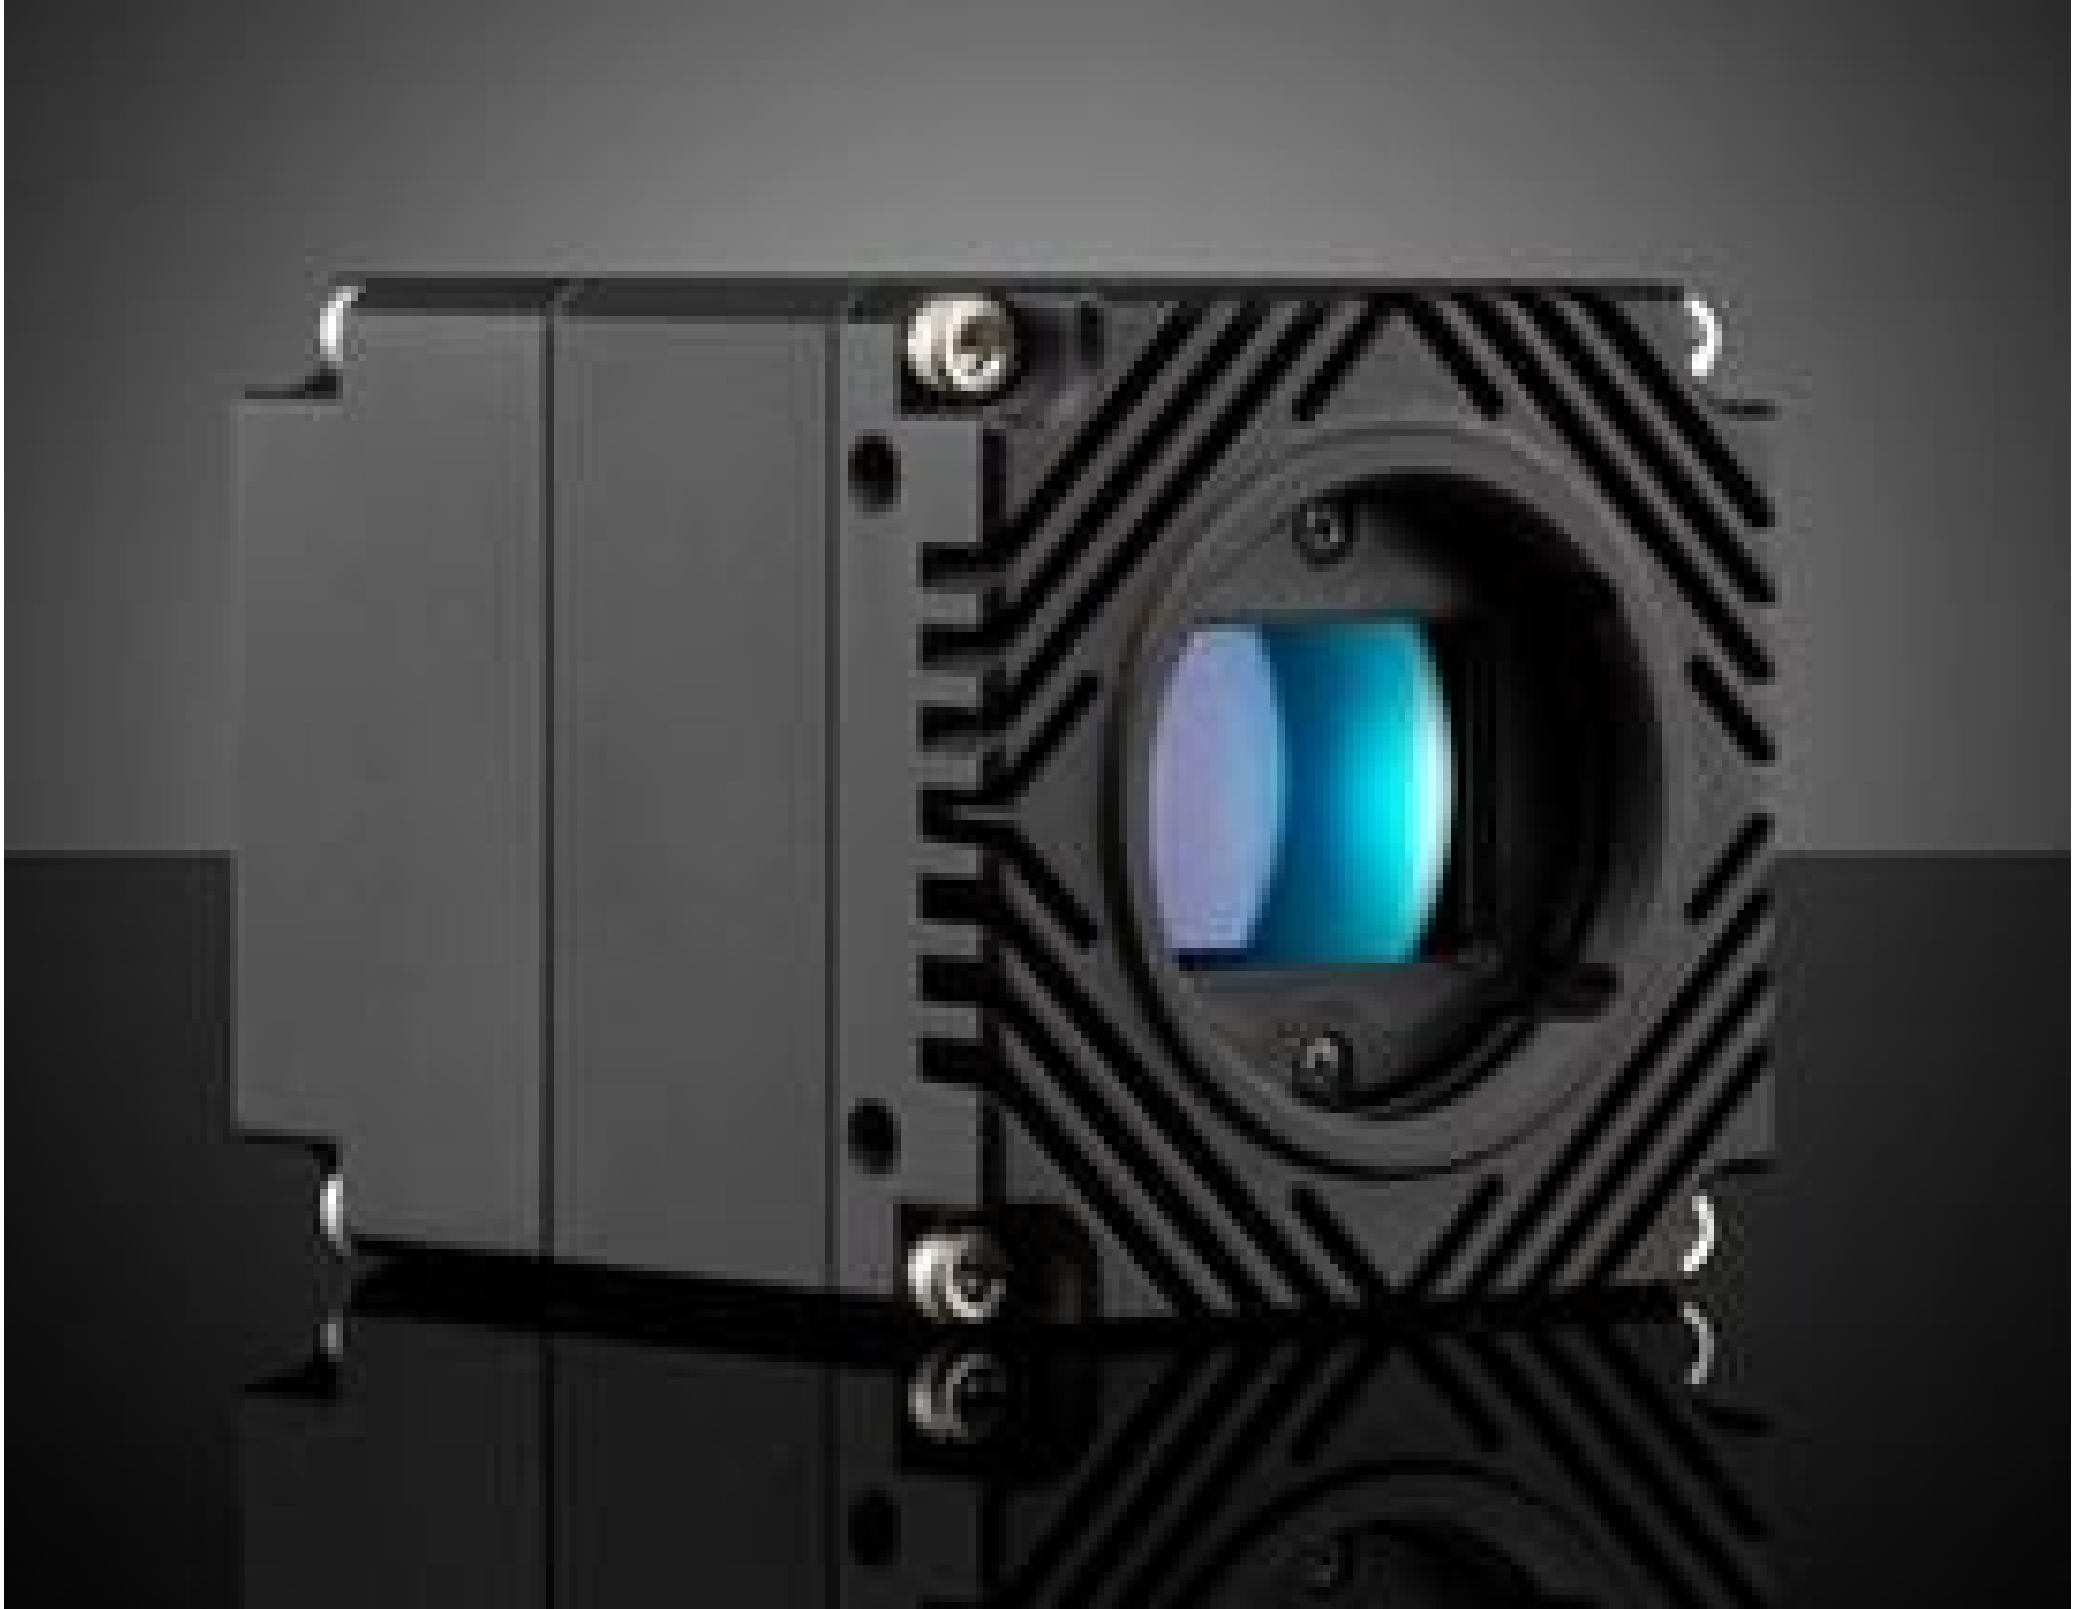

LUCID Vision Labs Atlas™ Power over Ethernet (PoE) 5GBASE-T (5GigE) Cameras

Stock #17-111-RCD-05P **RECERTIFIED** 1 In Stock

[Similar Cameras](#)

⊖ 1 ⊕ €1.836⁰⁰

ADD TO CART

Volume Pricing	
Qty 1+	€1.836,00 each
Need More?	Request Quote

ⓘ Prices shown are exclusive of VAT/local taxes

Product Downloads

Color **Spectrum:**

General

Color Camera **Type:**

ATL071S-CC **Model Number:**

Lucid Vision Labs
Atlas™

Manufacturer:
Camera Series:

Physical & Mechanical Properties

55 x 55 x 70 (excludes connectors and lens mount)
240

Dimensions (mm):
Weight (g):

Full

Housing:

Sensor

380MB
1.1"

Image Buffer:
Sensor Format:

7.10
74.60

Resolution (Megapixels):
Frame Rate (fps):

3,208 x 2,200
4.5 x 4.5

Pixels (H x V):
Pixel Size, H x V (µm):

14.44 x 9.90
Sony IMX420

Sensing Area, H x V (mm):
Imaging Sensor:

Progressive Scan CMOS
Global

Type of Sensor:
Shutter Type:

8/10/12 Bit
13.7µs - 10s

Pixel Depth:
Exposure Time:

71.92
GigE Vision v2.0

Dynamic Range (dB):
Machine Vision Standard:

Electrical

7 (External Power Supply) 8 (PoE)

Power Consumption (W):

Hardware & Interface Connectivity

5GigE (PoE)
5GigE, M12

Interface:
Connector:

Power Supply Required and Sold Separately.
USA: [#18-364](#)
Europe: [#18-364](#)
Japan: [#18-364](#)
Korea: Not Available
China: [#18-364](#)

Power Supply:

1 opto-isolated input, 1 opto-isolated output, 2 non-isolated bi-directional ports

GPIOs:

Hardware Trigger (GPIO), Software Trigger, or PTP (IEEE 1588)

Synchronization:

Back Panel

Interface Port Orientation:

8-pin MB

GPIO Connector Type:

Threading & Mounting

C-Mount

Mount:

1/4-20 with Tripod Mount Adapter [#13-751](#)

Mounting Threads:

Environmental & Durability Factors

-20 to +55 **Operating Temperature (°C):**

-30 to +60 **Storage Temperature (°C):**

Regulatory Compliance

[View](#) **Certificate of Conformance:**

Product Details

- 5GBASE-T (5GigE) Ethernet Interface
- 2.8 to 31.4 Megapixel Sensors
- Compact 55 x 55 x 70mm Design
- TFL-Mount Compatible with [TECHSPEC® CA Series FFL Lenses](#)

LUCID Vision Labs Atlas™ Power over Ethernet (PoE) 5GBASE-T (5GigE) Cameras have a small footprint and feature large format, high resolution sensors with up to 31.4MP at 17.9fps. During manufacturing, their imaging sensors are actively aligned to minimize sensor tilt and rotation, resulting in sharp and crisp images even in the corners. The 5GigE Ethernet interface provides up to 5X faster speeds than GigE for applications requiring high bandwidth. These cameras also feature a TFL-Mount that is easily adaptable to F-Mount. LUCID Vision Labs Atlas Power over Ethernet (PoE) 5GBASE-T (5GigE) Cameras are ideal for industrial applications including [factory automation](#), autonomous robotics, and biometrics.
