

[See all 75 Products in Family](#)

LightPath 355561 | 15mm Dia., 0.60 NA, BBAR (1050-1600nm), Molded Aspheric Lens

See More by [Lightpath®](#)



Precision Molded Aspheric Lenses

Stock **#37-107** **20+ In Stock**

[Other Coating Options](#)

⊖ 1 ⊕ €85.⁰⁰

ADD TO CART

Volume Pricing	
Qty 1-10	€85,00 each
Qty 11-49	€76,50 each
Need More?	Request Quote

ⓘ Prices shown are exclusive of VAT/local taxes

Product Downloads

General

355561 **Lightpath Lens Code:**

Aspheric Lens **Type:**

Collimate or Focus Laser Light **Typical Applications:**

Physical & Mechanical Properties

15.00 ±0.015 **Diameter (mm):**

12.5 **Clear Aperture CA (mm):**

2.56 **Edge Thickness ET (mm):**

5.38 ±0.05 **Center Thickness CT (mm):**

Protective as needed **Bevel:**

Optical Properties

10.00 @ 850nm **Effective Focal Length EFL (mm):**

0.60 **Numerical Aperture NA:**

[D-ZLaF52LA](#) **Substrate:** □

±1 **Focal Length Tolerance (%):**

850 **Aspheric Design Wavelength (nm):**

BBAR (1050-1600nm) **Coating:**

$R_{\text{abs}} < 1.0\%$ @ 1050 - 1600nm **Coating Specification:**

60-40 **Surface Quality:**

0.83 **f#:**

40.79 **Abbe Number (v_d):**

1.806 **Index of Refraction (n_d):**

1050 - 1600 **Wavelength Range (nm):**

7 **Working Distance (mm):**

Infinite **Conjugate Distance:**

850.00 **Focal Length Specification Wavelength (nm):**

< 0.40 **Transmitted Wavefront Error (λ , RMS):**

Material Properties

6.9 **Coefficient of Thermal Expansion CTE ($10^{-6}/^{\circ}\text{C}$):**

Environmental & Durability Factors

≤200 **Operating Temperature ($^{\circ}\text{C}$):**

Regulatory Compliance

[Compliant](#) **RoHS 2015:**

[View](#) **Certificate of Conformance:**


[Compliant](#) **Reach 247:**

Product Details

- Eliminate Spherical Aberration
- Multiple Coating Options Available
- Range of Numerical Apertures

LightPath® Geltech™ Molded Aspheric Lenses are used to eliminate spherical aberration and improve focusing and collimating accuracy in a variety of laser applications. Low NA aspheric lenses are designed to maintain beam shape, while high NA lenses gather all available light to maintain beam power over long distances. LightPath® Geltech™ Molded Aspheric Lenses are ideal for applications including sighting systems, bar code scanners, laser diode-to-fiber coupling, optical data storage, or biomedical lasers.

Technical Information

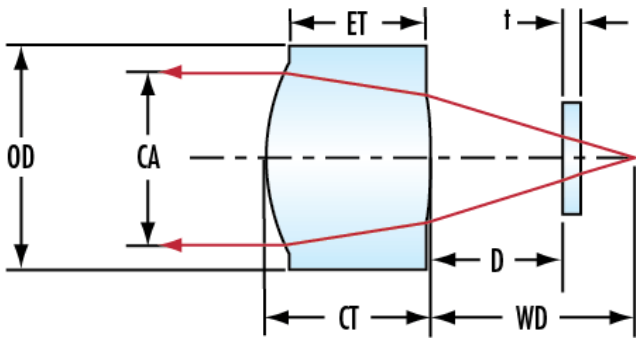

Compatible Mounts