

[See all 17 Products in Family](#)

100x100mm Half Mirror Coaxial Light White

See More by [CCS](#)



Stock #21-838 **1 In Stock**

⊖ 1 ⊕ €5.770⁰⁰

ADD TO CART

Volume Pricing	
Qty 1+	€5.770,00 each
Need More?	Request Quote

⚠ Prices shown are exclusive of VAT/local taxes

Product Downloads

General

LFV3-G-100SW **Model Number:**

LED Illuminator **Type of Illumination:**

CCS **Manufacturer:**

Coaxial Light **Geometry:**

Constant **Illumination Mode:**

Physical & Mechanical Properties

Dimensions (mm):
W 110 mm x D 183 mm x H 105 mm

Weight (g):
990

Active Area (mm):
100 mm x 102 mm

Optical Properties

Color:
White

Electrical

Power Consumption (W):
34

Hardware & Interface Connectivity

Input Voltage (V):
24

Power Supply:
Power Supply Required and Sold Separately:
USA: [#73-491](#)
Europe: [#73-491](#)
Japan: [#89-513](#)
Korea: [#33-773](#)
China: [#73-491](#)

Environmental & Durability Factors

Color Temperature (K):
7000

Regulatory Compliance

RoHS 2015:
[Exempt](#)

Reach 224:
[Contains SVHC\(s\)](#)

Certificate of Conformance:
[View](#)


Product Details

- Unique Design Prevents Ghost Images
- Available in Red, White, and Blue
- Ideal for Use with High Resolution Cameras

CCS High-Resolution Coaxial Lights are designed to provide diffused lighting for high-resolution imaging of shiny, flat surfaces. Designed to prevent ghost reflections and achieve higher system resolution, these coaxial lights integrate a unique thin beamsplitter to minimize deviation through in the imaging path. CCS High-Resolution Coaxial Lights are ideal for industrial imaging applications including inspection of glossy surfaces, pattern detection on PCBs, and measuring dimensions of glass.

Technical Information

Imaging Example: Imaging Comparison of Resolution Evaluation Chart

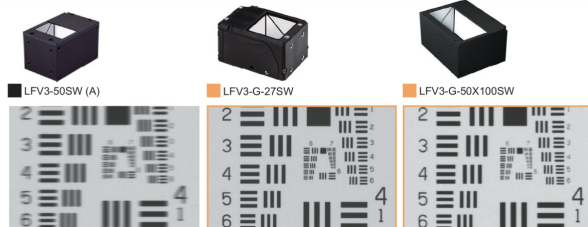

[Imaging conditions] Camera: 2448x2048 3.45 µm monochrome camera, Lens: 2x telecentric lens, Field of view: 4.2 x 3.5 mm (the image is a subset of about 1.3 x 1.0 mm at the center), Resolution: 1.7 µm/pixel, WD: 100 mm, WVD: 25 mm. *The shutter speed and light intensity are adjusted for each image.