

TECHSPEC<sup>®</sup> 15mm Dia., Vacuum UV (VUV) Mirror



Precision Ultraviolet Mirrors

Stock #18-727 14 In Stock

-

1

+

€300<sup>00</sup>

ADD TO CART

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-5        | €300,00 each                  |
| Qty 6-25       | €238,00 each                  |
| Qty 26-49      | €224,00 each                  |
| Need More?     | <a href="#">Request Quote</a> |

 Prices shown are exclusive of VAT/local taxes

Product Downloads

| General                          |                |
|----------------------------------|----------------|
| Flat Mirror                      | Type:          |
| Physical & Mechanical Properties |                |
| 15.00 +0.0/-0.2                  | Diameter (mm): |
|                                  | Back Surface:  |

|                   |                       |
|-------------------|-----------------------|
| Commercial Polish |                       |
| 90                | Clear Aperture (%):   |
|                   |                       |
| <30               | Parallelism (arcsec): |
|                   |                       |
| Thickness (mm):   |                       |
| 3.00 ±0.20        |                       |

|                                     |                         |
|-------------------------------------|-------------------------|
| Optical Properties                  |                         |
| λ/10                                | Surface Flatness (P-V): |
|                                     |                         |
| Substrate: <input type="text"/>     |                         |
| Fused Silica (Corning 7980)         |                         |
| 20-10                               | Surface Quality:        |
|                                     |                         |
| Coating Specification:              |                         |
| R <sub>avg</sub> ≥78% @ 120 - 125nm |                         |
| R <sub>avg</sub> ≥85% @ 120 - 600nm |                         |
| Coating:                            |                         |
| Enhanced Aluminum (120-600nm)       |                         |
| Coating Type:                       |                         |
| Metal                               |                         |
| Angle of Incidence (°):             |                         |
| 0                                   |                         |
| Design Wavelength DWL (nm):         |                         |
| 120                                 |                         |
| Wavelength Range (nm):              |                         |
| 120 - 600                           |                         |

|                       |  |
|-----------------------|--|
| Material Properties   |  |
| Vacuum Compatibility: |  |
| 10 <sup>-7</sup> Torr |  |

|                             |  |
|-----------------------------|--|
| Regulatory Compliance       |  |
| RoHS 2015:                  |  |
| Compliant                   |  |
| Certificate of Conformance: |  |
| View                        |  |
| REACH 241:                  |  |
| Compliant                   |  |


## Product Details


- 120nm and 190nm Design Wavelengths
- Average Reflectivity >85% Across Specified Range
- Enhanced Metallic Coatings for Broadband Reflectivity through the Visible Region

TECHSPEC® Precision Ultraviolet Mirrors are ideal for most commercially available light sources and are offered in both Deep UV (DUV) and Vacuum UV (VUV) enhanced coating options. The DUV coating offers excellent reflection from 190nm to the long-wave infrared (LWIR), while the VUV coating has optimized reflection from 120nm to the LWIR. These mirrors are designed for 0° angle of incidence and feature an aluminum-based coating for low polarization sensitivity. TECHSPEC® Precision Ultraviolet Mirrors have an average reflectivity of greater than 85% across a specified range. The mirrors are available in diameters ranging from 5 to 50mm.

**Note:** The soft coating can be easily damaged by fingerprints and aerosols.

## Technical Information

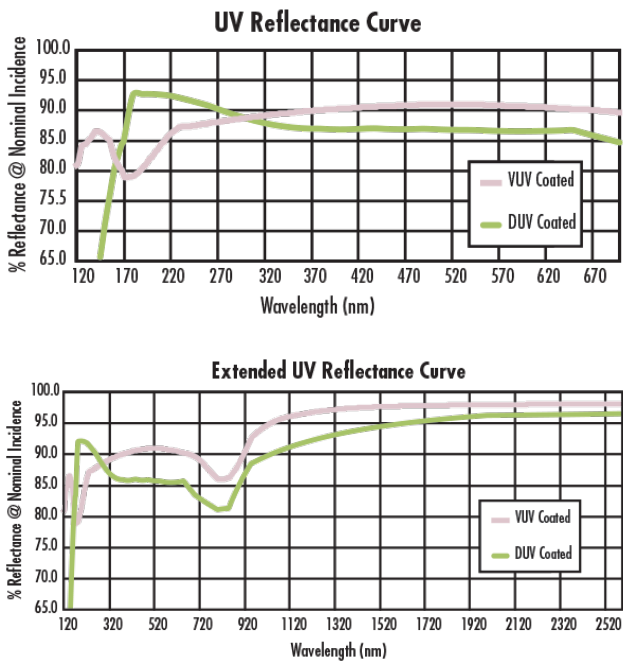

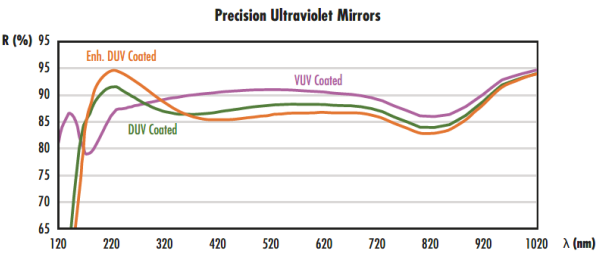

## Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools

## Compatible Mounts

---